SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_fp_base = 3550

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Apr-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

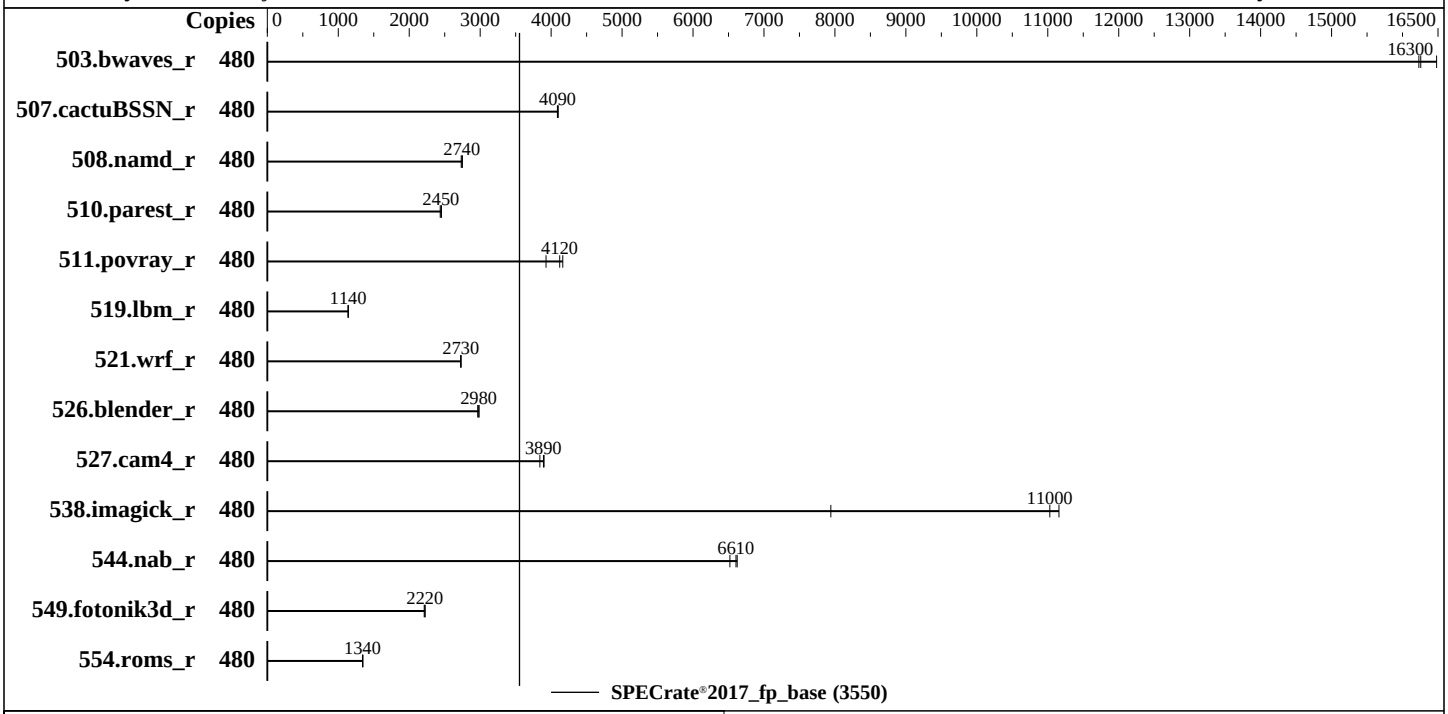

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	480 cores, 8 chips
Orderable:	8 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x SATA SSD, 1.92TB
Other:	1 x Fujitsu PRAID EP740i Raid Card

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Fujitsu BIOS Version V1.0.0.0 R1.2.0 for D4029-C1x. Released Jun-2023 tested as V1.0.0.0 R0.11.0 for D4029-C1x Feb-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_fp_base = 3550

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Apr-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	480	292	16500	**296**	**16300**	297	16200							
507.cactuBSSN_r	480	149	4090	148	4100	**148**	**4090**							
508.namd_r	480	167	2730	166	2750	**166**	**2740**							
510.parest_r	480	512	2450	515	2440	**513**	**2450**							
511.povray_r	480	**272**	**4120**	269	4160	285	3930							
519.lbm_r	480	444	1140	444	1140	**444**	**1140**							
521.wrf_r	480	394	2730	395	2720	**394**	**2730**							
526.blender_r	480	**245**	**2980**	247	2960	245	2980							
527.cam4_r	480	219	3840	215	3900	**216**	**3890**							
538.imagick_r	480	107	11200	**108**	**11000**	150	7940							
544.nab_r	480	122	6620	**122**	**6610**	124	6520							
549.fotonik3d_r	480	841	2220	846	2210	**842**	**2220**							
554.roms_r	480	**568**	**1340**	568	1340	566	1350							

SPECrate®2017_fp_base = 3550

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/benchmark/speccpu/lib/intel64:/home/benchmark/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Hyper-Threading = Disabled
SNC (Sub NUMA) = Enable SNC4

Sysinfo program /home/benchmark/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Apr 10 18:47:25 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   18:47:25 up 3 min,  2 users,  load average: 19.55, 31.39, 14.43
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                18:45    1:16   0.06s  0.06s -bash
  root     pts/0    192.168.1.114    18:46   13.00s  2.51s  0.37s -bash
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 16510327
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 16510327
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root@pts/0
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 -c
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=240 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 --configfile
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=240 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
   rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/benchmark/speccpu

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b000161
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 60
    siblings        : 60
    8 physical ids (chips)
    480 processors (hardware threads)
    physical id 0: core ids 0-59
    physical id 1: core ids 0-59
    physical id 2: core ids 0-59
    physical id 3: core ids 0-59
    physical id 4: core ids 0-59
```

(Continued on next page)

Platform Notes (Continued)

```
     physical id 5: core ids 0-59
     physical id 6: core ids 0-59
     physical id 7: core ids 0-59
     physical id 0: apicids
     0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
     ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
     physical id 1: apicids
     128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
     80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
     2,234,236,238,240,242,244,246
     physical id 2: apicids
     256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
     08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
     0,362,364,366,368,370,372,374
     physical id 3: apicids
     384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
     36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
     8,490,492,494,496,498,500,502
     physical id 4: apicids
     512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
     64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
     6,618,620,622,624,626,628,630
     physical id 5: apicids
     640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,6
     92,694,696,698,700,702,704,706,708,710,712,714,716,718,720,722,724,726,728,730,732,734,736,738,740,742,74
     4,746,748,750,752,754,756,758
     physical id 6: apicids
     768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,808,810,812,814,816,818,8
     20,822,824,826,828,830,832,834,836,838,840,842,844,846,848,850,852,854,856,858,860,862,864,866,868,870,87
     2,874,876,878,880,882,884,886
     physical id 7: apicids
     896,898,900,902,904,906,908,910,912,914,916,918,920,922,924,926,928,930,932,934,936,938,940,942,944,946,9
     48,950,952,954,956,958,960,962,964,966,968,970,972,974,976,978,980,982,984,986,988,990,992,994,996,998,10
     00,1002,1004,1006,1008,1010,1012,1014
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          480
   On-line CPU(s) list:             0-479
   Vendor ID:                       GenuineIntel
   Model name:                      Intel(R) Xeon(R) Platinum 8490H
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              1
   Core(s) per socket:              60
   Socket(s):                       8
   Stepping:                        8
   CPU max MHz:                     3500.0000
   CPU min MHz:                     800.0000
   BogoMIPS:                        3800.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)

Platform Notes (Continued)

```
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_l1d arch_capabilities
  Virtualization:       VT-x
  L1d cache:            22.5 MiB (480 instances)
  L1i cache:            15 MiB (480 instances)
  L2 cache:             960 MiB (480 instances)
  L3 cache:             900 MiB (8 instances)
  NUMA node(s):         32
  NUMA node0 CPU(s):    0-14
  NUMA node1 CPU(s):    15-29
  NUMA node2 CPU(s):    30-44
  NUMA node3 CPU(s):    45-59
  NUMA node4 CPU(s):    60-74
  NUMA node5 CPU(s):    75-89
  NUMA node6 CPU(s):    90-104
  NUMA node7 CPU(s):    105-119
  NUMA node8 CPU(s):    120-134
  NUMA node9 CPU(s):    135-149
  NUMA node10 CPU(s):   150-164
  NUMA node11 CPU(s):   165-179
  NUMA node12 CPU(s):   180-194
  NUMA node13 CPU(s):   195-209
  NUMA node14 CPU(s):   210-224
  NUMA node15 CPU(s):   225-239
  NUMA node16 CPU(s):   240-254
  NUMA node17 CPU(s):   255-269
  NUMA node18 CPU(s):   270-284
  NUMA node19 CPU(s):   285-299
  NUMA node20 CPU(s):   300-314
  NUMA node21 CPU(s):   315-329
  NUMA node22 CPU(s):   330-344
  NUMA node23 CPU(s):   345-359
  NUMA node24 CPU(s):   360-374
  NUMA node25 CPU(s):   375-389
  NUMA node26 CPU(s):   390-404
  NUMA node27 CPU(s):   405-419
  NUMA node28 CPU(s):   420-434
  NUMA node29 CPU(s):   435-449
  NUMA node30 CPU(s):   450-464
  NUMA node31 CPU(s):   465-479
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v2:         Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:              Not affected
  Vulnerability Tsx async abort:    Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K    22.5M   12 Data            1     64        1             64
     L1i       32K      15M    8 Instruction     1     64        1             64
     L2         2M     960M   16 Unified         2   2048        1             64
     L3     112.5M     900M   15 Unified         3 122880        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 32 nodes (0-31)
  node 0 cpus: 0-14
  node 0 size: 128469 MB
  node 0 free: 126798 MB
  node 1 cpus: 15-29
  node 1 size: 129020 MB
  node 1 free: 128406 MB
  node 2 cpus: 30-44
  node 2 size: 129020 MB
  node 2 free: 128470 MB
  node 3 cpus: 45-59
  node 3 size: 129020 MB
  node 3 free: 128428 MB
  node 4 cpus: 60-74
  node 4 size: 129020 MB
  node 4 free: 128597 MB
  node 5 cpus: 75-89
  node 5 size: 129020 MB
  node 5 free: 128650 MB
  node 6 cpus: 90-104
  node 6 size: 129020 MB
  node 6 free: 128614 MB
  node 7 cpus: 105-119
  node 7 size: 129020 MB
  node 7 free: 128620 MB
  node 8 cpus: 120-134
  node 8 size: 129020 MB
  node 8 free: 128771 MB
  node 9 cpus: 135-149
  node 9 size: 129020 MB
  node 9 free: 128711 MB
  node 10 cpus: 150-164
  node 10 size: 129020 MB
  node 10 free: 128760 MB
  node 11 cpus: 165-179
  node 11 size: 129020 MB
  node 11 free: 128816 MB
  node 12 cpus: 180-194
  node 12 size: 129020 MB
  node 12 free: 128767 MB
  node 13 cpus: 195-209
  node 13 size: 129020 MB
  node 13 free: 128792 MB
  node 14 cpus: 210-224
  node 14 size: 129020 MB
  node 14 free: 128743 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 15 cpus: 225-239
  node 15 size: 129020 MB
  node 15 free: 128789 MB
  node 16 cpus: 240-254
  node 16 size: 129020 MB
  node 16 free: 128798 MB
  node 17 cpus: 255-269
  node 17 size: 129020 MB
  node 17 free: 128771 MB
  node 18 cpus: 270-284
  node 18 size: 129020 MB
  node 18 free: 128790 MB
  node 19 cpus: 285-299
  node 19 size: 129020 MB
  node 19 free: 128769 MB
  node 20 cpus: 300-314
  node 20 size: 129020 MB
  node 20 free: 128762 MB
  node 21 cpus: 315-329
  node 21 size: 129020 MB
  node 21 free: 128782 MB
  node 22 cpus: 330-344
  node 22 size: 129020 MB
  node 22 free: 128787 MB
  node 23 cpus: 345-359
  node 23 size: 129020 MB
  node 23 free: 128784 MB
  node 24 cpus: 360-374
  node 24 size: 129020 MB
  node 24 free: 128763 MB
  node 25 cpus: 375-389
  node 25 size: 129020 MB
  node 25 free: 128819 MB
  node 26 cpus: 390-404
  node 26 size: 129020 MB
  node 26 free: 128811 MB
  node 27 cpus: 405-419
  node 27 size: 129020 MB
  node 27 free: 128703 MB
  node 28 cpus: 420-434
  node 28 size: 128985 MB
  node 28 free: 128769 MB
  node 29 cpus: 435-449
  node 29 size: 129020 MB
  node 29 free: 128780 MB
  node 30 cpus: 450-464
  node 30 size: 129020 MB
  node 30 free: 128791 MB
  node 31 cpus: 465-479
  node 31 size: 128569 MB
  node 31 free: 128330 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
  25  26  27  28  29  30  31
    0:  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  31  31  31  31
    1:  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  31  31  31  31
    2:  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  31  31  31  31
```

(Continued on next page)

Platform Notes (Continued)

```
  3:  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
  4:  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  5:  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  6:  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  7:  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  8:  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  9:  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
 10:  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
 11:  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
 12:  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21
 21  21  21  31  31  31  31
 13:  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21
 21  21  21  31  31  31  31
 14:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21
 21  21  21  31  31  31  31
 15:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21
 21  21  21  31  31  31  31
 16:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21
 21  21  21  31  31  31  31
 17:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21
 21  21  21  31  31  31  31
 18:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21
 21  21  21  31  31  31  31
 19:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21
 21  21  21  31  31  31  31
 20:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12  31
 31  31  31  21  21  21  21
 21:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12  31
 31  31  31  21  21  21  21
 22:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12  31
 31  31  31  21  21  21  21
 23:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10  31
 31  31  31  21  21  21  21
 24:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  10
 12  12  12  21  21  21  21
 25:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
 10  12  12  21  21  21  21
 26:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
 12  10  12  21  21  21  21
 27:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
 12  12  10  21  21  21  21
 28:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
 21  21  21  10  12  12  12
 29:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
 21  21  21  12  10  12  12
 30:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
 21  21  21  12  12  10  12
 31:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
 21  21  21  12  12  12  10

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 9. /proc/meminfo
    MemTotal:       4226668720 kB

------------------------------------------------------------
10. who -r
  run-level 3 Apr 10 18:45

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@
                   haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor
                   nscd postfix purge-kernels rollback rsyslog sep5 smartd sshd wicked wickedd-auto4
                   wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
                   bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
                   cups-browsed debug-shell ebtables exchange-bmc-os-info firewalld gpm grub2-once
                   haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiuio issue-add-ssh-keys kexec-load
                   lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rdisc rpcbind
                   rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                   speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd udisks2 upower
  indirect         wickedd

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=6efa90aa-3ef9-440b-aa41-ad395a2ae50d
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=368M,high
  crashkernel=72M,low

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.50 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/benchmark/speccpu
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      xfs   1.8T   58G  1.7T   4% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:          FUJITSU
    Product:         n/a
    Product Family: SERVER
    Serial:          n/a

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
```

(Continued on next page)

Platform Notes (Continued)

```
     7x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
     31x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
     26x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       FUJITSU
    BIOS Version:      V1.0.0.0 R0.11.0 for D4029-C1x
    BIOS Date:         02/28/2023
    BIOS Revision:     0.11
    Firmware Revision: 2.0
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:
```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-10 05:47:24-0400.
Report generated on 2023-05-09 16:02:11 by CPU2017 PS formatter v6716.
Originally published on 2023-05-09.