SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1850

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

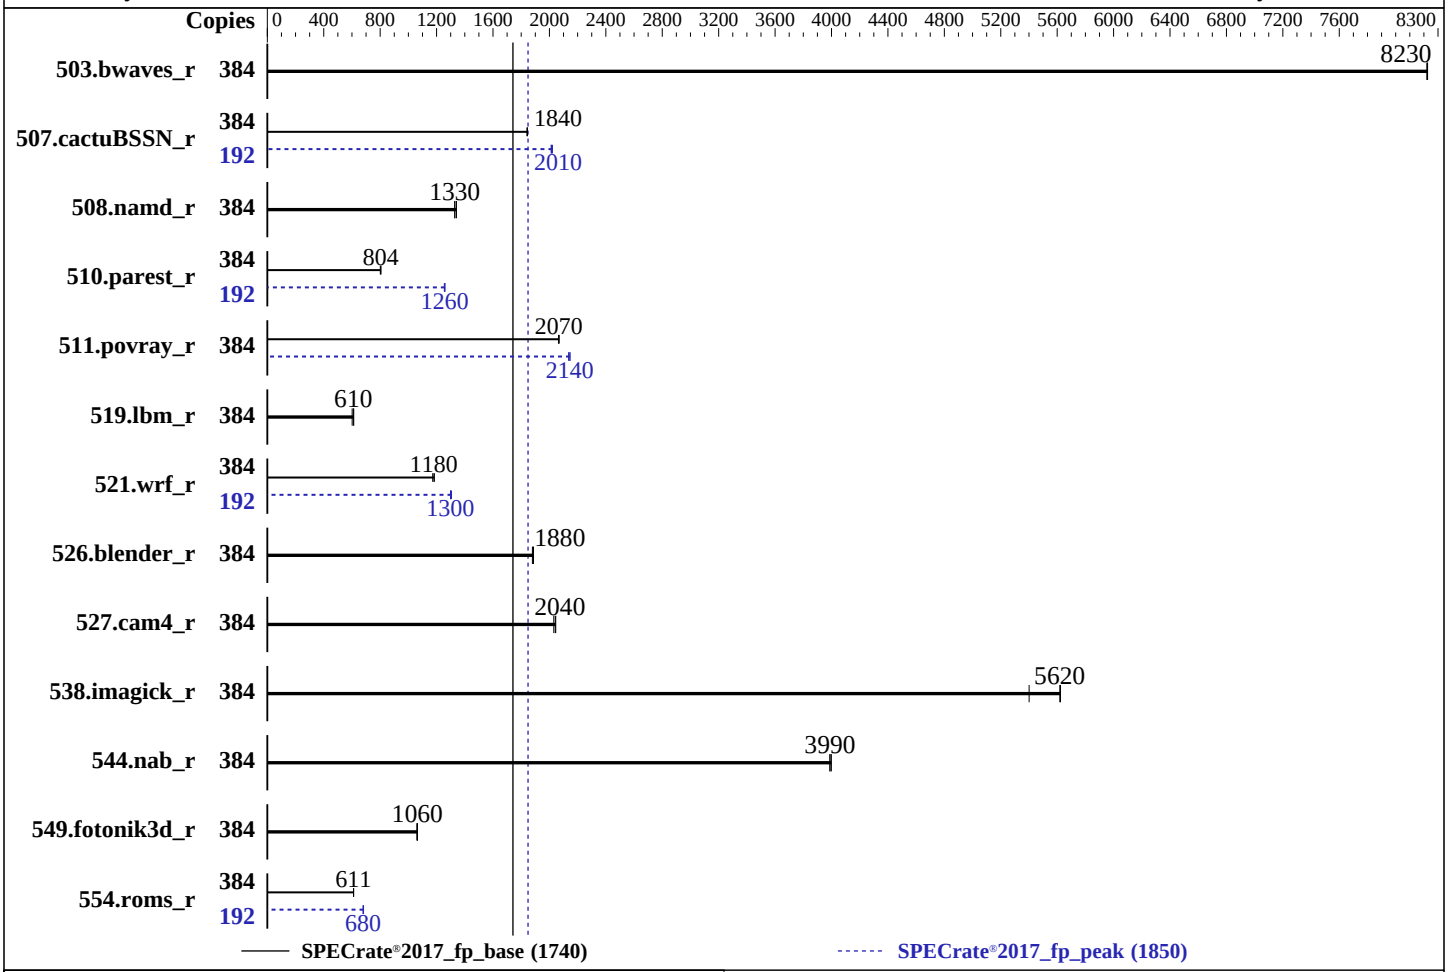

Hardware

CPU Name:	Intel Xeon Platinum 8468H
Max MHz:	3800
Nominal:	2100
Enabled:	192 cores, 4 chips, 2 threads/core
Orderable:	1, 2, 4 chip(s)
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Ubuntu 22.04.1 LTS Kernel 5.15.0-43-generic
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	HPE BIOS Version v1.30 03/01/2023 released Mar-2023
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL560 Gen11
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1850

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	468	8220	**468**	**8230**	468	8230	384	468	8220	**468**	**8230**	468	8230
507.cactuBSSN_r	384	264	1840	**264**	**1840**	264	1840	192	**121**	**2010**	120	2020	121	2010
508.namd_r	384	275	1330	**274**	**1330**	272	1340	384	275	1330	**274**	**1330**	272	1340
510.parest_r	384	**1249**	**804**	1254	801	1248	805	192	**399**	**1260**	399	1260	400	1250
511.povray_r	384	**434**	**2070**	433	2070	434	2060	384	**418**	**2140**	420	2140	418	2150
519.lbm_r	384	673	601	**663**	**610**	661	613	384	673	601	**663**	**610**	661	613
521.wrf_r	384	734	1170	**728**	**1180**	727	1180	192	329	1310	331	1300	**331**	**1300**
526.blender_r	384	**310**	**1880**	310	1890	311	1880	384	**310**	**1880**	310	1890	311	1880
527.cam4_r	384	331	2030	328	2040	**329**	**2040**	384	331	2030	328	2040	**329**	**2040**
538.imagick_r	384	177	5400	**170**	**5620**	170	5620	384	177	5400	**170**	**5620**	170	5620
544.nab_r	384	162	3990	**162**	**3990**	162	4000	384	162	3990	**162**	**3990**	162	4000
549.fotonik3d_r	384	1412	1060	**1406**	**1060**	1406	1060	384	1412	1060	**1406**	**1060**	1406	1060
554.roms_r	384	997	612	**999**	**611**	999	611	192	**449**	**680**	449	679	447	682

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1850

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
perf-bias for all the CPUs is set using "cpupower set -b 0"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
The system ROM used for this result contains Intel microcode version 0x2b0001b0 for
the Intel Xeon Platinum 8468H Processor
BIOS Configuration
 Workload Profile set to General Throughput Compute
 Memory Patrol Scrubbing set to Disabled
 Last Level Cache (LLC) Dead Line Allocation set to Disabled
 Enhanced Processor Performance Profile set to Aggressive
 Thermal Configuration set to Maximum Cooling
 Workload Profile set to Custom
  Adjacent Sector Prefetch set to Disabled
  DCU Stream Prefetcher set to Disabled
  Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on admin1 Fri Apr 28 00:41:47 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
```

(Continued on next page)

Platform Notes (Continued)

```
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux admin1 5.15.0-43-generic #46-Ubuntu SMP Tue Jul 12 10:30:17 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   00:41:47 up 44 min,  3 users,  load average: 0.01, 0.03, 0.00
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  admin1   tty1     -                27Jun22 304days  0.04s  0.00s -bash
  admin1   pts/0    172.16.0.100     27Jun22 304days  0.13s  0.01s sshd: admin1 [priv]
  admin1   pts/1    172.16.0.100     27Jun22 11.00s  1.02s  0.13s sudo -i

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       admin1

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 132050020
  process              4126124
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: admin1 [priv]
 sshd: admin1@pts/0
 -bash
 sudo -i
 sudo -i
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 -c
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 --configfile
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8468H
```

(Continued on next page)

Platform Notes (Continued)

```
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 143
     stepping        : 6
     microcode       : 0x2b0001b0
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
     cpu cores       : 48
     siblings        : 96
     4 physical ids (chips)
     384 processors (hardware threads)
     physical id 0: core ids 0-47
     physical id 1: core ids 0-47
     physical id 2: core ids 0-47
     physical id 3: core ids 0-47
     physical id 0: apicids 0-95
     physical id 1: apicids 128-223
     physical id 2: apicids 256-351
     physical id 3: apicids 384-479
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.2:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          384
   On-line CPU(s) list:             0-383
   Vendor ID:                       GenuineIntel
   Model name:                      Intel(R) Xeon(R) Platinum 8468H
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              2
   Core(s) per socket:              48
   Socket(s):                       4
   Stepping:                        6
   BogoMIPS:                        4200.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                    invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                    vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                                    erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                    clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                    split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                    avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                    cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                    arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                    arch_capabilities
   Virtualization:                  VT-x
   L1d cache:                       9 MiB (192 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
  L1i cache:                       6 MiB (192 instances)
  L2 cache:                        384 MiB (192 instances)
  L3 cache:                        420 MiB (4 instances)
  NUMA node(s):                    16
  NUMA node0 CPU(s):               0-11,192-203
  NUMA node1 CPU(s):               12-23,204-215
  NUMA node2 CPU(s):               24-35,216-227
  NUMA node3 CPU(s):               36-47,228-239
  NUMA node4 CPU(s):               48-59,240-251
  NUMA node5 CPU(s):               60-71,252-263
  NUMA node6 CPU(s):               72-83,264-275
  NUMA node7 CPU(s):               84-95,276-287
  NUMA node8 CPU(s):               96-107,288-299
  NUMA node9 CPU(s):               108-119,300-311
  NUMA node10 CPU(s):              120-131,312-323
  NUMA node11 CPU(s):              132-143,324-335
  NUMA node12 CPU(s):              144-155,336-347
  NUMA node13 CPU(s):              156-167,348-359
  NUMA node14 CPU(s):              168-179,360-371
  NUMA node15 CPU(s):              180-191,372-383
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1     64        1             64
     L1i       32K       6M    8 Instruction     1     64        1             64
     L2         2M     384M   16 Unified         2   2048        1             64
     L3       105M     420M   15 Unified         3 114688        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0-11,192-203
  node 0 size: 64092 MB
  node 0 free: 63706 MB
  node 1 cpus: 12-23,204-215
  node 1 size: 64506 MB
  node 1 free: 64286 MB
  node 2 cpus: 24-35,216-227
  node 2 size: 64506 MB
  node 2 free: 64089 MB
  node 3 cpus: 36-47,228-239
  node 3 size: 64506 MB
  node 3 free: 64038 MB
  node 4 cpus: 48-59,240-251
  node 4 size: 64506 MB
  node 4 free: 63960 MB
  node 5 cpus: 60-71,252-263
  node 5 size: 64506 MB
  node 5 free: 64284 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 6 cpus: 72-83,264-275
   node 6 size: 64506 MB
   node 6 free: 64283 MB
   node 7 cpus: 84-95,276-287
   node 7 size: 64506 MB
   node 7 free: 64283 MB
   node 8 cpus: 96-107,288-299
   node 8 size: 64506 MB
   node 8 free: 64196 MB
   node 9 cpus: 108-119,300-311
   node 9 size: 64506 MB
   node 9 free: 64164 MB
   node 10 cpus: 120-131,312-323
   node 10 size: 64506 MB
   node 10 free: 64277 MB
   node 11 cpus: 132-143,324-335
   node 11 size: 64506 MB
   node 11 free: 64290 MB
   node 12 cpus: 144-155,336-347
   node 12 size: 64506 MB
   node 12 free: 64108 MB
   node 13 cpus: 156-167,348-359
   node 13 size: 64472 MB
   node 13 free: 63887 MB
   node 14 cpus: 168-179,360-371
   node 14 size: 64506 MB
   node 14 free: 64281 MB
   node 15 cpus: 180-191,372-383
   node 15 size: 64495 MB
   node 15 free: 64268 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
     0:  10  20  30  30  30  30  30  30  30  30  30  30  30  30  30  30
     1:  20  10  30  30  30  30  30  30  30  30  30  30  30  30  30  30
     2:  30  30  10  20  30  30  30  30  30  30  30  30  30  30  30  30
     3:  30  30  20  10  30  30  30  30  30  30  30  30  30  30  30  30
     4:  30  30  30  30  10  20  30  30  30  30  30  30  30  30  30  30
     5:  30  30  30  30  20  10  30  30  30  30  30  30  30  30  30  30
     6:  30  30  30  30  30  30  10  20  30  30  30  30  30  30  30  30
     7:  30  30  30  30  30  30  20  10  30  30  30  30  30  30  30  30
     8:  30  30  30  30  30  30  30  30  10  20  30  30  30  30  30  30
     9:  30  30  30  30  30  30  30  30  20  10  30  30  30  30  30  30
    10:  30  30  30  30  30  30  30  30  30  30  10  20  30  30  30  30
    11:  30  30  30  30  30  30  30  30  30  30  20  10  30  30  30  30
    12:  30  30  30  30  30  30  30  30  30  30  30  30  10  20  30  30
    13:  30  30  30  30  30  30  30  30  30  30  30  30  20  10  30  30
    14:  30  30  30  30  30  30  30  30  30  30  30  30  30  30  10  20
    15:  30  30  30  30  30  30  30  30  30  30  30  30  30  30  20  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056400184 kB

------------------------------------------------------------
10. who -r
  run-level 5 Jun 27 18:30

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
  Default Target  Status
```

(Continued on next page)

Platform Notes (Continued)

```
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD   ACTIVE SUB    DESCRIPTION
  * systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent
                   multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db
                   setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
                   systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
                   ufw unattended-upgrades vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables powertop rsync serial-getty@
                   systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync upower
  generated        apport
  indirect         uuidd
  masked           cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                   x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-5.15.0-43-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         always [madvise] never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.1 LTS

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/cpu2017
  Filesystem                     Type  Size  Used Avail Use% Mounted on
  /dev/mapper/ubuntu--vg-ubuntu--lv ext4   98G   19G   75G  20% /

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL560 Gen11
    Product Family: ProLiant
    Serial:         CNX22605RZ

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    28x Hynix HMCG88AEBRA168N 32 GB 2 rank 4800
    3x Hynix HMCG88MEBRA113N 32 GB 2 rank 4800
    1x Hynix HMCG88MEBRA115N 32 GB 2 rank 4800
    32x UNKNOWN NOT AVAILABLE


------------------------------------------------------------
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      1.30
   BIOS Date:         03/01/2023
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Revision:     1.30
    Firmware Revision: 1.20
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

521.wrf_r: `-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1) `-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.html
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.xml
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-27 20:41:47-0400.
Report generated on 2023-05-23 19:09:07 by CPU2017 PS formatter v6716.
Originally published on 2023-05-23.