SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9754 128-Core Processor)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Nov-2022

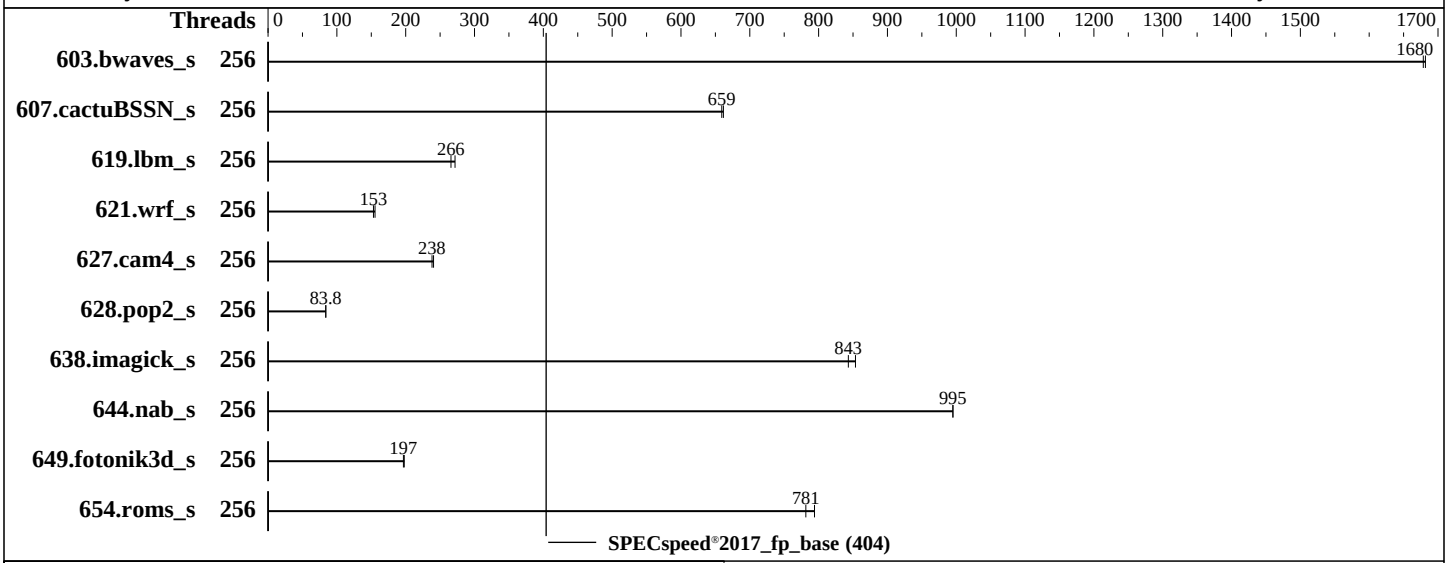

Hardware

CPU Name:	AMD EPYC 9754
Max MHz:	3100
Nominal:	2250
Enabled:	256 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	130 GB on tmpfs
Other:	None

Software

OS:	Ubuntu 22.04.1 LTS 5.15.0-46-generic
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 1.3.11 released Mar-2023
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	256	35.1	1680	**35.1**	**1680**									
607.cactuBSSN_s	256	**25.3**	**659**	25.2	662									
619.lbm_s	256	**19.7**	**266**	19.3	272									
621.wrf_s	256	**86.3**	**153**	85.1	155									
627.cam4_s	256	36.9	240	**37.2**	**238**									
628.pop2_s	256	**142**	**83.8**	141	84.0									
638.imagick_s	256	16.9	854	**17.1**	**843**									
644.nab_s	256	17.6	995	**17.6**	**995**									
649.fotonik3d_s	256	46.1	198	**46.3**	**197**									
654.roms_s	256	**20.1**	**781**	19.8	794									

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To disable THP for peak runs of 621.wrf_s:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.


 Benchmark run from a 130 GB ramdisk created with the cmd: "mount -t tmpfs -o size=130G tmpfs /mnt/ramdisk"
```

Platform Notes

```
 BIOS settings:
            DRAM Refresh Delay : Performance
        DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
             Logical Processor : Disabled
     Virtualization Technology : Disabled
       L3 Cache as NUMA Domain : Enabled

                System Profile : Custom
                      C-States : Disabled
           Memory Patrol Scrub : Disabled
           PCI ASPM L1 Link
              Power Management : Disabled
            Determinism Slider : Power Determinism
      Algorithm Performance
        Boost Disable (ApbDis) : Enabled

 Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
```

(Continued on next page)

Platform Notes (Continued)

```
running on genoa-sut Tue May  2 21:04:06 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux genoa-sut 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   21:04:06 up  1:27,  1 user,  load average: 5.56, 6.26, 3.65
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                19:37    1:25m  2.32s  0.52s /bin/bash ./amd_speed_aocc400_genoa_B1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              6190229
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 /bin/bash ./DELL_speed.sh
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-specspeed.sh --output_format csv,html,pdf,txt -define
   Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1
 python3 ./run_amd_speed_aocc400_genoa_B1.py
 /bin/bash ./amd_speed_aocc400_genoa_B1.sh
 runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
   csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1 fpspeed
 runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
   csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1 --nopower
   --runmode speed --tune base --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9754 128-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 160
    stepping        : 2
    microcode       : 0xaa00205
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 128
    siblings        : 128
    2 physical ids (chips)
    256 processors (hardware threads)
    physical id 0: core ids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
    physical id 1: core ids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
    physical id 0: apicids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
    physical id 1: apicids
    256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4
    64-471,480-487,496-503
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          256
```

(Continued on next page)

Platform Notes (Continued)

```
On-line CPU(s) list:             0-255
Vendor ID:                       AuthenticAMD
Model name:                      AMD EPYC 9754 128-Core Processor
CPU family:                      25
Model:                           160
Thread(s) per core:              1
Core(s) per socket:              128
Socket(s):                       2
Stepping:                        2
Frequency boost:                 enabled
CPU max MHz:                     3101.0000
CPU min MHz:                     400.0000
BogoMIPS:                        4501.50
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                 constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                 pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                 popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                 abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                 perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                 avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                 xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                 avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
                                 lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                 pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                 umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                 avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:                  AMD-V
L1d cache:                       8 MiB (256 instances)
L1i cache:                       8 MiB (256 instances)
L2 cache:                        256 MiB (256 instances)
L3 cache:                        512 MiB (32 instances)
NUMA node(s):                    32
NUMA node0 CPU(s):               0-7
NUMA node1 CPU(s):               8-15
NUMA node2 CPU(s):               64-71
NUMA node3 CPU(s):               72-79
NUMA node4 CPU(s):               32-39
NUMA node5 CPU(s):               40-47
NUMA node6 CPU(s):               96-103
NUMA node7 CPU(s):               104-111
NUMA node8 CPU(s):               48-55
NUMA node9 CPU(s):               56-63
NUMA node10 CPU(s):              112-119
NUMA node11 CPU(s):              120-127
NUMA node12 CPU(s):              16-23
NUMA node13 CPU(s):              24-31
NUMA node14 CPU(s):              80-87
NUMA node15 CPU(s):              88-95
NUMA node16 CPU(s):              128-135
NUMA node17 CPU(s):              136-143
NUMA node18 CPU(s):              192-199
NUMA node19 CPU(s):              200-207
NUMA node20 CPU(s):              160-167
NUMA node21 CPU(s):              168-175
NUMA node22 CPU(s):              224-231
NUMA node23 CPU(s):              232-239
NUMA node24 CPU(s):              176-183
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node25 CPU(s):              184-191
  NUMA node26 CPU(s):              240-247
  NUMA node27 CPU(s):              248-255
  NUMA node28 CPU(s):              144-151
  NUMA node29 CPU(s):              152-159
  NUMA node30 CPU(s):              208-215
  NUMA node31 CPU(s):              216-223
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                   filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       8M    8 Data            1    64        1             64
     L1i       32K       8M    8 Instruction     1    64        1             64
     L2         1M     256M    8 Unified         2  2048        1             64
     L3        16M     512M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 32 nodes (0-31)
  node 0 cpus: 0-7
  node 0 size: 47928 MB
  node 0 free: 47679 MB
  node 1 cpus: 8-15
  node 1 size: 48381 MB
  node 1 free: 48249 MB
  node 2 cpus: 64-71
  node 2 size: 48381 MB
  node 2 free: 48227 MB
  node 3 cpus: 72-79
  node 3 size: 48381 MB
  node 3 free: 48250 MB
  node 4 cpus: 32-39
  node 4 size: 48346 MB
  node 4 free: 48194 MB
  node 5 cpus: 40-47
  node 5 size: 48381 MB
  node 5 free: 48248 MB
  node 6 cpus: 96-103
  node 6 size: 48381 MB
  node 6 free: 48245 MB
  node 7 cpus: 104-111
  node 7 size: 48381 MB
  node 7 free: 48244 MB
  node 8 cpus: 48-55
  node 8 size: 48381 MB
  node 8 free: 48264 MB
  node 9 cpus: 56-63
  node 9 size: 48381 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 9 free: 48253 MB
node 10 cpus: 112-119
node 10 size: 48381 MB
node 10 free: 48248 MB
node 11 cpus: 120-127
node 11 size: 48357 MB
node 11 free: 48227 MB
node 12 cpus: 16-23
node 12 size: 48381 MB
node 12 free: 48240 MB
node 13 cpus: 24-31
node 13 size: 48381 MB
node 13 free: 48244 MB
node 14 cpus: 80-87
node 14 size: 48381 MB
node 14 free: 48245 MB
node 15 cpus: 88-95
node 15 size: 48381 MB
node 15 free: 48246 MB
node 16 cpus: 128-135
node 16 size: 48381 MB
node 16 free: 47087 MB
node 17 cpus: 136-143
node 17 size: 48381 MB
node 17 free: 48176 MB
node 18 cpus: 192-199
node 18 size: 48381 MB
node 18 free: 48152 MB
node 19 cpus: 200-207
node 19 size: 48381 MB
node 19 free: 48157 MB
node 20 cpus: 160-167
node 20 size: 48381 MB
node 20 free: 48182 MB
node 21 cpus: 168-175
node 21 size: 48381 MB
node 21 free: 48176 MB
node 22 cpus: 224-231
node 22 size: 48381 MB
node 22 free: 48190 MB
node 23 cpus: 232-239
node 23 size: 48381 MB
node 23 free: 48217 MB
node 24 cpus: 176-183
node 24 size: 48381 MB
node 24 free: 48210 MB
node 25 cpus: 184-191
node 25 size: 48381 MB
node 25 free: 48189 MB
node 26 cpus: 240-247
node 26 size: 48381 MB
node 26 free: 48185 MB
node 27 cpus: 248-255
node 27 size: 48341 MB
node 27 free: 48132 MB
node 28 cpus: 144-151
node 28 size: 48381 MB
node 28 free: 48175 MB
node 29 cpus: 152-159
node 29 size: 48381 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 29 free: 48218 MB
node 30 cpus: 208-215
node 30 size: 48381 MB
node 30 free: 44674 MB
node 31 cpus: 216-223
node 31 size: 48381 MB
node 31 free: 48192 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
25  26  27  28  29  30  31
  0:  10  11  11  11  11  11  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  1:  11  10  11  11  11  11  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  2:  11  11  10  11  11  11  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  3:  11  11  11  10  11  11  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  4:  11  11  11  11  10  11  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  5:  11  11  11  11  11  10  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  6:  11  11  11  11  11  11  10  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  7:  11  11  11  11  11  11  11  10  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  8:  11  11  11  11  11  11  11  11  10  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  9:  11  11  11  11  11  11  11  11  11  10  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
 10:  11  11  11  11  11  11  11  11  11  11  10  11  11  11  11  11  32  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
 11:  11  11  11  11  11  11  11  11  11  11  11  10  11  11  11  11  32  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
 12:  11  11  11  11  11  11  11  11  11  11  11  11  10  11  11  11  32  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
 13:  11  11  11  11  11  11  11  11  11  11  11  11  11  10  11  11  32  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
 14:  11  11  11  11  11  11  11  11  11  11  11  11  11  11  10  11  32  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
 15:  11  11  11  11  11  11  11  11  11  11  11  11  11  11  11  10  32  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
 16:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  11  11  11  11  11  11
11  11  11  11  11  11  11
 17:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  11  11  11  11  11  11
11  11  11  11  11  11  11
 18:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  11  11  11  11  11  11
11  11  11  11  11  11  11
 19:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  10  11  11  11  11  11
11  11  11  11  11  11  11
 20:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  10  11  11  11  11
11  11  11  11  11  11  11
 21:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  10  11  11  11
11  11  11  11  11  11  11
 22:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  10  11  11
11  11  11  11  11  11  11
 23:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  10  11
11  11  11  11  11  11  11
 24:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11  10
11  11  11  11  11  11  11
```

(Continued on next page)

Platform Notes (Continued)

```
   25:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11  11
   10  11  11  11  11  11  11
   26:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11  11
   11  10  11  11  11  11  11
   27:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11  11
   11  11  10  11  11  11  11
   28:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11  11
   11  11  11  10  11  11  11
   29:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11  11
   11  11  11  11  10  11  11
   30:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11  11
   11  11  11  11  11  10  11
   31:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  11  11
   11  11  11  11  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584812544 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 2 19:37

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager blk-availability cloud-config cloud-final cloud-init cloud-init-local
                   console-setup cron dmesg e2scrub_reap finalrd getty@ grub-common grub-initrd-fallback
                   irqbalance keyboard-setup lm-sensors lvm2-monitor lxd-agent networkd-dispatcher open-iscsi
                   open-vm-tools pollinate rsync rsyslog secureboot-db setvtrgb ssh systemd-networkd
                   systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald
                   tuned ua-reboot-cmds ubuntu-advantage udisks2 vgauth
  enabled-runtime  netplan-ovs-cleanup rc-local systemd-remount-fs
  disabled         apparmor console-getty debug-shell iscsid multipathd nftables powertop serial-getty@
                   smartmontools sysstat systemd-boot-check-no-failures systemd-network-generator
                   systemd-sysext systemd-time-wait-sync ufw upower
  generated        apport
  indirect         uuidd
  masked           accounts-daemon alsa-utils atd cryptdisks cryptdisks-early gpu-manager hwclock lvm2
                   multipath-tools-boot rc rcS screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-5.15.0-46-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 400 MHz and 3.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
```

(Continued on next page)

Platform Notes (Continued)

```
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2250MHz

------------------------------------------------------------
15. tuned-adm active
  Current active profile: latency-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio          3
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                     8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.1 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  130G  3.5G  127G   3% /mnt/ramdisk

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 21. /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge R6625
     Product Family: PowerEdge
     Serial:         BGP4016

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     24x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.3.11
    BIOS Date:         03/31/2023
    BIOS Revision:     1.3
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------
==============================================================================================================
Fortran, C      | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Base Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-return-type -Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc400-flags.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc400-flags.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-02 17:04:06-0400.
Report generated on 2023-06-13 15:15:09 by CPU2017 PS formatter v6716.
Originally published on 2023-06-13.