



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE8640 (Intel Xeon Platinum 8468)

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

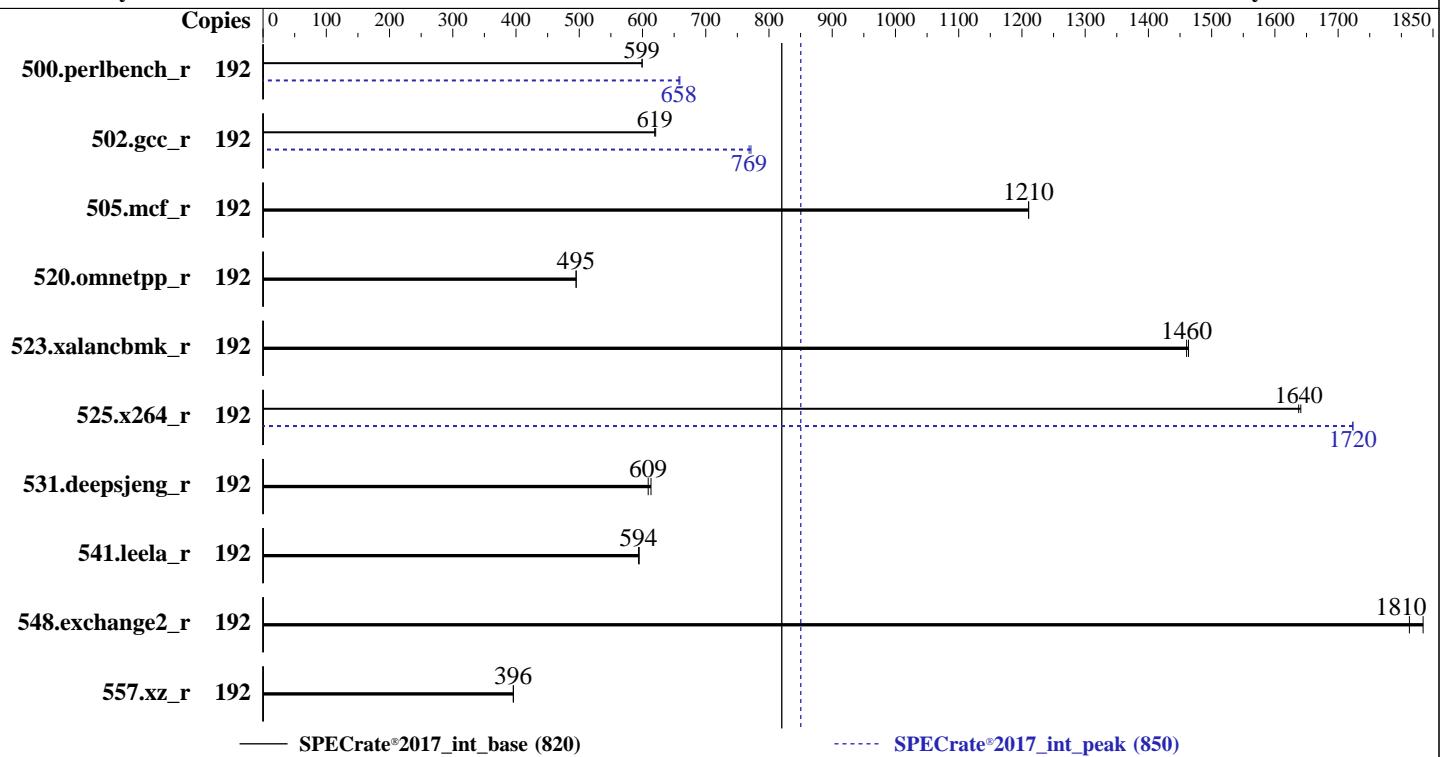

## Hardware

CPU Name: Intel Xeon Platinum 8468  
 Max MHz: 3800  
 Nominal: 2100  
 Enabled: 96 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 110 GB on tmpfs  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.19-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 1.0.0 released Mar-2023  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 820

SPECrate®2017\_int\_peak = 850

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	<b>510</b>	<b>599</b>	510	600			192	464	659	<b>465</b>	<b>658</b>				
502.gcc_r	192	438	621	<b>439</b>	<b>619</b>			192	352	772	<b>354</b>	<b>769</b>				
505.mcf_r	192	<b>256</b>	<b>1210</b>	256	1210			192	<b>256</b>	<b>1210</b>	256	1210				
520.omnetpp_r	192	<b>509</b>	<b>495</b>	509	495			192	<b>509</b>	<b>495</b>	509	495				
523.xalancbmk_r	192	<b>139</b>	<b>1460</b>	139	1460			192	<b>139</b>	<b>1460</b>	139	1460				
525.x264_r	192	<b>205</b>	<b>1640</b>	205	1640			192	195	1720	<b>195</b>	<b>1720</b>				
531.deepsjeng_r	192	<b>361</b>	<b>609</b>	359	613			192	<b>361</b>	<b>609</b>	359	613				
541.leela_r	192	<b>535</b>	<b>594</b>	535	595			192	<b>535</b>	<b>594</b>	535	595				
548.exchange2_r	192	<b>278</b>	<b>1810</b>	274	1830			192	<b>278</b>	<b>1810</b>	274	1830				
557.xz_r	192	<b>524</b>	<b>396</b>	524	396			192	<b>524</b>	<b>396</b>	524	396				

SPECrate®2017\_int\_base = 820

SPECrate®2017\_int\_peak = 850

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/ia32:/mnt/ram
  disk/cpu2017-1.1.9-ic2023.0/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017\_int\_base = 820

PowerEdge XE8640 (Intel Xeon Platinum 8468)

SPECCrate®2017\_int\_peak = 850

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 110 GB ramdisk created with the cmd: "mount -t tmpfs -o size=110G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
    DCU Streamer Prefetcher : Disabled
        Sub NUMA Cluster : 4-way Clustering
        LLC Prefetch : Disabled
    Dead Line LLC Alloc : Disabled
        Optimizer Mode : Enabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
        C1E : Disabled
        C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
    PCI ASPM L1 Link
        Power Management : Disabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue May 2 13:14:16 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017\_int\_base = 820

PowerEdge XE8640 (Intel Xeon Platinum 8468)

SPECCrate®2017\_int\_peak = 850

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----
-----
1. uname -a
Linux localhost 5.14.21-150400.19-default #1 SMP PREEMPT_DYNAMIC Wed Apr 20 08:32:52 UTC 2022 (d6fb753/lp)
x86_64 x86_64 x86_64 GNU/Linux
-----
2. w
13:14:16 up 5 min, 2 users, load average: 0.30, 0.28, 0.16
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root : : 13:09 ?xdm? 8:44 0.02s gdm-session-worker [pam/gdm-autologin]
root :0 :0 13:09 ?xdm? 8:44 0.02s /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4125943
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4125943
virtual memory            (kbytes, -v) unlimited
file locks                (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
/usr/lib/systemd/systemd --user
/usr/lib/gnome-terminal-server
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE8640 (Intel Xeon Platinum 8468)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 820

SPECrate®2017\_int\_peak = 850

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=4
--output_format csv,html,pdf,txt intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define
DL-BIOS-SNC=4 --output_format csv,html,pdf,txt --nopower --runmode rate --tune base:peak --size rerate
intrate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log
--lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

```
-----
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8468
    vendor_id       : GenuineIntel
    cpu family     : 6
    model          : 143
    stepping        : 8
    microcode       : 0x2b0001b0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 48
    siblings         : 96
    2 physical ids (chips)
    192 processors (hardware threads)
    physical id 0: core ids 0-47
    physical id 1: core ids 0-47
    physical id 0: apicids 0-95
    physical id 1: apicids 128-223
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu
```

```
From lscpu from util-linux 2.37.2:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 192
On-line CPU(s) list:    0-191
Vendor ID:               GenuineIntel
Model name:              Intel(R) Xeon(R) Platinum 8468
CPU family:              6
Model:                  143
Thread(s) per core:     2
Core(s) per socket:      48
Socket(s):              2
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 820

SPECrate®2017\_int\_peak = 850

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```

Stepping: 8
BogoMIPS: 4200.00
Flags:
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmpf tsc_known_freq pn1 pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xptr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfn1 vaes
vpclmulqdq avx512_vnni avx512_bitgal tme avx512_vpocntdq la57 rdpid
bus_lock_detect coldemote movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
L1d cache: 4.5 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 192 MiB (96 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s):
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,46,100,104,108,112,116,120,124,128,132,13
6,140
NUMA node1 CPU(s): 48,52,56,60,64,68,72,76,80,84,88,92,144,148,152,156,160,164,168,172,176,18
0,184,188
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,98,102,106,110,114,118,122,126,130,134,1
38,142
NUMA node3 CPU(s): 50,54,58,62,66,70,74,78,82,86,90,94,146,150,154,158,162,166,170,174,178,18
2,186,190
NUMA node4 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,97,101,105,109,113,117,121,125,129,133,13
7,141
NUMA node5 CPU(s): 49,53,57,61,65,69,73,77,81,85,89,93,145,149,153,157,161,165,169,173,177,18
1,185,189
NUMA node6 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,99,103,107,111,115,119,123,127,131,135,1
39,143
NUMA node7 CPU(s): 51,55,59,63,67,71,75,79,83,87,91,95,147,151,155,159,163,167,171,175,179,18
3,187,191
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation: Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation: usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation: Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K    4.5M   12 Data        1       64          1           64
  L1i     32K    3M     8 Instruction  1       64          1           64
  L2      2M    192M   16 Unified      2     2048          1           64
  L3     105M   210M   15 Unified      3    114688          1           64

```

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 8 nodes (0-7)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 820

PowerEdge XE8640 (Intel Xeon Platinum 8468)

SPECrate®2017\_int\_peak = 850

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,96,100,104,108,112,116,120,124,128,132,136,140
node 0 size: 128470 MB
node 0 free: 127692 MB
node 1 cpus: 48,52,56,60,64,68,72,76,80,84,88,92,144,148,152,156,160,164,168,172,176,180,184,188
node 1 size: 128983 MB
node 1 free: 128717 MB
node 2 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,98,102,106,110,114,118,122,126,130,134,138,142
node 2 size: 129017 MB
node 2 free: 128784 MB
node 3 cpus: 50,54,58,62,66,70,74,78,82,86,90,94,146,150,154,158,162,166,170,174,178,182,186,190
node 3 size: 129017 MB
node 3 free: 128287 MB
node 4 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,97,101,105,109,113,117,121,125,129,133,137,141
node 4 size: 129017 MB
node 4 free: 128781 MB
node 5 cpus: 49,53,57,61,65,69,73,77,81,85,89,93,145,149,153,157,161,165,169,173,177,181,185,189
node 5 size: 129017 MB
node 5 free: 119386 MB
node 6 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,99,103,107,111,115,119,123,127,131,135,139,143
node 6 size: 129017 MB
node 6 free: 128768 MB
node 7 cpus: 51,55,59,63,67,71,75,79,83,87,91,95,147,151,155,159,163,167,171,175,179,183,187,191
node 7 size: 128970 MB
node 7 free: 128504 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 12 12 12 21 21 21 21
 1: 12 10 12 12 21 21 21 21
 2: 12 12 10 12 21 21 21 21
 3: 12 12 12 10 21 21 21 21
 4: 21 21 21 21 10 12 12 12
 5: 21 21 21 21 12 10 12 12
 6: 21 21 21 21 12 12 10 12
 7: 21 21 21 21 12 12 12 10
```

```
9. /proc/meminfo
MemTotal: 1056270272 kB
```

```
10. who -r
run-level 5 May 2 13:09
```

```
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
graphical running
```

```
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor audited avahi-daemon bluetooth
                cron display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings
                klog libvирtd lvm2-monitor nscd nvmefc-boot-connections oracle postfix purge-kernels
                rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                wickedd-nanny wpa_supplicant xencommons
enabled-runtime systemd-remount-fs
disabled       NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
                apache2 apache2@ appstream-sync-cache autofs autoyast-initscripts avahi-dnsconfd bgpd
                blk-availability bluetooth-mesh boot-sysctl booth-arbitrator booth@ ca-certificates
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE8640 (Intel Xeon Platinum 8468)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 820

SPECrate®2017\_int\_peak = 850

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
chrony-wait chronyrd clamav-milter clamd cloud-config cloud-final cloud-init
cloud-init-local console-getty containerbuild-regionsrv corosync corosync-notifyd crm_mon
cryptctl-client cryptctl-server ctdb cups cups-browsed ddclient debug-shell dhcpcd dhcpcd6
dhcrelay dhcrelay6 dirsrv@ dlm dmraid-activation dnsmasq docker-img-store-setup
docker-img-store-setup-xfs drbd drbd-lvchange@ drbd-wait-promotable@ ebttables
exchange-bmc-os-info fetchmail freshclam google-guest-agent google-shutdown-scripts
google-startup-scripts gpm grub2-once guestregister haveged-switch-root hawk
hwloc-dump-hwdata ipmi ipmievip ipvsadm iscsi-init iscsid issue-add-ssh-keys
kdmp kdmp-early kexec-load ksm kvm_stat ldirectord libvirt-guests logd lunmask lvmlockd
lvmlocks man-db-create mariadb mariadb@ multipathd munge named nfs nfs-blkmap nfs-server
nfsserver nm-cloud-setup nmb ntp-wait ntpd nvmf-autoconnect openvpn@ ospf6d ospfd
ostree-remount pacemaker pppoe pppoe-server racoon racoon-setkey radvd rarpd@ rdisc ripd
ripngd rootgrow rpcbind rpmconfigcheck rsyncd rtkit-daemon salt-minion sapconf saprouter
saptune sbd sbd_remote serial-getty@ slurmctld slurmrd slurmdbd smartd_generate_opts smb
snmpd snmptrapd spamd spampd speech-dispatcherd squid srp_daemon srp_daemon_port@
strongswan strongswan-starter svnserve sysstat systemd-boot-check-no-failures
systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync
systemd-timesyncd tcasd tuned udisks2 upower virtinterfaced virtnetworkd virtnodedevd
virtnwfilterd virtproxyd virtqemud virtstoraged virtxend vsftpd waagent
winbind wpa_supplicant@ xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend
xen-watchdog xenconsoled xendomains xenstored xrdp xrdp-sesman ypbinder zebra
indirect pcscd saned@ uidd virtlockd virtlogd wickedd
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.19-default  
root=UUID=5dbfa664-5ba7-440a-b916-2ff8d67469f6  
splash=silent  
mitigations=auto  
quiet  
security=apparmor
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes
```

```
-----  
15. tuned-adm active  
  No current active profile.
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 820

PowerEdge XE8640 (Intel Xeon Platinum 8468)

SPECrate®2017\_int\_peak = 850

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```
vm.nr_overcommit_hugepages      0
vm.swappiness                  20
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
    defrag      always defer defer+madvise [madvise] never  
    enabled     [always] madvise never  
    hpage_pmd_size 2097152  
    shmem_enabled always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
    alloc_sleep_millisecs   60000  
    defrag                  1  
    max_ptes_none          511  
    max_ptes_shared         256  
    max_ptes_swap           64  
    pages_to_scan           4096  
    scan_sleep_millisecs   10000
```

```
-----  
19. OS release  
    From /etc/*-release /etc/*-version  
    os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----  
20. Disk information  
    SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0  
    Filesystem      Type   Size  Used Avail Use% Mounted on  
    tmpfs          tmpfs   110G  4.2G  106G  4% /mnt/ramdisk
```

```
-----  
21. /sys/devices/virtual/dmi/id  
    Vendor:        Dell Inc.  
    Product:       PowerEdge XE8640  
    Product Family: PowerEdge  
    Serial:        1234567
```

```
-----  
22. dmidecode  
    Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.  
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
    "DMTF SMBIOS" standard.  
    Memory:  
    10x 00CE00B300CE M321R8GA0BB0-CQKEG 64 GB 2 rank 4800  
    6x 00CE069D00CE M321R8GA0BB0-CQKVG 64 GB 2 rank 4800
```

```
-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
    BIOS Vendor:        Dell Inc.  
    BIOS Version:       1.0.0  
    BIOS Date:         03/23/2023  
    BIOS Revision:     1.0
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE8640 (Intel Xeon Platinum 8468)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 820

SPECrate®2017\_int\_peak = 850

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE8640 (Intel Xeon Platinum 8468)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 820

SPECrate®2017\_int\_peak = 850

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE8640 (Intel Xeon Platinum 8468)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 820

SPECrate®2017\_int\_peak = 850

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

502.gcc\_r: -m32  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32\_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

557.xz\_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE8640 (Intel Xeon Platinum 8468)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 820

SPECrate®2017\_int\_peak = 850

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.4.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-02 01:14:16-0400.

Report generated on 2024-01-29 17:47:00 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-06.