SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R860 (Intel Xeon Platinum 8460H)

SPECspeed®2017_int_base = 14.6

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

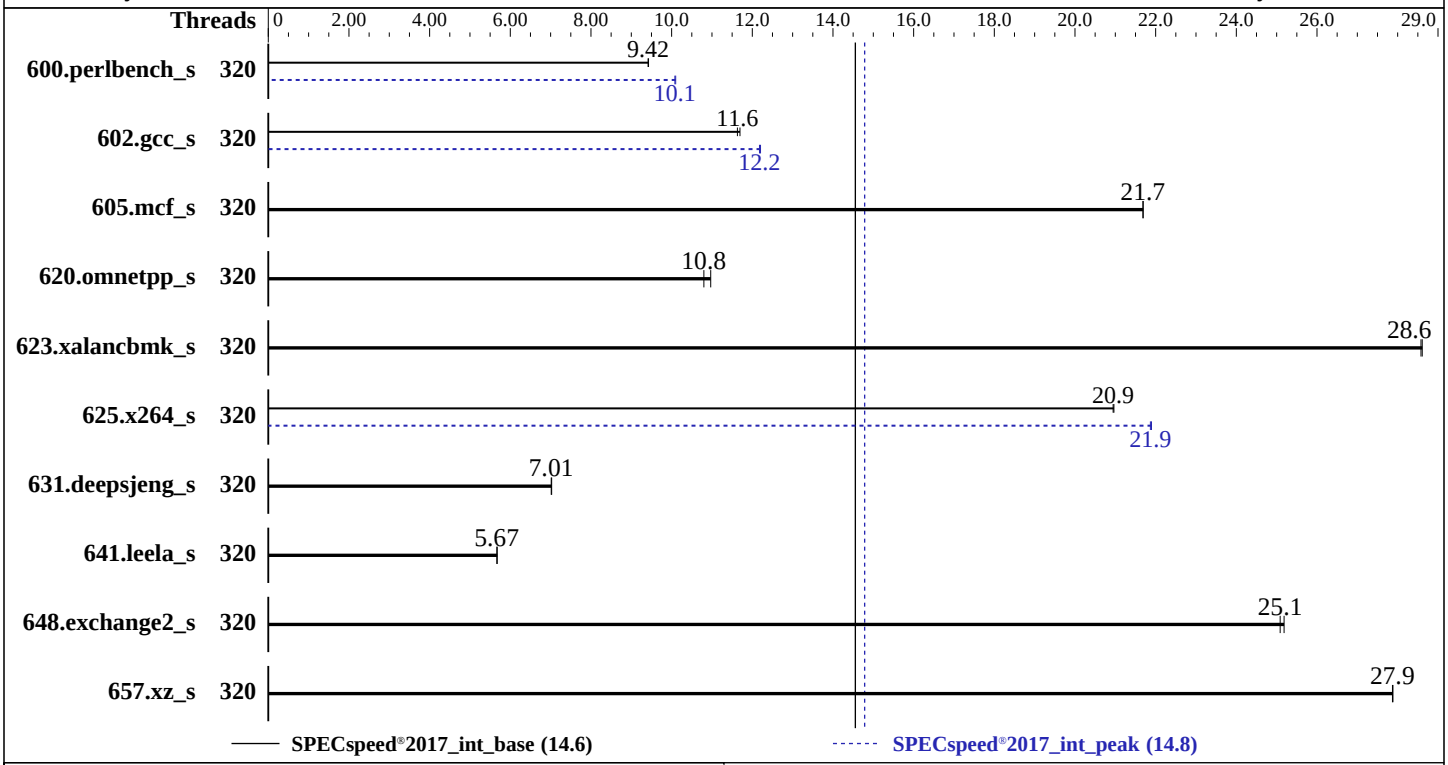

Hardware

CPU Name:	Intel Xeon Platinum 8460H
Max MHz:	3800
Nominal:	2200
Enabled:	160 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	160 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 1.4.0 released Mar-2023
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R860 (Intel Xeon Platinum 8460H)

SPECspeed®2017_int_base = 14.6

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	320	**189**	**9.42**	188	9.43			320	**176**	**10.1**	176	10.1		
602.gcc_s	320	**342**	**11.6**	341	11.7			320	326	12.2	**327**	**12.2**		
605.mcf_s	320	218	21.7	**218**	**21.7**			320	218	21.7	**218**	**21.7**		
620.omnetpp_s	320	149	11.0	**151**	**10.8**			320	149	11.0	**151**	**10.8**		
623.xalancbmk_s	320	49.5	28.6	**49.6**	**28.6**			320	49.5	28.6	**49.6**	**28.6**		
625.x264_s	320	**84.2**	**20.9**	84.1	21.0			320	80.6	21.9	**80.7**	**21.9**		
631.deepsjeng_s	320	**204**	**7.01**	204	7.03			320	**204**	**7.01**	204	7.03		
641.leela_s	320	**301**	**5.67**	301	5.68			320	**301**	**5.67**	301	5.68		
648.exchange2_s	320	117	25.2	**117**	**25.1**			320	117	25.2	**117**	**25.1**		
657.xz_s	320	**222**	**27.9**	222	27.9			320	**222**	**27.9**	222	27.9		

SPECspeed®2017_int_base = **14.6**

SPECspeed®2017_int_peak = **14.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
```

(Continued on next page)

General Notes (Continued)

```
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 160 GB ramdisk created with the cmd: "mount -t tmpfs -o size=160G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
                 ADDDC Setting : Disabled
        DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
              Sub NUMA Cluster : 4-way Clustering
                Optimizer Mode : Enabled

                System Profile : Custom
          CPU Power Management : Maximum Performance
                           C1E : Disabled
                       C States : Autonomous
           Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
            PCI ASPM L1 Link
              Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Mar 29 21:28:17 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
```

(Continued on next page)

Platform Notes (Continued)

```
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   21:28:17 up 19 min,  1 user,  load average: 0.39, 16.54, 23.39
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     :1        21:10   ?xdm?  21:59   0.00s /usr/libexec/gdm-x-session --register-session --run-script
  gnome-session

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 8254044
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 8254044
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 /usr/lib/systemd/systemd --user
 /usr/libexec/gnome-terminal-server
 bash
 /bin/bash ./DELL_speed.sh
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
   --define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
 /bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
   --define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=160 --tune base,peak -o all --define
```

(Continued on next page)

Platform Notes (Continued)

```
    intspeedaffinity --define smt-on --define drop_caches --iterations 2 --define
    DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=4 --output_format
    csv,html,pdf,txt intspeed
  runcpu --nobuild --action validate --define default-platform-flags --configfile
    ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=160 --tune base,peak --output_format all
    --define intspeedaffinity --define smt-on --define drop_caches --iterations 2 --define
    DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=4 --output_format
    csv,html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed intspeed --nopreenv
    --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0
    --from_runcpu 2
  specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0

------------------------------------------------------------
6. /proc/cpuinfo
     model name      : Intel(R) Xeon(R) Platinum 8460H
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 143
     stepping        : 8
     microcode       : 0x2b0001b0
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
     cpu cores       : 40
     siblings        : 80
     4 physical ids (chips)
     320 processors (hardware threads)
     physical id 0: core ids 0-39
     physical id 1: core ids 0-39
     physical id 2: core ids 0-39
     physical id 3: core ids 0-39
     physical id 0: apicids 0-79
     physical id 1: apicids 128-207
     physical id 2: apicids 256-335
     physical id 3: apicids 384-463
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          320
   On-line CPU(s) list:             0-319
   Vendor ID:                       GenuineIntel
   BIOS Vendor ID:                  Intel
   Model name:                      Intel(R) Xeon(R) Platinum 8460H
   BIOS Model name:                 Intel(R) Xeon(R) Platinum 8460H
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              2
   Core(s) per socket:              40
   Socket(s):                       4
   Stepping:                        8
   BogoMIPS:                        4400.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)

Platform Notes (Continued)

```
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  Virtualization:       VT-x
  L1d cache:            7.5 MiB (160 instances)
  L1i cache:            5 MiB (160 instances)
  L2 cache:             320 MiB (160 instances)
  L3 cache:             420 MiB (4 instances)
  NUMA node(s):         16
  NUMA node0 CPU(s):    0,8,16,24,32,40,48,56,64,72,160,168,176,184,192,200,208,216,224,232
  NUMA node1 CPU(s):    80,88,96,104,112,120,128,136,144,152,240,248,256,264,272,280,288,296,304,3
                        12
  NUMA node2 CPU(s):    4,12,20,28,36,44,52,60,68,76,164,172,180,188,196,204,212,220,228,236
  NUMA node3 CPU(s):    84,92,100,108,116,124,132,140,148,156,244,252,260,268,276,284,292,300,308,
                        316
  NUMA node4 CPU(s):    1,9,17,25,33,41,49,57,65,73,161,169,177,185,193,201,209,217,225,233
  NUMA node5 CPU(s):    81,89,97,105,113,121,129,137,145,153,241,249,257,265,273,281,289,297,305,3
                        13
  NUMA node6 CPU(s):    5,13,21,29,37,45,53,61,69,77,165,173,181,189,197,205,213,221,229,237
  NUMA node7 CPU(s):    85,93,101,109,117,125,133,141,149,157,245,253,261,269,277,285,293,301,309,
                        317
  NUMA node8 CPU(s):    2,10,18,26,34,42,50,58,66,74,162,170,178,186,194,202,210,218,226,234
  NUMA node9 CPU(s):    82,90,98,106,114,122,130,138,146,154,242,250,258,266,274,282,290,298,306,3
                        14
  NUMA node10 CPU(s):   6,14,22,30,38,46,54,62,70,78,166,174,182,190,198,206,214,222,230,238
  NUMA node11 CPU(s):   86,94,102,110,118,126,134,142,150,158,246,254,262,270,278,286,294,302,310,
                        318
  NUMA node12 CPU(s):   3,11,19,27,35,43,51,59,67,75,163,171,179,187,195,203,211,219,227,235
  NUMA node13 CPU(s):   83,91,99,107,115,123,131,139,147,155,243,251,259,267,275,283,291,299,307,3
                        15
  NUMA node14 CPU(s):   7,15,23,31,39,47,55,63,71,79,167,175,183,191,199,207,215,223,231,239
  NUMA node15 CPU(s):   87,95,103,111,119,127,135,143,151,159,247,255,263,271,279,287,295,303,311,
                        319
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     7.5M   12 Data            1     64        1             64
      L1i       32K       5M    8 Instruction     1     64        1             64
      L2         2M     320M   16 Unified         2   2048        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
      L3       105M     420M   15 Unified         3 114688        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0,8,16,24,32,40,48,56,64,72,160,168,176,184,192,200,208,216,224,232
  node 0 size: 128343 MB
  node 0 free: 122871 MB
  node 1 cpus: 80,88,96,104,112,120,128,136,144,152,240,248,256,264,272,280,288,296,304,312
  node 1 size: 129019 MB
  node 1 free: 128298 MB
  node 2 cpus: 4,12,20,28,36,44,52,60,68,76,164,172,180,188,196,204,212,220,228,236
  node 2 size: 129019 MB
  node 2 free: 128426 MB
  node 3 cpus: 84,92,100,108,116,124,132,140,148,156,244,252,260,268,276,284,292,300,308,316
  node 3 size: 129019 MB
  node 3 free: 128407 MB
  node 4 cpus: 1,9,17,25,33,41,49,57,65,73,161,169,177,185,193,201,209,217,225,233
  node 4 size: 129019 MB
  node 4 free: 128611 MB
  node 5 cpus: 81,89,97,105,113,121,129,137,145,153,241,249,257,265,273,281,289,297,305,313
  node 5 size: 129019 MB
  node 5 free: 128714 MB
  node 6 cpus: 5,13,21,29,37,45,53,61,69,77,165,173,181,189,197,205,213,221,229,237
  node 6 size: 129019 MB
  node 6 free: 122562 MB
  node 7 cpus: 85,93,101,109,117,125,133,141,149,157,245,253,261,269,277,285,293,301,309,317
  node 7 size: 129019 MB
  node 7 free: 128707 MB
  node 8 cpus: 2,10,18,26,34,42,50,58,66,74,162,170,178,186,194,202,210,218,226,234
  node 8 size: 129019 MB
  node 8 free: 128687 MB
  node 9 cpus: 82,90,98,106,114,122,130,138,146,154,242,250,258,266,274,282,290,298,306,314
  node 9 size: 129019 MB
  node 9 free: 128708 MB
  node 10 cpus: 6,14,22,30,38,46,54,62,70,78,166,174,182,190,198,206,214,222,230,238
  node 10 size: 128983 MB
  node 10 free: 128663 MB
  node 11 cpus: 86,94,102,110,118,126,134,142,150,158,246,254,262,270,278,286,294,302,310,318
  node 11 size: 129019 MB
  node 11 free: 128722 MB
  node 12 cpus: 3,11,19,27,35,43,51,59,67,75,163,171,179,187,195,203,211,219,227,235
  node 12 size: 129019 MB
  node 12 free: 128687 MB
  node 13 cpus: 83,91,99,107,115,123,131,139,147,155,243,251,259,267,275,283,291,299,307,315
  node 13 size: 129019 MB
  node 13 free: 128712 MB
  node 14 cpus: 7,15,23,31,39,47,55,63,71,79,167,175,183,191,199,207,215,223,231,239
  node 14 size: 129019 MB
  node 14 free: 128703 MB
  node 15 cpus: 87,95,103,111,119,127,135,143,151,159,247,255,263,271,279,287,295,303,311,319
  node 15 size: 128990 MB
  node 15 free: 128695 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
    0:  10  12  12  12  21  21  21  21  21  21  21  21  21  21  21  21
    1:  12  10  12  12  21  21  21  21  21  21  21  21  21  21  21  21
    2:  12  12  10  12  21  21  21  21  21  21  21  21  21  21  21  21
    3:  12  12  12  10  21  21  21  21  21  21  21  21  21  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
     4:  21  21  21  21  10  12  12  12  21  21  21  21  21  21  21  21
     5:  21  21  21  21  12  10  12  12  21  21  21  21  21  21  21  21
     6:  21  21  21  21  12  12  10  12  21  21  21  21  21  21  21  21
     7:  21  21  21  21  12  12  12  10  21  21  21  21  21  21  21  21
     8:  21  21  21  21  21  21  21  21  10  12  12  12  21  21  21  21
     9:  21  21  21  21  21  21  21  21  12  10  12  12  21  21  21  21
    10:  21  21  21  21  21  21  21  21  12  12  10  12  21  21  21  21
    11:  21  21  21  21  21  21  21  21  12  12  12  10  21  21  21  21
    12:  21  21  21  21  21  21  21  21  21  21  21  21  10  12  12  12
    13:  21  21  21  21  21  21  21  21  21  21  21  21  12  10  12  12
    14:  21  21  21  21  21  21  21  21  21  21  21  21  12  12  10  12
    15:  21  21  21  21  21  21  21  21  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2113098540 kB

------------------------------------------------------------
10. who -r
  run-level 5 Mar 29 21:09

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
                   getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors
                   low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                   nvmefc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon
                   qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd
                   sshd sssd switcheroo-control sysstat systemd-network-generator udisks2 upower vgauthd
                   virtqemud vmtoolsd
  enabled-runtime  systemd-remount-fs
  disabled         arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
                   dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe firewalld grafana-server gssproxy
                   httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuio kpatch kvm_stat ledmon
                   libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap
                   nfs-server nftables nmb numad nvmf-autoconnect pmfind pmie_farm pmlogger_farm pmproxy
                   podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon
                   rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd
                   snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
                   systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target
                   targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodedevd virtnwfilterd
                   virtproxyd virtsecretd virtstoraged vsftpd wpa_supplicant
  indirect         pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                   virtlockd virtlogd vsftpd@

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
```

(Continued on next page)

Platform Notes (Continued)

```
  rd.lvm.lv=rhel/swap
  rhgb
  quiet

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
19. Disk information
```

(Continued on next page)

Platform Notes (Continued)

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  160G  4.2G  156G   3% /mnt/ramdisk

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R860
    Product Family: PowerEdge
    Serial:         1234567

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    18x 00AD00B300AD HMCG94MEBRA123N 64 GB 2 rank 4800
    14x 00AD063200AD HMCG94MEBRA109N 64 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.4.0
   BIOS Date:         03/15/2023
   BIOS Revision:     1.4
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

C++ benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

620.omnetpp_s: `basepeak = yes`

623.xalancbmk_s: `basepeak = yes`

631.deepsjeng_s: `basepeak = yes`

641.leela_s: `basepeak = yes`

Fortran benchmarks:

648.exchange2_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-29 21:28:16-0400.
Report generated on 2024-01-29 17:45:52 by CPU2017 PS formatter v6716.
Originally published on 2023-05-23.