SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R960 (Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 1340

SPECrate®2017_fp_peak = 1390

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

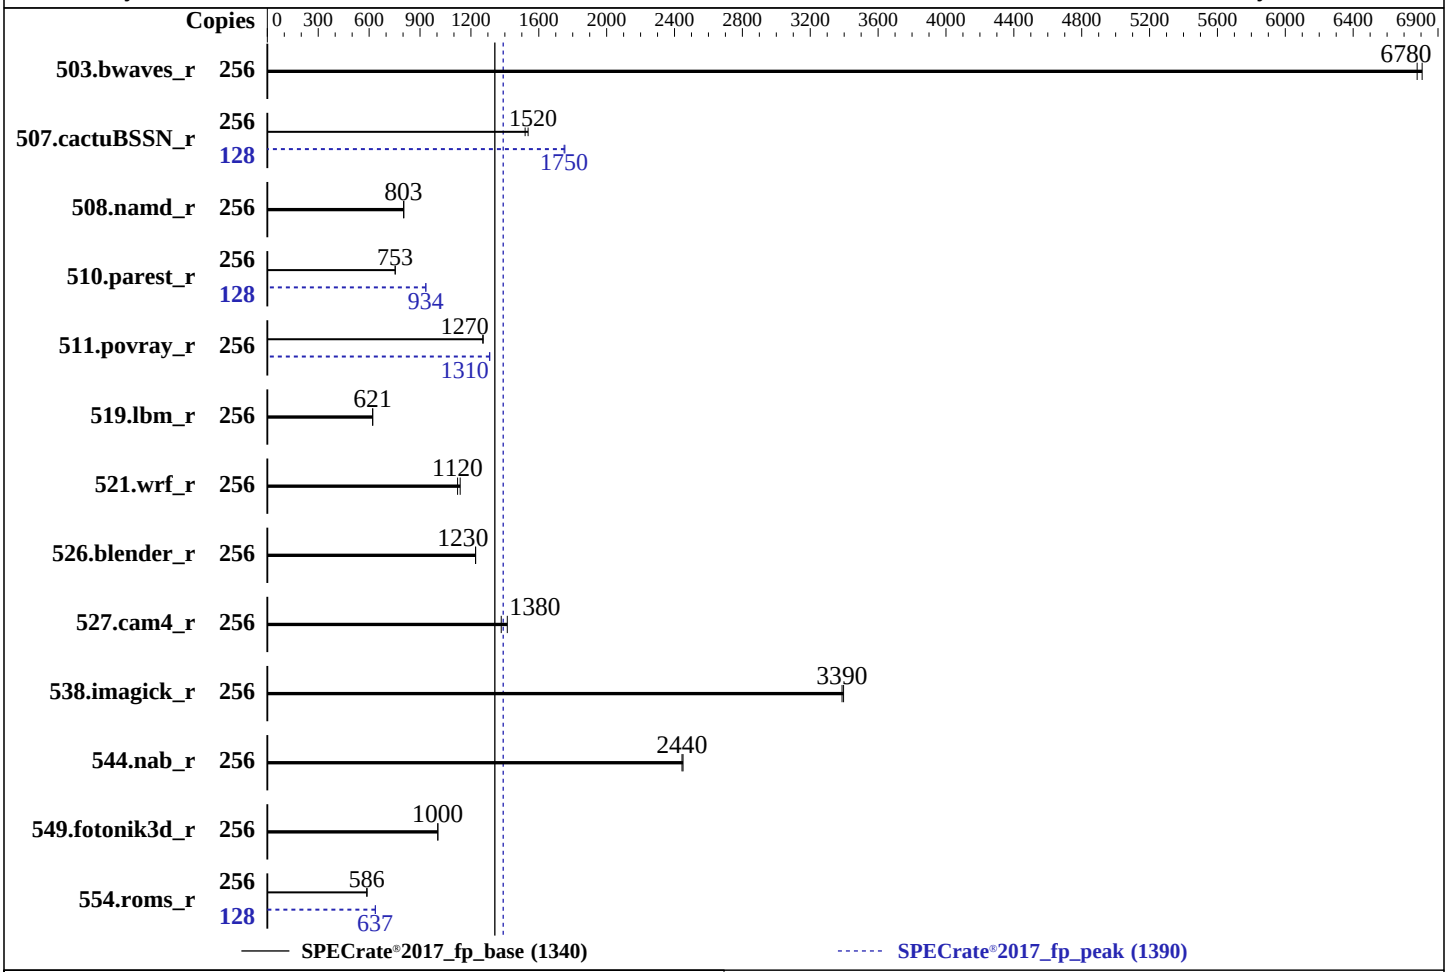

Hardware

CPU Name:	Intel Xeon Platinum 8454H
Max MHz:	3400
Nominal:	2100
Enabled:	128 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	82.5 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	140 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.4.0 released Mar-2023
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R960 (Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 1340

SPECrate®2017_fp_peak = 1390

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	**379**	**6780**	377	6810			256	**379**	**6780**	377	6810		
507.cactuBSSN_r	256	**213**	**1520**	211	1540			128	92.4	1750	**92.6**	**1750**		
508.namd_r	256	**303**	**803**	302	805			256	**303**	**803**	302	805		
510.parest_r	256	888	754	**889**	**753**			128	**359**	**934**	358	934		
511.povray_r	256	**471**	**1270**	470	1270			256	**457**	**1310**	456	1310		
519.lbm_r	256	**435**	**621**	434	621			256	**435**	**621**	434	621		
521.wrf_r	256	**511**	**1120**	504	1140			256	**511**	**1120**	504	1140		
526.blender_r	256	**318**	**1230**	317	1230			256	**318**	**1230**	317	1230		
527.cam4_r	256	317	1410	**325**	**1380**			256	317	1410	**325**	**1380**		
538.imagick_r	256	**188**	**3390**	187	3400			256	**188**	**3390**	187	3400		
544.nab_r	256	176	2450	**176**	**2440**			256	176	2450	**176**	**2440**		
549.fotonik3d_r	256	**993**	**1000**	992	1010			256	**993**	**1000**	992	1010		
554.roms_r	256	**695**	**586**	692	588			128	**320**	**637**	319	637		

SPECrate®2017_fp_base = 1340

SPECrate®2017_fp_peak = 1390

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
      "/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
```

(Continued on next page)

General Notes (Continued)

```
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 140 GB ramdisk created with the cmd: "mount -t tmpfs -o size=140G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
                 ADDDC Setting : Disabled
         DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
       DCU Streamer Prefetcher : Disabled
              Sub NUMA Cluster : 4-way Clustering
                  LLC Prefetch : Disabled
            Dead Line LLC Alloc : Disabled
                 Optimizer Mode : Enabled

                 System Profile : Custom
          CPU Power Management : Maximum Performance
                           C1E : Disabled
                      C States : Autonomous
           Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
            PCI ASPM L1 Link
               Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Mar 31 01:22:21 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
```

(Continued on next page)

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   01:22:21 up  4:28,  1 user,  load average: 138.55, 225.73, 243.76
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     :1        20:54   ?xdm?  29:55   0.00s /usr/libexec/gdm-x-session --register-session --run-script
  gnome-session

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 8252085
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 8252085
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 /usr/lib/systemd/systemd --user
 /usr/libexec/gnome-terminal-server
 bash
 /bin/bash ./DELL_rate.sh
 /bin/bash ./dell-run-main.sh rate
 /bin/bash ./dell-run-main.sh rate
 /bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
   --define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
 /bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
   --define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=128 --define physicalfirst
```

(Continued on next page)

Platform Notes (Continued)

```
    --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
    DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=4 --output_format
    csv,html,pdf,txt fprate
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
    ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=128 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
    --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=4 --output_format
    csv,html,pdf,txt --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv
    --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0

------------------------------------------------------------
6. /proc/cpuinfo
     model name      : Intel(R) Xeon(R) Platinum 8454H
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 143
     stepping        : 8
     microcode       : 0x2b0001b0
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
     cpu cores       : 32
     siblings        : 64
     4 physical ids (chips)
     256 processors (hardware threads)
     physical id 0: core ids 0-31
     physical id 1: core ids 0-31
     physical id 2: core ids 0-31
     physical id 3: core ids 0-31
     physical id 0: apicids 0-63
     physical id 1: apicids 128-191
     physical id 2: apicids 256-319
     physical id 3: apicids 384-447
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          256
   On-line CPU(s) list:             0-255
   Vendor ID:                       GenuineIntel
   BIOS Vendor ID:                  Intel
   Model name:                      Intel(R) Xeon(R) Platinum 8454H
   BIOS Model name:                 Intel(R) Xeon(R) Platinum 8454H
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              2
   Core(s) per socket:              32
   Socket(s):                       4
   Stepping:                        8
   BogoMIPS:                        4200.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
```

(Continued on next page)

Platform Notes (Continued)

```
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  Virtualization:       VT-x
  L1d cache:            6 MiB (128 instances)
  L1i cache:            4 MiB (128 instances)
  L2 cache:             256 MiB (128 instances)
  L3 cache:             330 MiB (4 instances)
  NUMA node(s):         16
  NUMA node0 CPU(s):    0,8,16,24,32,40,48,56,128,136,144,152,160,168,176,184
  NUMA node1 CPU(s):    64,72,80,88,96,104,112,120,192,200,208,216,224,232,240,248
  NUMA node2 CPU(s):    4,12,20,28,36,44,52,60,132,140,148,156,164,172,180,188
  NUMA node3 CPU(s):    68,76,84,92,100,108,116,124,196,204,212,220,228,236,244,252
  NUMA node4 CPU(s):    1,9,17,25,33,41,49,57,129,137,145,153,161,169,177,185
  NUMA node5 CPU(s):    65,73,81,89,97,105,113,121,193,201,209,217,225,233,241,249
  NUMA node6 CPU(s):    5,13,21,29,37,45,53,61,133,141,149,157,165,173,181,189
  NUMA node7 CPU(s):    69,77,85,93,101,109,117,125,197,205,213,221,229,237,245,253
  NUMA node8 CPU(s):    2,10,18,26,34,42,50,58,130,138,146,154,162,170,178,186
  NUMA node9 CPU(s):    66,74,82,90,98,106,114,122,194,202,210,218,226,234,242,250
  NUMA node10 CPU(s):   6,14,22,30,38,46,54,62,134,142,150,158,166,174,182,190
  NUMA node11 CPU(s):   70,78,86,94,102,110,118,126,198,206,214,222,230,238,246,254
  NUMA node12 CPU(s):   3,11,19,27,35,43,51,59,131,139,147,155,163,171,179,187
  NUMA node13 CPU(s):   67,75,83,91,99,107,115,123,195,203,211,219,227,235,243,251
  NUMA node14 CPU(s):   7,15,23,31,39,47,55,63,135,143,151,159,167,175,183,191
  NUMA node15 CPU(s):   71,79,87,95,103,111,119,127,199,207,215,223,231,239,247,255
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1    64        1             64
     L1i       32K       4M    8 Instruction     1    64        1             64
     L2         2M     256M   16 Unified         2  2048        1             64
     L3      82.5M     330M   15 Unified         3 90112        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0,8,16,24,32,40,48,56,128,136,144,152,160,168,176,184
  node 0 size: 127832 MB
  node 0 free: 126136 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 1 cpus: 64,72,80,88,96,104,112,120,192,200,208,216,224,232,240,248
node 1 size: 129020 MB
node 1 free: 128278 MB
node 2 cpus: 4,12,20,28,36,44,52,60,132,140,148,156,164,172,180,188
node 2 size: 129020 MB
node 2 free: 128244 MB
node 3 cpus: 68,76,84,92,100,108,116,124,196,204,212,220,228,236,244,252
node 3 size: 129020 MB
node 3 free: 128306 MB
node 4 cpus: 1,9,17,25,33,41,49,57,129,137,145,153,161,169,177,185
node 4 size: 128984 MB
node 4 free: 128186 MB
node 5 cpus: 65,73,81,89,97,105,113,121,193,201,209,217,225,233,241,249
node 5 size: 129020 MB
node 5 free: 127923 MB
node 6 cpus: 5,13,21,29,37,45,53,61,133,141,149,157,165,173,181,189
node 6 size: 129020 MB
node 6 free: 128296 MB
node 7 cpus: 69,77,85,93,101,109,117,125,197,205,213,221,229,237,245,253
node 7 size: 129020 MB
node 7 free: 128286 MB
node 8 cpus: 2,10,18,26,34,42,50,58,130,138,146,154,162,170,178,186
node 8 size: 129020 MB
node 8 free: 119478 MB
node 9 cpus: 66,74,82,90,98,106,114,122,194,202,210,218,226,234,242,250
node 9 size: 129020 MB
node 9 free: 128279 MB
node 10 cpus: 6,14,22,30,38,46,54,62,134,142,150,158,166,174,182,190
node 10 size: 129020 MB
node 10 free: 128161 MB
node 11 cpus: 70,78,86,94,102,110,118,126,198,206,214,222,230,238,246,254
node 11 size: 129020 MB
node 11 free: 128229 MB
node 12 cpus: 3,11,19,27,35,43,51,59,131,139,147,155,163,171,179,187
node 12 size: 129020 MB
node 12 free: 128302 MB
node 13 cpus: 67,75,83,91,99,107,115,123,195,203,211,219,227,235,243,251
node 13 size: 129020 MB
node 13 free: 128307 MB
node 14 cpus: 7,15,23,31,39,47,55,63,135,143,151,159,167,175,183,191
node 14 size: 129020 MB
node 14 free: 128314 MB
node 15 cpus: 71,79,87,95,103,111,119,127,199,207,215,223,231,239,247,255
node 15 size: 129000 MB
node 15 free: 128286 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  12  12  12  21  21  21  21  21  21  21  21  21  21  21  21
  1:  12  10  12  12  21  21  21  21  21  21  21  21  21  21  21  21
  2:  12  12  10  12  21  21  21  21  21  21  21  21  21  21  21  21
  3:  12  12  12  10  21  21  21  21  21  21  21  21  21  21  21  21
  4:  21  21  21  21  10  12  12  12  21  21  21  21  21  21  21  21
  5:  21  21  21  21  12  10  12  12  21  21  21  21  21  21  21  21
  6:  21  21  21  21  12  12  10  12  21  21  21  21  21  21  21  21
  7:  21  21  21  21  12  12  12  10  21  21  21  21  21  21  21  21
  8:  21  21  21  21  21  21  21  21  10  12  12  12  21  21  21  21
  9:  21  21  21  21  21  21  21  21  12  10  12  12  21  21  21  21
 10:  21  21  21  21  21  21  21  21  12  12  10  12  21  21  21  21
 11:  21  21  21  21  21  21  21  21  12  12  12  10  21  21  21  21
 12:  21  21  21  21  21  21  21  21  21  21  21  21  10  12  12  12
```

(Continued on next page)

Platform Notes (Continued)

```
   13:  21  21  21  21  21  21  21  21  21  21  21  21  12  10  12  12
   14:  21  21  21  21  21  21  21  21  21  21  21  21  12  12  10  12
   15:  21  21  21  21  21  21  21  21  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2112597072 kB

------------------------------------------------------------
10. who -r
  run-level 5 Mar 30 20:54

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                  LOAD   ACTIVE SUB    DESCRIPTION
  * dnf-makecache.service loaded failed failed dnf makecache

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
                   getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors
                   low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                   nvmefc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon
                   qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd
                   sshd sssd switcheroo-control sysstat systemd-network-generator udisks2 upower vgauthd
                   virtqemud vmtoolsd
  enabled-runtime  systemd-remount-fs
  disabled         arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
                   dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe firewalld grafana-server gssproxy
                   httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuio kpatch kvm_stat ledmon
                   libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap
                   nfs-server nftables nmb numad nvmf-autoconnect pmfind pmie_farm pmlogger_farm pmproxy
                   podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon
                   rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd
                   snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
                   systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target
                   targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodedevd virtnwfilterd
                   virtproxyd virtsecretd virtstoraged vsftpd wpa_supplicant
  indirect         pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                   virtlockd virtlogd vsftpd@

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  140G  4.2G  136G   3% /mnt/ramdisk
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge R960
     Product Family: PowerEdge

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     15x 00AD00B300AD HMCG94MEBRA121N 64 GB 2 rank 4800
     17x 00AD063200AD HMCG94MEBRA109N 64 GB 2 rank 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.4.0
    BIOS Date:         03/15/2023
    BIOS Revision:     1.4
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:
```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
`-nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-31 01:22:21-0400.
Report generated on 2023-09-13 18:56:17 by CPU2017 PS formatter v6716.
Originally published on 2023-05-23.