SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R860 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_base = 318

SPECspeed®2017_fp_peak = 318

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

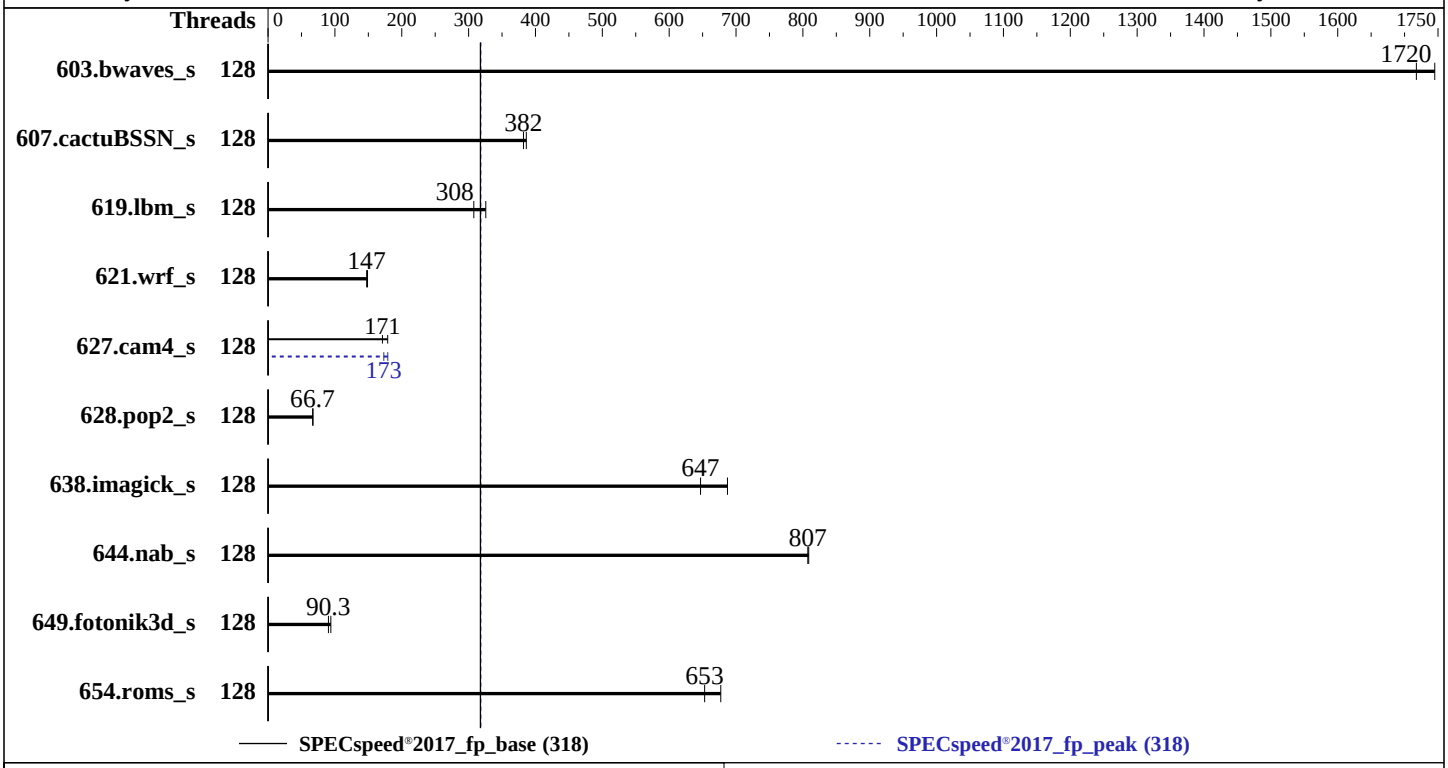

Hardware

CPU Name:	Intel Xeon Platinum 8454H
Max MHz:	3400
Nominal:	2100
Enabled:	128 cores, 4 chips
Orderable:	2,4 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	82.5 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	80 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 1.4.0 released Mar-2023
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	33.8	1750	**34.3**	**1720**			128	33.8	1750	**34.3**	**1720**		
607.cactuBSSN_s	128	43.2	386	**43.6**	**382**			128	43.2	386	**43.6**	**382**		
619.lbm_s	128	**17.0**	**308**	16.1	326			128	**17.0**	**308**	16.1	326		
621.wrf_s	128	**89.7**	**147**	88.9	149			128	**89.7**	**147**	88.9	149		
627.cam4_s	128	**51.8**	**171**	49.5	179			128	49.5	179	**51.2**	**173**		
628.pop2_s	128	176	67.3	**178**	**66.7**			128	176	67.3	**178**	**66.7**		
638.imagick_s	128	**22.3**	**647**	21.0	687			128	**22.3**	**647**	21.0	687		
644.nab_s	128	21.6	809	**21.6**	**807**			128	21.6	809	**21.6**	**807**		
649.fotonik3d_s	128	**101**	**90.3**	97.1	93.9			128	**101**	**90.3**	97.1	93.9		
654.roms_s	128	23.3	677	**24.1**	**653**			128	23.3	677	**24.1**	**653**		

SPECspeed®2017_fp_base = **318**

SPECspeed®2017_fp_peak = **318**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
                  ADDDC Setting : Disabled
         DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
              Logical Processor : Disabled
               Sub NUMA Cluster : 2-way Clustering
                 Optimizer Mode : Enabled

                 System Profile : Custom
           CPU Power Management : Maximum Performance
                           C1E : Disabled
                       C States : Autonomous
            Memory Patrol Scrub : Disabled
       Energy Efficiency Policy : Performance
             PCI ASPM L1 Link
               Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Mar 31 00:46:29 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   00:46:29 up  2:49,  1 user,  load average: 5.64, 5.91, 3.52
```

(Continued on next page)

Platform Notes (Continued)

```
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     :1        22:01   ?xdm?   7:12   0.00s /usr/libexec/gdm-x-session --register-session --run-script
  gnome-session

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 8254281
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 8254281
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 /usr/lib/systemd/systemd --user
 /usr/libexec/gnome-terminal-server
 bash
 /bin/bash ./DELL_speed.sh
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
   --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=2 --output_format csv,html,pdf,txt
 /bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
   --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=2 --output_format csv,html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=128 --tune base,peak -o all --define
   drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1 --define
   DL-BIOS-adddcD=1 --define DL-BIOS-SNC=2 --output_format csv,html,pdf,txt fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=128 --tune base,peak --output_format all
   --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
   --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=2 --output_format csv,html,pdf,txt --nopower --runmode
   speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8454H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
```

(Continued on next page)

Platform Notes (Continued)

```
     stepping        : 8
     microcode       : 0x2b0001b0
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
     cpu cores       : 32
     siblings        : 32
     4 physical ids (chips)
     128 processors (hardware threads)
     physical id 0: core ids 0-31
     physical id 1: core ids 0-31
     physical id 2: core ids 0-31
     physical id 3: core ids 0-31
     physical id 0: apicids
     0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
     physical id 1: apicids
     128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
     80,182,184,186,188,190
     physical id 2: apicids
     256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
     08,310,312,314,316,318
     physical id 3: apicids
     384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
     36,438,440,442,444,446
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          128
   On-line CPU(s) list:             0-127
   Vendor ID:                       GenuineIntel
   BIOS Vendor ID:                  Intel
   Model name:                      Intel(R) Xeon(R) Platinum 8454H
   BIOS Model name:                 Intel(R) Xeon(R) Platinum 8454H
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              1
   Core(s) per socket:              32
   Socket(s):                       4
   Stepping:                        8
   BogoMIPS:                        4200.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                    invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                    vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                                    erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                    clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                    split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                    avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
```

(Continued on next page)

Platform Notes (Continued)

```
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  Virtualization:       VT-x
  L1d cache:            6 MiB (128 instances)
  L1i cache:            4 MiB (128 instances)
  L2 cache:             256 MiB (128 instances)
  L3 cache:             330 MiB (4 instances)
  NUMA node(s):         8
  NUMA node0 CPU(s):    0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120
  NUMA node1 CPU(s):    4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124
  NUMA node2 CPU(s):    1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121
  NUMA node3 CPU(s):    5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125
  NUMA node4 CPU(s):    2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122
  NUMA node5 CPU(s):    6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126
  NUMA node6 CPU(s):    3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123
  NUMA node7 CPU(s):    7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1    64        1             64
     L1i       32K       4M    8 Instruction     1    64        1             64
     L2         2M     256M   16 Unified         2  2048        1             64
     L3      82.5M     330M   15 Unified         3 90112        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120
  node 0 size: 257368 MB
  node 0 free: 256479 MB
  node 1 cpus: 4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124
  node 1 size: 258007 MB
  node 1 free: 252190 MB
  node 2 cpus: 1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121
  node 2 size: 258044 MB
  node 2 free: 257327 MB
  node 3 cpus: 5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125
  node 3 size: 258044 MB
  node 3 free: 251351 MB
  node 4 cpus: 2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122
  node 4 size: 258044 MB
  node 4 free: 257790 MB
  node 5 cpus: 6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126
  node 5 size: 258044 MB
  node 5 free: 257833 MB
  node 6 cpus: 3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123
  node 6 size: 258044 MB
  node 6 free: 257755 MB
  node 7 cpus: 7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127
```

(Continued on next page)

Platform Notes (Continued)

```
  node 7 size: 258033 MB
  node 7 free: 257801 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  21  21  21  21  21  21
    1:  12  10  21  21  21  21  21  21
    2:  21  21  10  12  21  21  21  21
    3:  21  21  12  10  21  21  21  21
    4:  21  21  21  21  10  12  21  21
    5:  21  21  21  21  12  10  21  21
    6:  21  21  21  21  21  21  10  12
    7:  21  21  21  21  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2113159136 kB

------------------------------------------------------------
10. who -r
  run-level 5 Mar 30 21:57

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                  LOAD   ACTIVE SUB    DESCRIPTION
  * dnf-makecache.service loaded failed failed dnf makecache

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
                   getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors
                   low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                   nvmefc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon
                   qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd
                   sshd sssd switcheroo-control sysstat systemd-network-generator udisks2 upower vgauthd
                   virtqemud vmtoolsd
  enabled-runtime  systemd-remount-fs
  disabled         arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
                   dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe firewalld grafana-server gssproxy
                   httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuio kpatch kvm_stat ledmon
                   libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap
                   nfs-server nftables nmb numad nvmf-autoconnect pmfind pmie_farm pmlogger_farm pmproxy
                   podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon
                   rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd
                   snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
                   systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target
                   targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodedevd virtnwfilterd
                   virtproxyd virtsecretd virtstoraged vsftpd wpa_supplicant
  indirect         pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                   virtlockd virtlogd vsftpd@

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
```

(Continued on next page)

Platform Notes (Continued)

```
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
```

(Continued on next page)

Platform Notes (Continued)

```
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs   80G  4.2G   76G   6% /mnt/ramdisk

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R860
    Product Family: PowerEdge
    Serial:         1234567

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    18x 00AD00B300AD HMCG94MEBRA123N 64 GB 2 rank 4800
    14x 00AD063200AD HMCG94MEBRA109N 64 GB 2 rank 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.4.0
   BIOS Date:         03/15/2023
   BIOS Revision:     1.4
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml`

`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-31 00:46:28-0400.
Report generated on 2023-09-13 20:11:46 by CPU2017 PS formatter v6716.
Originally published on 2023-05-23.