SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd. (IEI)

NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 1010

SPECrate®2017_fp_peak = 1080

CPU2017 License: 3358
Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)
Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

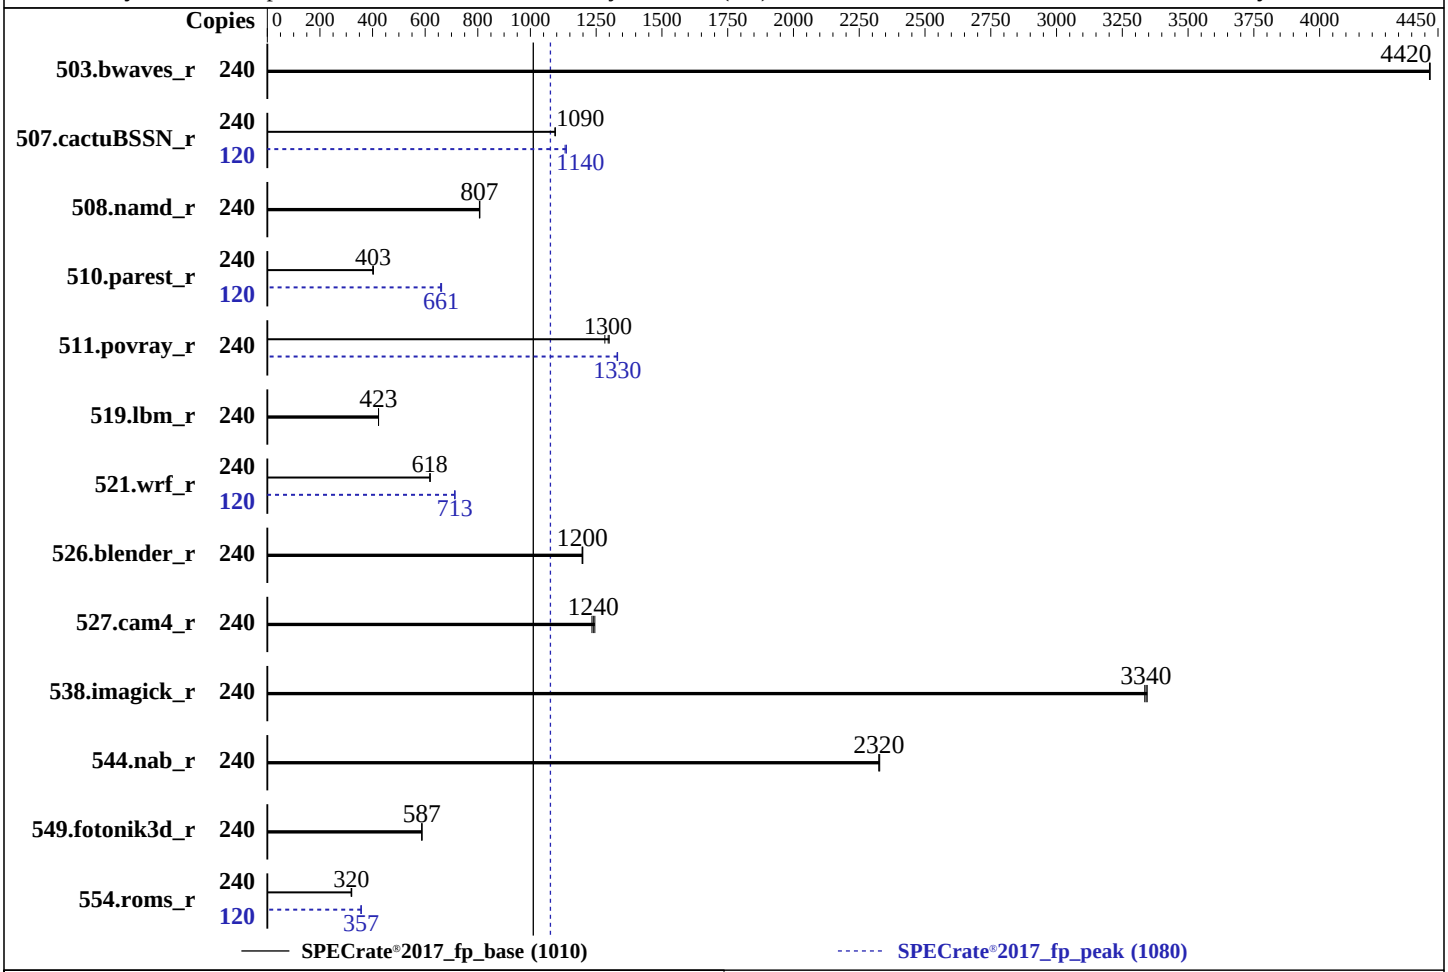

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	120 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 1 TB NVME SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) 5.14.0-70.22.1.el9_0.x86_64
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 03.01.00 released Dec-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd. (IEI)

NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 1010

SPECrate®2017_fp_peak = 1080

CPU2017 License: 3358
Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)
Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	240	545	4420	545	4420	**545**	**4420**	240	545	4420	545	4420	**545**	**4420**
507.cactuBSSN_r	240	278	1090	**278**	**1090**	278	1090	120	134	1130	134	1140	**134**	**1140**
508.namd_r	240	283	806	**283**	**807**	282	808	240	283	806	**283**	**807**	282	808
510.parest_r	240	**1559**	**403**	1566	401	1557	403	120	**475**	**661**	476	659	474	662
511.povray_r	240	**433**	**1300**	431	1300	437	1280	240	**421**	**1330**	421	1330	422	1330
519.lbm_r	240	**598**	**423**	598	423	598	423	240	**598**	**423**	598	423	598	423
521.wrf_r	240	868	619	**869**	**618**	870	618	120	377	713	378	712	**377**	**713**
526.blender_r	240	**305**	**1200**	305	1200	305	1200	240	**305**	**1200**	305	1200	305	1200
527.cam4_r	240	337	1240	340	1230	**339**	**1240**	240	337	1240	340	1230	**339**	**1240**
538.imagick_r	240	178	3340	**179**	**3340**	179	3340	240	178	3340	**179**	**3340**	179	3340
544.nab_r	240	174	2330	174	2320	**174**	**2320**	240	174	2330	174	2320	**174**	**2320**
549.fotonik3d_r	240	**1592**	**587**	1593	587	1591	588	240	**1592**	**587**	1593	587	1591	588
554.roms_r	240	1197	319	1188	321	**1192**	**320**	120	536	356	534	357	**534**	**357**

SPECrate®2017_fp_base = 1010

SPECrate®2017_fp_peak = 1080

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to SNC4

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Apr  7 03:50:42 2022

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
```

(Continued on next page)

Platform Notes (Continued)

```
   03:50:42 up  7:50,  2 users,  load average: 174.83, 223.81, 232.36
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1      20:00    6:33m  0.94s  0.01s sh
  reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh
  root     tty2      20:00    7:50m  0.00s  0.00s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 2062060
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 2062060
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 sh reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 -c
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=120 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 --configfile
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=120 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.011/templogs/preenv.fprate.011.0.log --lognum 011.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 6
    microcode       : 0x2b000130
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 60
    siblings        : 120
    2 physical ids (chips)
    240 processors (hardware threads)
```

(Continued on next page)

Platform Notes (Continued)

```
    physical id 0: core ids 0-59
    physical id 1: core ids 0-59
    physical id 0: apicids 0-119
    physical id 1: apicids 128-247
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          240
  On-line CPU(s) list:             0-239
  Vendor ID:                       GenuineIntel
  BIOS Vendor ID:                  Intel(R) Corporation
  Model name:                      Intel(R) Xeon(R) Platinum 8490H
  BIOS Model name:                 Intel(R) Xeon(R) Platinum 8490H
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              2
  Core(s) per socket:              60
  Socket(s):                       2
  Stepping:                        6
  CPU max MHz:                     3500.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        3800.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                   x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                   abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                   intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                                   tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                   rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                                   avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                   cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                                   wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                                   avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                   avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                   cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                   arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  L1d cache:                       5.6 MiB (120 instances)
  L1i cache:                       3.8 MiB (120 instances)
  L2 cache:                        240 MiB (120 instances)
  L3 cache:                        225 MiB (2 instances)
  NUMA node(s):                    8
  NUMA node0 CPU(s):               0-14,120-134
  NUMA node1 CPU(s):               15-29,135-149
  NUMA node2 CPU(s):               30-44,150-164
  NUMA node3 CPU(s):               45-59,165-179
  NUMA node4 CPU(s):               60-74,180-194
  NUMA node5 CPU(s):               75-89,195-209
  NUMA node6 CPU(s):               90-104,210-224
  NUMA node7 CPU(s):               105-119,225-239
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     5.6M   12 Data            1     64        1             64
     L1i       32K     3.8M    8 Instruction     1     64        1             64
     L2         2M     240M   16 Unified         2   2048        1             64
     L3     112.5M     225M   15 Unified         3 122880        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-14,120-134
  node 0 size: 64072 MB
  node 0 free: 49557 MB
  node 1 cpus: 15-29,135-149
  node 1 size: 64469 MB
  node 1 free: 52353 MB
  node 2 cpus: 30-44,150-164
  node 2 size: 64505 MB
  node 2 free: 52374 MB
  node 3 cpus: 45-59,165-179
  node 3 size: 64505 MB
  node 3 free: 52378 MB
  node 4 cpus: 60-74,180-194
  node 4 size: 64505 MB
  node 4 free: 52011 MB
  node 5 cpus: 75-89,195-209
  node 5 size: 64505 MB
  node 5 free: 52375 MB
  node 6 cpus: 90-104,210-224
  node 6 size: 64505 MB
  node 6 free: 52371 MB
  node 7 cpus: 105-119,225-239
  node 7 size: 64485 MB
  node 7 free: 52329 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
    5:  21  21  21  21  12  10  12  12
    6:  21  21  21  21  12  12  10  12
    7:  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       527928412 kB
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
10. who -r
  run-level 3 Apr 6 20:00

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                   dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                   nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd
                   systemd-network-generator udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell kvm_stat
                   man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@
                   sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.50 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/CPU2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   819G  173G  646G  22% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         IEI
    Product:        NF5280M7
    Product Family: Not specified
    Serial:         000000000

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Version:      03.01.00
    BIOS Date:         12/29/2022
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

521.wrf_r: `-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1) `-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html
http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml
http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-04-07 03:50:42-0400.
Report generated on 2023-06-20 13:37:29 by CPU2017 PS formatter v6716.
Originally published on 2023-06-06.