SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd. (IEI)

NF5280A7 (AMD EPYC 9754)

SPECrate®2017_fp_base = 1420

SPECrate®2017_fp_peak = 1570

CPU2017 License: 3358
Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)
Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Test Date: May-2023
Hardware Availability: Feb-2023
Software Availability: Nov-2022

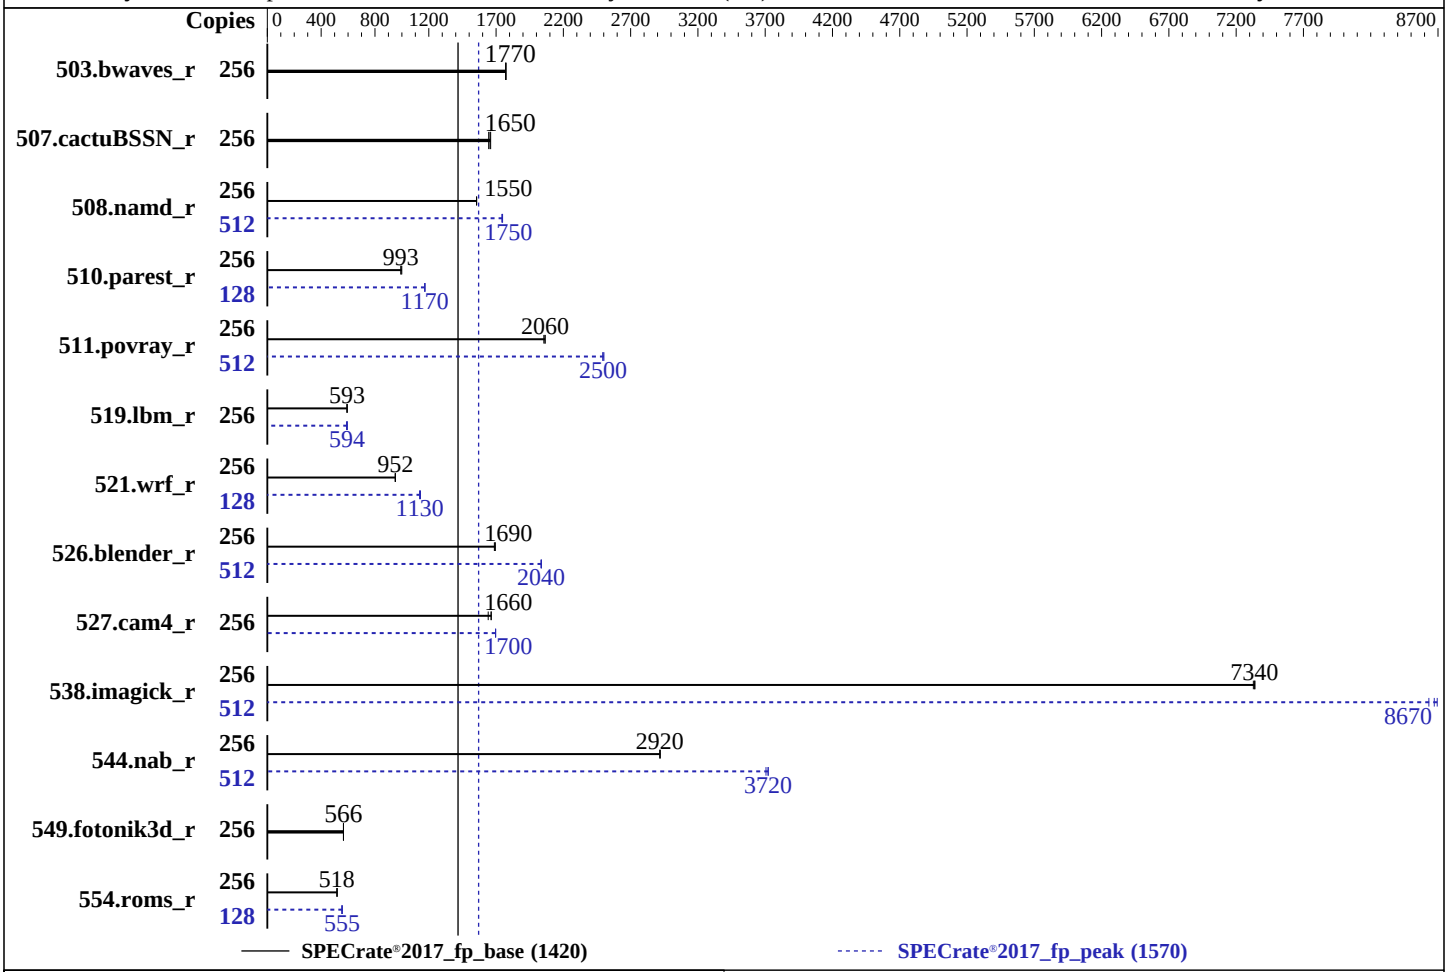

Hardware

CPU Name:	AMD EPYC 9754
Max MHz:	3100
Nominal:	2250
Enabled:	256 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 1 TB NVME SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 9 (Plow) 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	No
Firmware:	Version 04.02.14 released Dec-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	1449	1770	**1448**	**1770**	1448	1770	256	1449	1770	**1448**	**1770**	1448	1770
507.cactuBSSN_r	256	197	1640	195	1660	**196**	**1650**	256	197	1640	195	1660	**196**	**1650**
508.namd_r	256	156	1550	156	1560	**156**	**1550**	512	278	1750	**278**	**1750**	279	1740
510.parest_r	256	675	993	670	999	**674**	**993**	128	286	1170	286	1170	**286**	**1170**
511.povray_r	256	291	2050	290	2060	**290**	**2060**	512	480	2490	478	2500	**479**	**2500**
519.lbm_r	256	456	592	**455**	**593**	455	593	256	458	589	**454**	**594**	454	594
521.wrf_r	256	604	950	**603**	**952**	602	952	128	252	1140	**253**	**1130**	253	1130
526.blender_r	256	231	1690	**230**	**1690**	230	1690	512	**383**	**2040**	383	2040	383	2030
527.cam4_r	256	273	1640	**269**	**1660**	269	1660	256	264	1700	264	1700	**264**	**1700**
538.imagick_r	256	86.9	7330	86.7	7340	**86.8**	**7340**	512	**147**	**8670**	148	8630	146	8690
544.nab_r	256	**148**	**2920**	148	2920	148	2920	512	231	3720	**232**	**3720**	233	3710
549.fotonik3d_r	256	**1763**	**566**	1763	566	1763	566	256	**1763**	**566**	1763	566	1763	566
554.roms_r	256	**786**	**518**	784	519	786	518	128	365	557	367	554	**366**	**555**

SPECrate®2017_fp_base = 1420

SPECrate®2017_fp_peak = 1570

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
      "/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib:/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS configuration:
 SVM Mode = disable
 DRAM Scrub time = disable
 NUMA nodes per socket = NPS4
 Determinism Slider = Power
 cTDP = 400
 Package Power Limit = 400

 Sysinfo program /home/CPU2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Sun May 21 16:14:20 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
```

(Continued on next page)

Platform Notes (Continued)

```
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   16:14:20 up  7:10,  2 users,  load average: 201.19, 421.44, 474.06
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1      09:04    7:09m  1.64s  0.28s /bin/bash ./amd_rate_aocc400_genoa_B1.sh
  root     tty2      09:05    4:31m  0.06s  0.06s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 6190996
  max locked memory           (kbytes, -l) 2097152
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 6190996
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 18
 login -- root
 -bash
 python3 ./run_amd_rate_aocc400_genoa_B1.py
 /bin/bash ./amd_rate_aocc400_genoa_B1.sh
 runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
   rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.004/templogs/preenv.fprate.004.0.log --lognum 004.0 --from_runcpu 2
```


(Continued on next page)

Platform Notes (Continued)

```
 specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9754 128-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 160
    stepping        : 1
    microcode       : 0xaa00105
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 128
    siblings        : 256
    2 physical ids (chips)
    512 processors (hardware threads)
    physical id 0: core ids 0-127
    physical id 1: core ids 0-127
    physical id 0: apicids 0-255
    physical id 1: apicids 256-511
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          512
  On-line CPU(s) list:             0-511
  Vendor ID:                       AuthenticAMD
  BIOS Vendor ID:                  Advanced Micro Devices, Inc.
  Model name:                      AMD EPYC 9754 128-Core Processor
  BIOS Model name:                 AMD EPYC 9754 128-Core Processor
  CPU family:                      25
  Model:                           160
  Thread(s) per core:              2
  Core(s) per socket:              128
  Socket(s):                       2
  Stepping:                        1
  Frequency boost:                 enabled
  CPU max MHz:                     3100.3411
  CPU min MHz:                     1500.0000
  BogoMIPS:                        4500.35
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                   constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                   pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                   popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                   abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                   perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                   invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                   avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                   xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                   avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
```

(Continued on next page)

Platform Notes (Continued)

```
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
  Virtualization:       AMD-V
  L1d cache:            8 MiB (256 instances)
  L1i cache:            8 MiB (256 instances)
  L2 cache:             256 MiB (256 instances)
  L3 cache:             512 MiB (32 instances)
  NUMA node(s):         32
  NUMA node0 CPU(s):    0-7,256-263
  NUMA node1 CPU(s):    8-15,264-271
  NUMA node2 CPU(s):    16-23,272-279
  NUMA node3 CPU(s):    24-31,280-287
  NUMA node4 CPU(s):    32-39,288-295
  NUMA node5 CPU(s):    40-47,296-303
  NUMA node6 CPU(s):    48-55,304-311
  NUMA node7 CPU(s):    56-63,312-319
  NUMA node8 CPU(s):    64-71,320-327
  NUMA node9 CPU(s):    72-79,328-335
  NUMA node10 CPU(s):   80-87,336-343
  NUMA node11 CPU(s):   88-95,344-351
  NUMA node12 CPU(s):   96-103,352-359
  NUMA node13 CPU(s):   104-111,360-367
  NUMA node14 CPU(s):   112-119,368-375
  NUMA node15 CPU(s):   120-127,376-383
  NUMA node16 CPU(s):   128-135,384-391
  NUMA node17 CPU(s):   136-143,392-399
  NUMA node18 CPU(s):   144-151,400-407
  NUMA node19 CPU(s):   152-159,408-415
  NUMA node20 CPU(s):   160-167,416-423
  NUMA node21 CPU(s):   168-175,424-431
  NUMA node22 CPU(s):   176-183,432-439
  NUMA node23 CPU(s):   184-191,440-447
  NUMA node24 CPU(s):   192-199,448-455
  NUMA node25 CPU(s):   200-207,456-463
  NUMA node26 CPU(s):   208-215,464-471
  NUMA node27 CPU(s):   216-223,472-479
  NUMA node28 CPU(s):   224-231,480-487
  NUMA node29 CPU(s):   232-239,488-495
  NUMA node30 CPU(s):   240-247,496-503
  NUMA node31 CPU(s):   248-255,504-511
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                   filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       32K       8M    8 Data            1    64        1             64
      L1i       32K       8M    8 Instruction     1    64        1             64
      L2         1M     256M    8 Unified         2  2048        1             64
      L3        16M     512M   16 Unified         3 16384        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 32 nodes (0-31)
  node 0 cpus: 0-7,256-263
  node 0 size: 48176 MB
  node 0 free: 47202 MB
  node 1 cpus: 8-15,264-271
  node 1 size: 48380 MB
  node 1 free: 47584 MB
  node 2 cpus: 16-23,272-279
  node 2 size: 48380 MB
  node 2 free: 47613 MB
  node 3 cpus: 24-31,280-287
  node 3 size: 48380 MB
  node 3 free: 47557 MB
  node 4 cpus: 32-39,288-295
  node 4 size: 48380 MB
  node 4 free: 47602 MB
  node 5 cpus: 40-47,296-303
  node 5 size: 48380 MB
  node 5 free: 47612 MB
  node 6 cpus: 48-55,304-311
  node 6 size: 48380 MB
  node 6 free: 47612 MB
  node 7 cpus: 56-63,312-319
  node 7 size: 48380 MB
  node 7 free: 47624 MB
  node 8 cpus: 64-71,320-327
  node 8 size: 48380 MB
  node 8 free: 47612 MB
  node 9 cpus: 72-79,328-335
  node 9 size: 48380 MB
  node 9 free: 47604 MB
  node 10 cpus: 80-87,336-343
  node 10 size: 48380 MB
  node 10 free: 47610 MB
  node 11 cpus: 88-95,344-351
  node 11 size: 48380 MB
  node 11 free: 47620 MB
  node 12 cpus: 96-103,352-359
  node 12 size: 48380 MB
  node 12 free: 47599 MB
  node 13 cpus: 104-111,360-367
  node 13 size: 48380 MB
  node 13 free: 47605 MB
  node 14 cpus: 112-119,368-375
  node 14 size: 48380 MB
  node 14 free: 47618 MB
  node 15 cpus: 120-127,376-383
  node 15 size: 48380 MB
  node 15 free: 47616 MB
  node 16 cpus: 128-135,384-391
  node 16 size: 48344 MB
  node 16 free: 47577 MB
  node 17 cpus: 136-143,392-399
  node 17 size: 48380 MB
  node 17 free: 47625 MB
  node 18 cpus: 144-151,400-407
  node 18 size: 48380 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 18 free: 47629 MB
node 19 cpus: 152-159,408-415
node 19 size: 48380 MB
node 19 free: 47587 MB
node 20 cpus: 160-167,416-423
node 20 size: 48378 MB
node 20 free: 47613 MB
node 21 cpus: 168-175,424-431
node 21 size: 48382 MB
node 21 free: 47614 MB
node 22 cpus: 176-183,432-439
node 22 size: 48378 MB
node 22 free: 47608 MB
node 23 cpus: 184-191,440-447
node 23 size: 48382 MB
node 23 free: 47625 MB
node 24 cpus: 192-199,448-455
node 24 size: 48380 MB
node 24 free: 47608 MB
node 25 cpus: 200-207,456-463
node 25 size: 48380 MB
node 25 free: 47594 MB
node 26 cpus: 208-215,464-471
node 26 size: 48380 MB
node 26 free: 47618 MB
node 27 cpus: 216-223,472-479
node 27 size: 48380 MB
node 27 free: 47610 MB
node 28 cpus: 224-231,480-487
node 28 size: 48380 MB
node 28 free: 47588 MB
node 29 cpus: 232-239,488-495
node 29 size: 48380 MB
node 29 free: 47593 MB
node 30 cpus: 240-247,496-503
node 30 size: 48380 MB
node 30 free: 47601 MB
node 31 cpus: 248-255,504-511
node 31 size: 48298 MB
node 31 free: 47524 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
25  26  27  28  29  30  31
  0:  10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  1:  11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  2:  11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  3:  11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  4:  12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  5:  12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  6:  12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  7:  12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  8:  12  12  12  12  12  12  12  12  10  11  11  11  12  12  12  12  32  32  32  32  32  32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
     32  32  32  32  32  32  32
      9:  12  12  12  12  12  12  12  12  11  10  11  11  12  12  12  12  32  32  32  32  32  32  32  32  32
     32  32  32  32  32  32  32
     10:  12  12  12  12  12  12  12  12  11  11  10  11  12  12  12  12  32  32  32  32  32  32  32  32  32
     32  32  32  32  32  32  32
     11:  12  12  12  12  12  12  12  12  11  11  11  10  12  12  12  12  32  32  32  32  32  32  32  32  32
     32  32  32  32  32  32  32
     12:  12  12  12  12  12  12  12  12  12  12  12  12  10  11  11  11  32  32  32  32  32  32  32  32  32
     32  32  32  32  32  32  32
     13:  12  12  12  12  12  12  12  12  12  12  12  12  11  10  11  11  32  32  32  32  32  32  32  32  32
     32  32  32  32  32  32  32
     14:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  10  11  32  32  32  32  32  32  32  32  32
     32  32  32  32  32  32  32
     15:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  11  10  32  32  32  32  32  32  32  32  32
     32  32  32  32  32  32  32
     16:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  11  12  12  12  12  12
     12  12  12  12  12  12  12
     17:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  11  12  12  12  12  12
     12  12  12  12  12  12  12
     18:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  11  12  12  12  12  12
     12  12  12  12  12  12  12
     19:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  10  12  12  12  12  12
     12  12  12  12  12  12  12
     20:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  10  11  11  11  12
     12  12  12  12  12  12  12
     21:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  10  11  11  12
     12  12  12  12  12  12  12
     22:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  11  10  11  12
     12  12  12  12  12  12  12
     23:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  11  11  10  12
     12  12  12  12  12  12  12
     24:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  10
     11  11  11  12  12  12  12
     25:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
     10  11  11  12  12  12  12
     26:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
     11  10  11  12  12  12  12
     27:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
     11  11  10  12  12  12  12
     28:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
     12  12  12  10  11  11  11
     29:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
     12  12  12  11  10  11  11
     30:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
     12  12  12  11  11  10  11
     31:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
     12  12  12  11  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1585001860 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 21 09:04

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      degraded
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD   ACTIVE SUB    DESCRIPTION
  * NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                   dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                   nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                   systemd-network-generator tuned udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell
                   hwloc-dump-hwdata kvm_stat man-db-restart-cache-update nftables rdisc rhsm rhsm-facts
                   rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore
                   systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2250MHz

------------------------------------------------------------
16. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/CPU2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   819G   15G  805G   2% /home

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         IEI
    Product:        NF5280A7
    Product Family: Not specified
    Serial:         000000000

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    1x Samsung M321R8GA0BB0-CQKDS 64 GB 2 rank 4800
    23x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800


------------------------------------------------------------
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      04.02.14
    BIOS Date:         12/29/2022
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

526.blender_r: `-funsigned-char -DSPEC_LP64`
527.cam4_r: `-DSPEC_CASE_FLAG -DSPEC_LP64`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang
```

C++ benchmarks:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Benchmarks using both C and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

538.imagick_r: Same as 519.lbm_r

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000

(Continued on next page)

Peak Optimization Flags (Continued)

544.nab_r (continued):
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

C++ benchmarks:

508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc

(Continued on next page)

Peak Optimization Flags (Continued)

521.wrf_r (continued):
-lflang

527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang

Benchmarks using both C and C++:

511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc

526.blender_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-finline-aggressive -mllvm -unroll-threshold=100 -lamdlibm
-lamdalloc

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc400-flags.html`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V3.0.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc400-flags.xml`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V3.0.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-21 16:14:20-0400.
Report generated on 2023-06-06 19:11:29 by CPU2017 PS formatter v6716.
Originally published on 2023-06-06.