SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 299

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Nov-2022

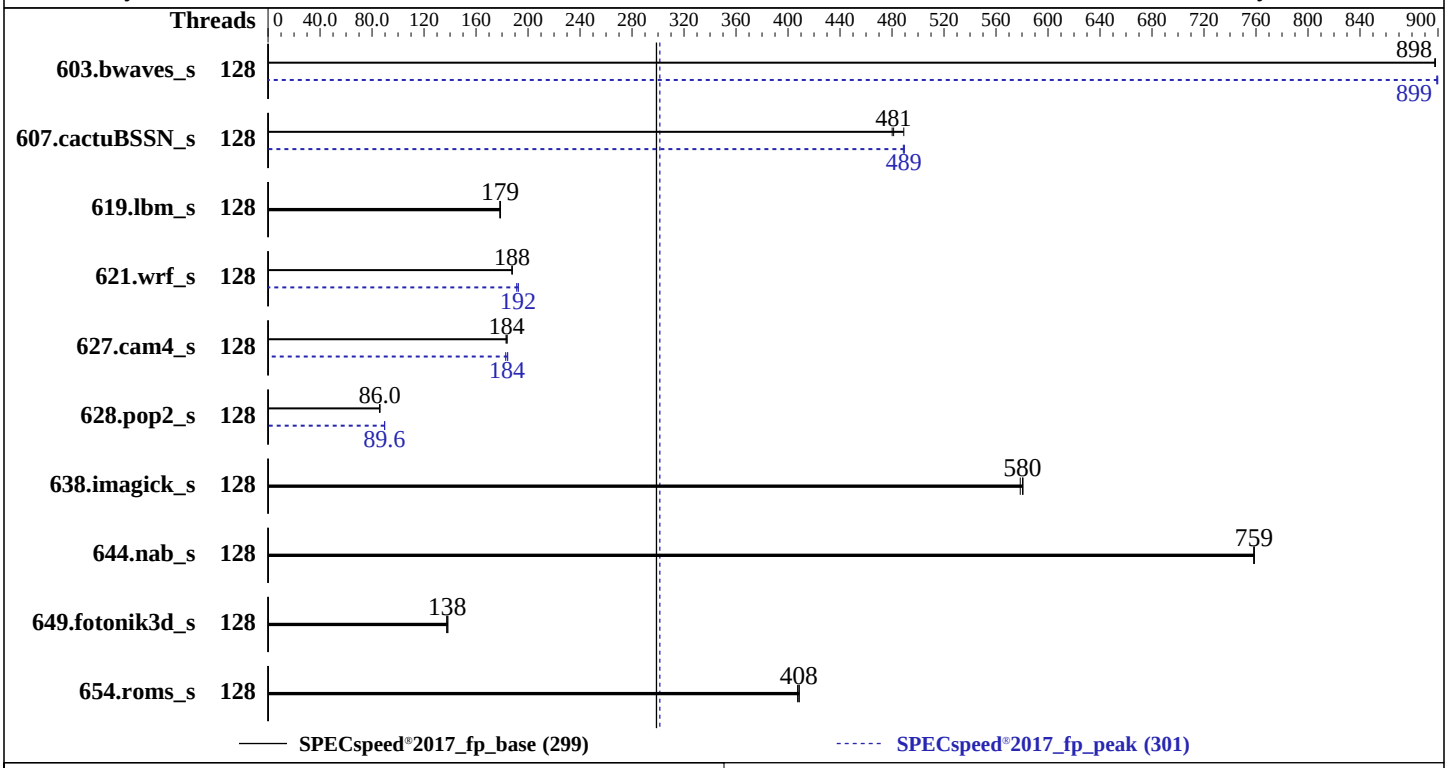

Hardware

CPU Name:	AMD EPYC 9754
Max MHz:	3100
Nominal:	2250
Enabled:	128 cores, 1 chip
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 8 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) Kernel 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	Yes
Firmware:	HPE BIOS Version v1.30 03/06/2023 released Mar-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	65.7	898	**65.7**	**898**	65.7	898	128	65.6	899	65.6	900	**65.6**	**899**
607.cactuBSSN_s	128	**34.6**	**481**	34.7	480	34.1	489	128	34.1	490	**34.1**	**489**	34.1	489
619.lbm_s	128	29.4	178	**29.3**	**179**	29.3	179	128	29.4	178	**29.3**	**179**	29.3	179
621.wrf_s	128	**70.4**	**188**	70.4	188	70.5	188	128	69.2	191	68.7	193	**68.7**	**192**
627.cam4_s	128	48.4	183	**48.2**	**184**	48.2	184	128	48.5	183	**48.2**	**184**	48.1	184
628.pop2_s	128	138	86.0	138	85.8	**138**	**86.0**	128	**132**	**89.6**	132	89.7	133	89.6
638.imagick_s	128	24.9	579	24.8	581	**24.9**	**580**	128	24.9	579	24.8	581	**24.9**	**580**
644.nab_s	128	**23.0**	**759**	23.0	758	23.0	759	128	**23.0**	**759**	23.0	758	23.0	759
649.fotonik3d_s	128	66.3	137	**66.1**	**138**	65.9	138	128	66.3	137	**66.1**	**138**	65.9	138
654.roms_s	128	**38.6**	**408**	38.7	407	38.5	409	128	**38.6**	**408**	38.7	407	38.5	409

SPECspeed®2017_fp_base = 299

SPECspeed®2017_fp_peak = 301

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To disable THP for peak runs of 621.wrf_s:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-127"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration
 Workload Profile set to General Peak Frequency Compute
 AMD SMT Option set to Disabled
 Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 Memory PStates set to Disabled
```

(Continued on next page)

Platform Notes (Continued)

```
 ACPI CST C2 Latency set to 18 microseconds
 Thermal Configuration set to Maximum Cooling

The reported date by sysinfo is incorrect due to computer clock being not set correctly.
The correct test date is: May-2023.

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Thu Apr  7 07:58:24 2022

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
   x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    07:58:24 up  2:28,  1 user,  load average: 0.07, 0.02, 0.46
   USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
   root     pts/0     05:31   15.00s  1.16s  0.09s /bin/bash ./amd_speed_aocc400_genoa_B1.sh

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   real-time non-blocking time  (microseconds, -R) unlimited
   core file size              (blocks, -c) 0
   data seg size               (kbytes, -d) unlimited
   scheduling priority                 (-e) 0
```

(Continued on next page)

Platform Notes (Continued)

```
   file size                   (blocks, -f) unlimited
   pending signals                     (-i) 3094694
   max locked memory           (kbytes, -l) 2097152
   max memory size             (kbytes, -m) unlimited
   open files                          (-n) 1024
   pipe size                (512 bytes, -p) 8
   POSIX message queues         (bytes, -q) 819200
   real-time priority                  (-r) 0
   stack size                  (kbytes, -s) unlimited
   cpu time                   (seconds, -t) unlimited
   max user processes                  (-u) 3094694
   virtual memory              (kbytes, -v) unlimited
   file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 28
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 -bash
 python3 ./run_fpspeed.py
 /bin/bash ./amd_speed_aocc400_genoa_B1.sh
 runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 fpspeed
 runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9754 128-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 160
    stepping        : 2
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 128
    siblings        : 128
    1 physical ids (chips)
    128 processors (hardware threads)
    physical id 0: core ids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
    physical id 0: apicids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
```

(Continued on next page)

Platform Notes (Continued)

```
Byte Order:                      Little Endian
CPU(s):                          128
On-line CPU(s) list:             0-127
Vendor ID:                       AuthenticAMD
BIOS Vendor ID:                  Advanced Micro Devices, Inc.
Model name:                      AMD EPYC 9754 128-Core Processor
BIOS Model name:                 AMD EPYC 9754 128-Core Processor
CPU family:                      25
Model:                           160
Thread(s) per core:              1
Core(s) per socket:              128
Socket(s):                       1
Stepping:                        2
BogoMIPS:                        4493.31
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                 constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                 pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                 popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                 abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                 perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                 avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                 xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                 avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                                 svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                 pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                 umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                 avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:                  AMD-V
L1d cache:                       4 MiB (128 instances)
L1i cache:                       4 MiB (128 instances)
L2 cache:                        128 MiB (128 instances)
L3 cache:                        256 MiB (16 instances)
NUMA node(s):                    16
NUMA node0 CPU(s):               0-7
NUMA node1 CPU(s):               8-15
NUMA node2 CPU(s):               64-71
NUMA node3 CPU(s):               72-79
NUMA node4 CPU(s):               32-39
NUMA node5 CPU(s):               40-47
NUMA node6 CPU(s):               96-103
NUMA node7 CPU(s):               104-111
NUMA node8 CPU(s):               48-55
NUMA node9 CPU(s):               56-63
NUMA node10 CPU(s):              112-119
NUMA node11 CPU(s):              120-127
NUMA node12 CPU(s):              16-23
NUMA node13 CPU(s):              24-31
NUMA node14 CPU(s):              80-87
NUMA node15 CPU(s):              88-95
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                 filling
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       4M    8 Data            1    64        1             64
     L1i       32K       4M    8 Instruction     1    64        1             64
     L2         1M     128M    8 Unified         2  2048        1             64
     L3        16M     256M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0-7
  node 0 size: 48135 MB
  node 0 free: 47479 MB
  node 1 cpus: 8-15
  node 1 size: 48382 MB
  node 1 free: 47730 MB
  node 2 cpus: 64-71
  node 2 size: 48382 MB
  node 2 free: 48101 MB
  node 3 cpus: 72-79
  node 3 size: 48382 MB
  node 3 free: 48068 MB
  node 4 cpus: 32-39
  node 4 size: 48382 MB
  node 4 free: 48071 MB
  node 5 cpus: 40-47
  node 5 size: 48382 MB
  node 5 free: 48047 MB
  node 6 cpus: 96-103
  node 6 size: 48382 MB
  node 6 free: 48021 MB
  node 7 cpus: 104-111
  node 7 size: 48382 MB
  node 7 free: 47853 MB
  node 8 cpus: 48-55
  node 8 size: 48382 MB
  node 8 free: 48144 MB
  node 9 cpus: 56-63
  node 9 size: 48345 MB
  node 9 free: 48070 MB
  node 10 cpus: 112-119
  node 10 size: 48382 MB
  node 10 free: 48020 MB
  node 11 cpus: 120-127
  node 11 size: 48328 MB
  node 11 free: 47970 MB
  node 12 cpus: 16-23
  node 12 size: 48382 MB
  node 12 free: 48067 MB
  node 13 cpus: 24-31
  node 13 size: 48382 MB
  node 13 free: 48129 MB
  node 14 cpus: 80-87
  node 14 size: 48382 MB
  node 14 free: 47975 MB
  node 15 cpus: 88-95
```

(Continued on next page)

Platform Notes (Continued)

```
  node 15 size: 48382 MB
  node 15 free: 47989 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
    0:  10  11  11  11  11  11  11  11  11  11  11  11  11  11  11  11
    1:  11  10  11  11  11  11  11  11  11  11  11  11  11  11  11  11
    2:  11  11  10  11  11  11  11  11  11  11  11  11  11  11  11  11
    3:  11  11  11  10  11  11  11  11  11  11  11  11  11  11  11  11
    4:  11  11  11  11  10  11  11  11  11  11  11  11  11  11  11  11
    5:  11  11  11  11  11  10  11  11  11  11  11  11  11  11  11  11
    6:  11  11  11  11  11  11  10  11  11  11  11  11  11  11  11  11
    7:  11  11  11  11  11  11  11  10  11  11  11  11  11  11  11  11
    8:  11  11  11  11  11  11  11  11  10  11  11  11  11  11  11  11
    9:  11  11  11  11  11  11  11  11  11  10  11  11  11  11  11  11
   10:  11  11  11  11  11  11  11  11  11  11  10  11  11  11  11  11
   11:  11  11  11  11  11  11  11  11  11  11  11  10  11  11  11  11
   12:  11  11  11  11  11  11  11  11  11  11  11  11  10  11  11  11
   13:  11  11  11  11  11  11  11  11  11  11  11  11  11  10  11  11
   14:  11  11  11  11  11  11  11  11  11  11  11  11  11  11  10  11
   15:  11  11  11  11  11  11  11  11  11  11  11  11  11  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792348912 kB

------------------------------------------------------------
10. who -r
  run-level 3 Apr 7 05:30

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
                   dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                   nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                   systemd-network-generator udisks2
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability console-getty cpupower debug-shell hwloc-dump-hwdata kvm_stat
                   man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@
                   sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
```

(Continued on next page)

Platform Notes (Continued)

```
     boost state support:
       Supported: yes
       Active: yes
       Boost States: 0
       Total States: 3
       Pstate-P0:  2250MHz

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   819G  9.7G  809G   2% /home

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 20. /sys/devices/virtual/dmi/id
     Vendor:         HPE
     Product:        ProLiant DL345 Gen11
     Product Family: ProLiant
     Serial:         DL345G11-004

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     12x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      1.30
    BIOS Date:         03/06/2023
    BIOS Revision:     1.30
    Firmware Revision: 1.20
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Base Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-return-type -Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `basepeak = yes`

644.nab_s: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt

(Continued on next page)

Peak Optimization Flags (Continued)

628.pop2_s (continued):
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.html
http://www.spec.org/cpu2017/flags/aocc400-flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.xml
http://www.spec.org/cpu2017/flags/aocc400-flags.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-04-06 22:28:23-0400.
Report generated on 2023-06-13 15:16:28 by CPU2017 PS formatter v6716.
Originally published on 2023-06-13.