SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1450

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Nov-2022

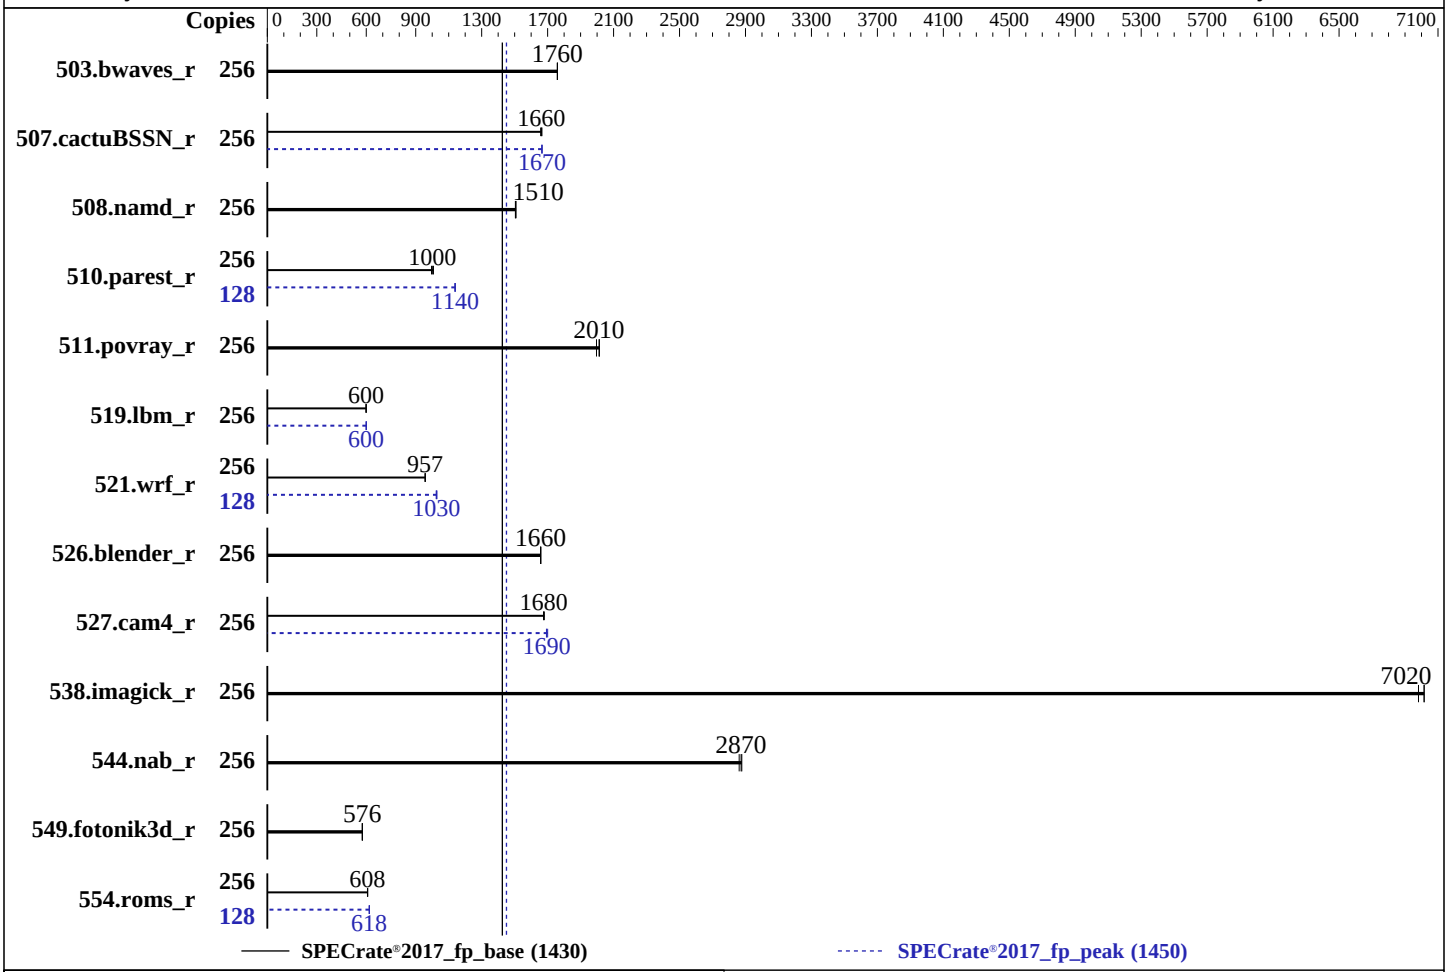

Hardware

CPU Name:	AMD EPYC 9754
Max MHz:	3100
Nominal:	2250
Enabled:	256 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) Kernel 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	No
Firmware:	HPE BIOS Version v1.30 03/06/2023 released Mar-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	1459	1760	1460	1760	**1459**	**1760**	256	1459	1760	1460	1760	**1459**	**1760**
507.cactuBSSN_r	256	195	1670	196	1660	**195**	**1660**	256	195	1660	195	1670	**195**	**1670**
508.namd_r	256	161	1510	**162**	**1510**	162	1500	256	161	1510	**162**	**1510**	162	1500
510.parest_r	256	673	996	665	1010	**668**	**1000**	128	294	1140	**294**	**1140**	294	1140
511.povray_r	256	297	2010	299	2000	**297**	**2010**	256	297	2010	299	2000	**297**	**2010**
519.lbm_r	256	450	600	451	598	**450**	**600**	256	450	599	**450**	**600**	449	601
521.wrf_r	256	599	958	**599**	**957**	599	957	128	**280**	**1030**	280	1020	279	1030
526.blender_r	256	**235**	**1660**	235	1660	235	1660	256	**235**	**1660**	235	1660	235	1660
527.cam4_r	256	267	1680	**267**	**1680**	267	1680	256	263	1700	**264**	**1690**	264	1690
538.imagick_r	256	91.2	6980	90.7	7020	**90.7**	**7020**	256	91.2	6980	90.7	7020	**90.7**	**7020**
544.nab_r	256	151	2860	150	2880	**150**	**2870**	256	151	2860	150	2880	**150**	**2870**
549.fotonik3d_r	256	1731	576	**1731**	**576**	1731	576	256	1731	576	**1731**	**576**	1731	576
554.roms_r	256	668	609	**669**	**608**	670	607	128	329	618	**329**	**618**	328	619

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1450

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
      "/home/cpu2017/amd_rate_aocc400_genoa_B_lib/lib:/home/cpu2017/amd_rate_aocc400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration
 Workload Profile set to General Throughput Compute
 AMD SMT Option set to Disabled
 Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 NUMA memory domains per socket set to Four memory domains per socket
 ACPI CST C2 Latency set to 18 microseconds
 Thermal Configuration set to Maximum Cooling
 Data Fabric C-State Enable set to Force Enabled
 Workload Profile set to Custom
  Power Regulator set to OS Control Mode
  L2 HW Prefetcher set to Disabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Thu May 18 23:34:11 2023

 SUT (System Under Test) info as seen by some common utilities.

 ----------------------------------------------------------
 Table of contents
 ----------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
```

(Continued on next page)

Platform Notes (Continued)

```
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   23:34:11 up  1:09,  2 users,  load average: 0.26, 0.06, 0.02
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1      23:27    6:19   0.00s  0.00s -bash
  root     pts/0     23:28   24.00s  1.44s  0.15s /bin/bash ./amd_rate_aocc400_genoa_B1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 6191076
  max locked memory           (kbytes, -l) 2097152
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 6191076
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
```

(Continued on next page)

Platform Notes (Continued)

```
 sshd: root@pts/0
 -bash
 python3 ./run_fprate.py
 /bin/bash ./amd_rate_aocc400_genoa_B1.sh
 runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
   rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.005/templogs/preenv.fprate.005.0.log --lognum 005.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9754 128-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 160
    stepping        : 2
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 128
    siblings        : 128
    2 physical ids (chips)
    256 processors (hardware threads)
    physical id 0: core ids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
    physical id 1: core ids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
    physical id 0: apicids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
    physical id 1: apicids
    256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4
    64-471,480-487,496-503
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          256
  On-line CPU(s) list:             0-255
  Vendor ID:                       AuthenticAMD
  BIOS Vendor ID:                  Advanced Micro Devices, Inc.
  Model name:                      AMD EPYC 9754 128-Core Processor
  BIOS Model name:                 AMD EPYC 9754 128-Core Processor
  CPU family:                      25
  Model:                           160
  Thread(s) per core:              1
  Core(s) per socket:              128
  Socket(s):                       2
  Stepping:                        2
  Frequency boost:                 enabled
```

(Continued on next page)

Platform Notes (Continued)

```
CPU max MHz:                     2250.0000
CPU min MHz:                     1500.0000
BogoMIPS:                        4493.27
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                 constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                 pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                 popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                 abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                 perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                 avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                 xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                 avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                                 svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                 pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                 umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                 avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:                  AMD-V
L1d cache:                       8 MiB (256 instances)
L1i cache:                       8 MiB (256 instances)
L2 cache:                        256 MiB (256 instances)
L3 cache:                        512 MiB (32 instances)
NUMA node(s):                    32
NUMA node0 CPU(s):               0-7
NUMA node1 CPU(s):               8-15
NUMA node2 CPU(s):               64-71
NUMA node3 CPU(s):               72-79
NUMA node4 CPU(s):               32-39
NUMA node5 CPU(s):               40-47
NUMA node6 CPU(s):               96-103
NUMA node7 CPU(s):               104-111
NUMA node8 CPU(s):               48-55
NUMA node9 CPU(s):               56-63
NUMA node10 CPU(s):              112-119
NUMA node11 CPU(s):              120-127
NUMA node12 CPU(s):              16-23
NUMA node13 CPU(s):              24-31
NUMA node14 CPU(s):              80-87
NUMA node15 CPU(s):              88-95
NUMA node16 CPU(s):              128-135
NUMA node17 CPU(s):              136-143
NUMA node18 CPU(s):              192-199
NUMA node19 CPU(s):              200-207
NUMA node20 CPU(s):              160-167
NUMA node21 CPU(s):              168-175
NUMA node22 CPU(s):              224-231
NUMA node23 CPU(s):              232-239
NUMA node24 CPU(s):              176-183
NUMA node25 CPU(s):              184-191
NUMA node26 CPU(s):              240-247
NUMA node27 CPU(s):              248-255
NUMA node28 CPU(s):              144-151
NUMA node29 CPU(s):              152-159
NUMA node30 CPU(s):              208-215
NUMA node31 CPU(s):              216-223
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                   filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       8M    8 Data            1    64        1             64
     L1i       32K       8M    8 Instruction     1    64        1             64
     L2         1M     256M    8 Unified         2  2048        1             64
     L3        16M     512M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 32 nodes (0-31)
  node 0 cpus: 0-7
  node 0 size: 48135 MB
  node 0 free: 47908 MB
  node 1 cpus: 8-15
  node 1 size: 48382 MB
  node 1 free: 48216 MB
  node 2 cpus: 64-71
  node 2 size: 48382 MB
  node 2 free: 48229 MB
  node 3 cpus: 72-79
  node 3 size: 48382 MB
  node 3 free: 48242 MB
  node 4 cpus: 32-39
  node 4 size: 48382 MB
  node 4 free: 48245 MB
  node 5 cpus: 40-47
  node 5 size: 48382 MB
  node 5 free: 48253 MB
  node 6 cpus: 96-103
  node 6 size: 48382 MB
  node 6 free: 48260 MB
  node 7 cpus: 104-111
  node 7 size: 48382 MB
  node 7 free: 48203 MB
  node 8 cpus: 48-55
  node 8 size: 48382 MB
  node 8 free: 48012 MB
  node 9 cpus: 56-63
  node 9 size: 48382 MB
  node 9 free: 48079 MB
  node 10 cpus: 112-119
  node 10 size: 48382 MB
  node 10 free: 48068 MB
  node 11 cpus: 120-127
  node 11 size: 48382 MB
  node 11 free: 48192 MB
  node 12 cpus: 16-23
  node 12 size: 48382 MB
  node 12 free: 48124 MB
  node 13 cpus: 24-31
  node 13 size: 48382 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 13 free: 48196 MB
node 14 cpus: 80-87
node 14 size: 48382 MB
node 14 free: 48190 MB
node 15 cpus: 88-95
node 15 size: 48382 MB
node 15 free: 48198 MB
node 16 cpus: 128-135
node 16 size: 48382 MB
node 16 free: 48295 MB
node 17 cpus: 136-143
node 17 size: 48382 MB
node 17 free: 48294 MB
node 18 cpus: 192-199
node 18 size: 48382 MB
node 18 free: 48253 MB
node 19 cpus: 200-207
node 19 size: 48382 MB
node 19 free: 48225 MB
node 20 cpus: 160-167
node 20 size: 48382 MB
node 20 free: 48223 MB
node 21 cpus: 168-175
node 21 size: 48382 MB
node 21 free: 48218 MB
node 22 cpus: 224-231
node 22 size: 48382 MB
node 22 free: 48220 MB
node 23 cpus: 232-239
node 23 size: 48382 MB
node 23 free: 48219 MB
node 24 cpus: 176-183
node 24 size: 48382 MB
node 24 free: 48249 MB
node 25 cpus: 184-191
node 25 size: 48382 MB
node 25 free: 48247 MB
node 26 cpus: 240-247
node 26 size: 48382 MB
node 26 free: 48220 MB
node 27 cpus: 248-255
node 27 size: 48382 MB
node 27 free: 48221 MB
node 28 cpus: 144-151
node 28 size: 48382 MB
node 28 free: 48207 MB
node 29 cpus: 152-159
node 29 size: 48382 MB
node 29 free: 48219 MB
node 30 cpus: 208-215
node 30 size: 48382 MB
node 30 free: 48127 MB
node 31 cpus: 216-223
node 31 size: 48273 MB
node 31 free: 48122 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
25  26  27  28  29  30  31
  0:  10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
  1:  11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
  2:  11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
  3:  11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
  4:  12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
  5:  12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
  6:  12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
  7:  12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
  8:  12  12  12  12  12  12  12  12  10  11  11  11  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
  9:  12  12  12  12  12  12  12  12  11  10  11  11  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 10:  12  12  12  12  12  12  12  12  11  11  10  11  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 11:  12  12  12  12  12  12  12  12  11  11  11  10  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 12:  12  12  12  12  12  12  12  12  12  12  12  12  10  11  11  11  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 13:  12  12  12  12  12  12  12  12  12  12  12  12  12  11  10  11  11  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 14:  12  12  12  12  12  12  12  12  12  12  12  12  12  11  11  10  11  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 15:  12  12  12  12  12  12  12  12  12  12  12  12  12  11  11  11  10  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 16:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  11  12  12  12  12  12
 12  12  12  12  12  12  12
 17:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  11  12  12  12  12  12
 12  12  12  12  12  12  12
 18:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  11  12  12  12  12  12
 12  12  12  12  12  12  12
 19:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  10  12  12  12  12  12
 12  12  12  12  12  12  12
 20:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  10  11  11  11  12
 12  12  12  12  12  12  12
 21:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  10  11  11  12
 12  12  12  12  12  12  12
 22:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  11  10  11  12
 12  12  12  12  12  12  12
 23:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  11  11  10  12
 12  12  12  12  12  12  12
 24:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  10
 11  11  11  12  12  12  12
 25:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
 10  11  11  12  12  12  12
 26:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
 11  10  11  12  12  12  12
 27:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
 11  11  10  12  12  12  12
 28:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
 12  12  12  10  11  11  11
 29:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
 12  12  12  11  10  11  11
 30:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
 12  12  12  11  11  10  11
```

(Continued on next page)

Platform Notes (Continued)

```
    31:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
    12  12  12  11  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1585022512 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 18 22:25

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                  LOAD   ACTIVE SUB    DESCRIPTION
  * dnf-makecache.service loaded failed failed dnf makecache

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
                   dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                   nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                   systemd-network-generator tuned udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait chronyd cni-dhcp console-getty cpupower
                   debug-shell hwloc-dump-hwdata ipsec kvm_stat man-db-restart-cache-update nftables podman
                   podman-auto-update podman-restart powertop rdisc rhsm rhsm-facts rpmdb-rebuild
                   serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2250MHz

------------------------------------------------------------
16. tuned-adm active
```

(Continued on next page)

Platform Notes (Continued)

```
  Current active profile: throughput-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/cpu2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   372G  8.5G  363G   3% /home

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL385 Gen11
    Product Family: ProLiant
    Serial:         DL385G11-003
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 23. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     24x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800


 ------------------------------------------------------------
 24. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      1.30
    BIOS Date:         03/06/2023
    BIOS Revision:     1.30
    Firmware Revision: 1.20
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

C++ benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Benchmarks using both C and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math`

(Continued on next page)

Peak Optimization Flags (Continued)

519.lbm_r (continued):
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive

(Continued on next page)

Peak Optimization Flags (Continued)

521.wrf_r (continued):
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang

527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -faggressive-loop-transform -fvector-transform
-fscalar-transform -Mrecursive -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.html`
`http://www.spec.org/cpu2017/flags/aocc400-flags.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.xml`
`http://www.spec.org/cpu2017/flags/aocc400-flags.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-18 14:04:10-0400.
Report generated on 2023-06-13 15:17:08 by CPU2017 PS formatter v6716.
Originally published on 2023-06-13.