SPEC CPU®2017 Integer Rate Result

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9
(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017_int_base = 66.9

SPECrate®2017_int_peak = Not Run

CPU2017 License:	3	**Test Date:**	May-2023
Test Sponsor:	HPE	**Hardware Availability:**	Feb-2023
Tested by:	HPE	**Software Availability:**	Dec-2022

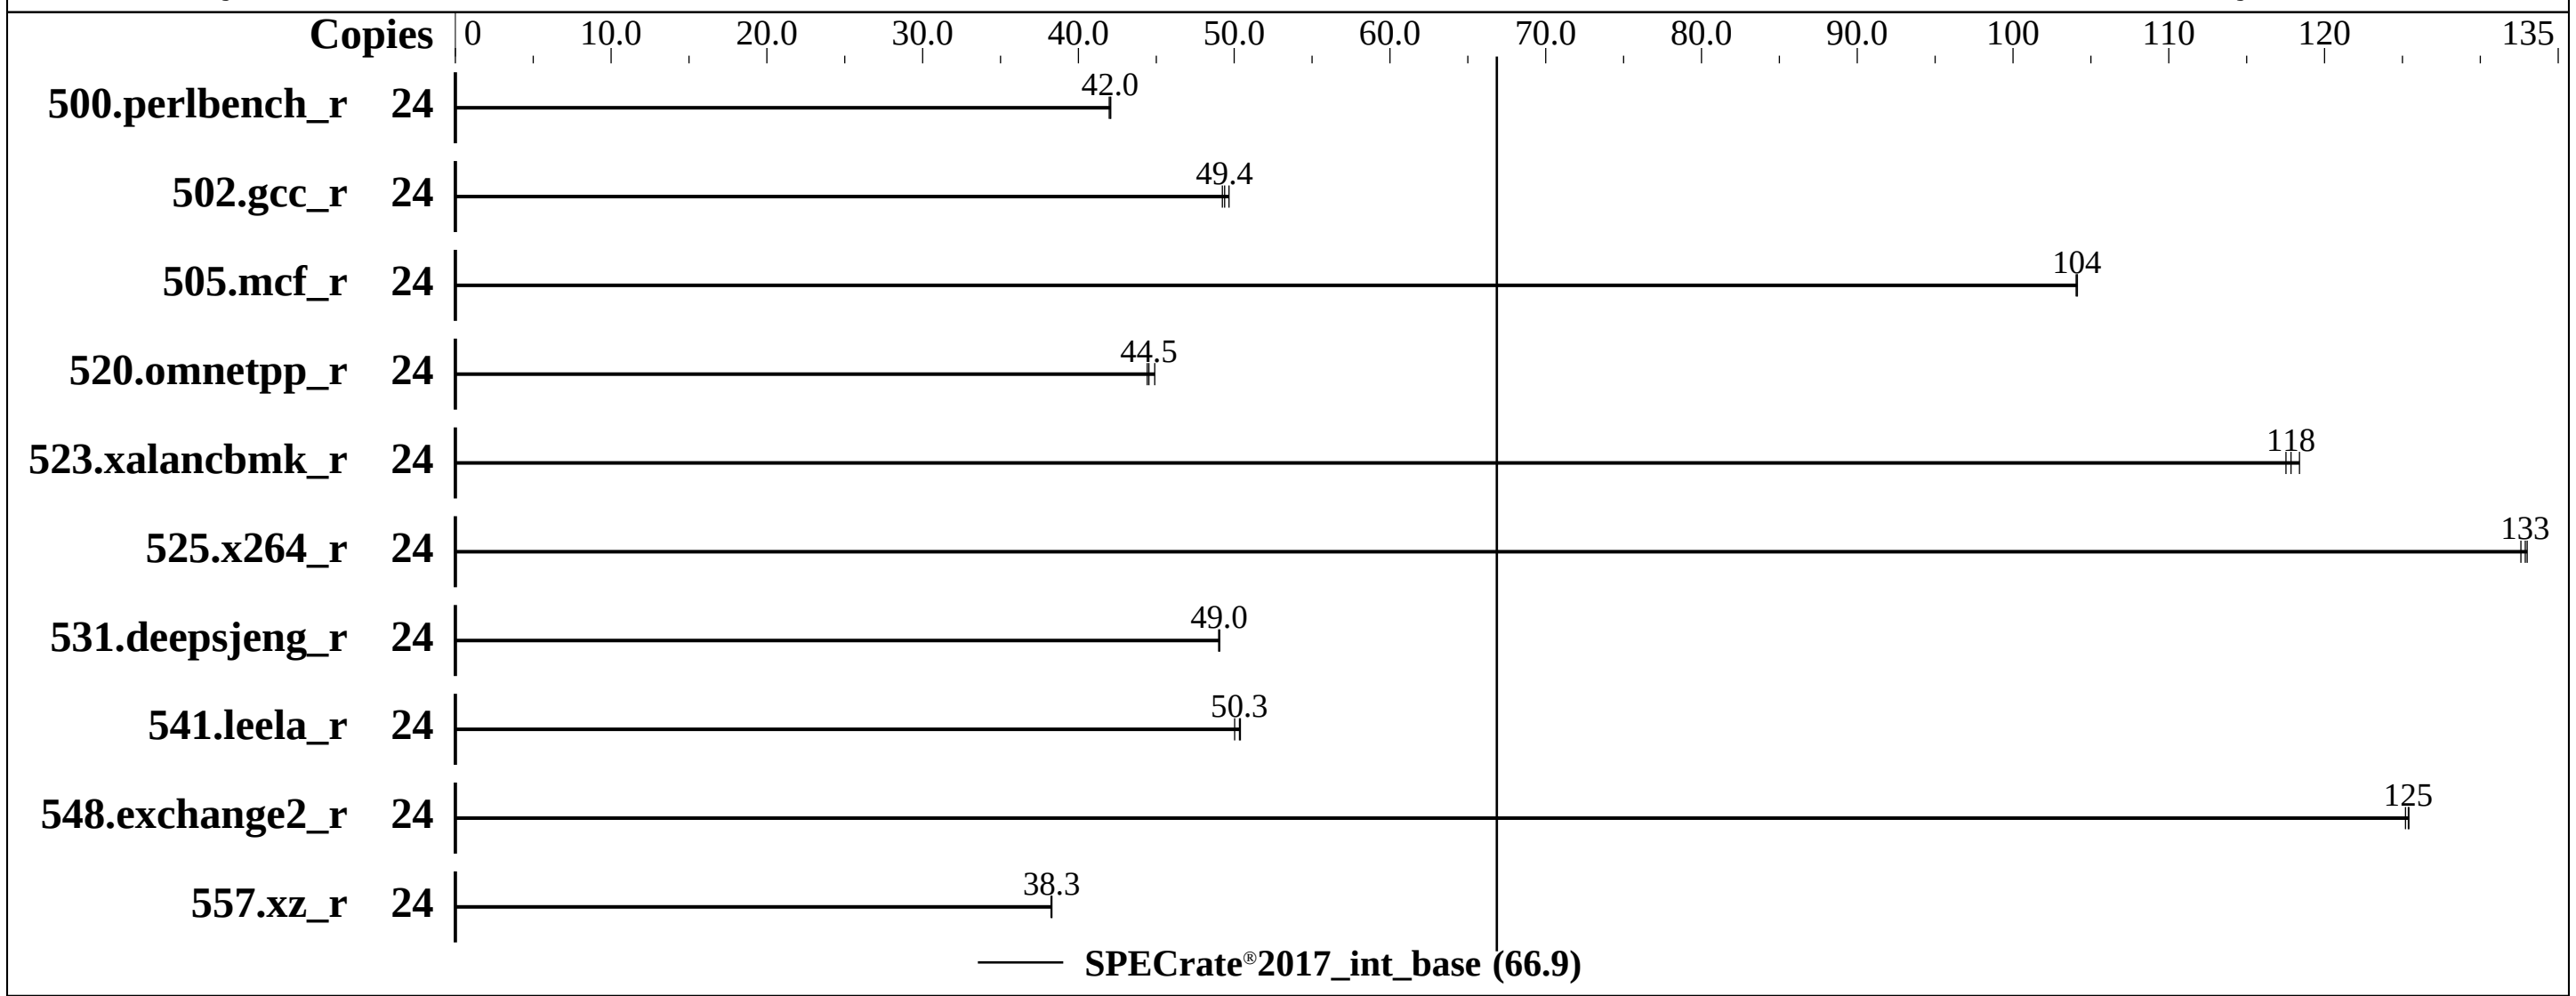

Hardware

CPU Name:	Intel Xeon E5-2620 v3
Max MHz:	3200
Nominal:	2400
Enabled:	12 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip (s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	256 KB I+D on chip per core
L3:	15 MB I+D on chip per chip
Other:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2400T-R, running at 1866)
Storage:	1 x 300 GB SAS 15K HDD, RAID 0
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) Kernel 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	HPE BIOS Version P89 v3.08 01/12/2023 released Feb-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL380 Gen9
(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017_int_base = 66.9

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE
Test Date: May-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
500.perlbench_r	24	908	42.1	**909**	**42.0**	910	42.0							
502.gcc_r	24	684	49.7	**688**	**49.4**	690	49.2							
505.mcf_r	24	373	104	372	104	**373**	**104**							
520.omnetpp_r	24	701	44.9	709	44.4	**707**	**44.5**							
523.xalancbmk_r	24	**215**	**118**	214	118	216	118							
525.x264_r	24	317	133	**316**	**133**	316	133							
531.deepsjeng_r	24	561	49.0	561	49.1	**561**	**49.0**							
541.leela_r	24	**790**	**50.3**	789	50.4	794	50.0							
548.exchange2_r	24	**502**	**125**	502	125	501	125							
557.xz_r	24	678	38.2	677	38.3	**677**	**38.3**							

SPECrate®2017_int_base = 66.9

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Submit Notes

```
This benchmark result is intended to provide perspective on
past performance using the historical hardware
and/or software described on this result page.
The system as described on this result page was formerly
generally available. At the time of this publication, it may
not be shipping, and/or may not be supported, and/or may fail
to meet other tests of General Availability described in the
SPEC OSG Policy document, http://www.spec.org/osg/policy.html
This measured result may not be representative of the result
that would be measured were this benchmark run with hardware
and software available as of the publication date.

This benchmark run is conducted using the latest binaries based
on IC23 and to suffice the minimum software requirement, the
Operating System used is RHEL9.0
```

Operating System Notes

```
 Stack size set to unlimited using "ulimit -s unlimited"
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8480+ CPU + 512GB RAM
 memory using Red Hat Enterprise Linux 9.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
The system ROM used for this result contains Intel microcode version 0x49 for
the Intel Xeon E5-2620 v3 processor.
BIOS Configuration:
 Power Profile set to Custom
 Power Regulator to Static High Performance Mode
 Minimum Processor Idle Power Core C-State set to C6 State
 Minimum Processor Idle Power Package C-State set to No Package State
 QPI Snoop Configuration set to Cluster on Die
 Thermal Configuration set to Maximum Cooling
 Collaborative Power Control set to Disabled
 Processor Power and Utilization Monitoring set to Disabled
 Memory Refresh Rate set to 1x Refresh
 Memory Patrol Scrubbing set to Disabled


 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Fri May  5 11:00:10 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
```

(Continued on next page)

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL380 Gen9
(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017_int_base = 66.9

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3		**Test Date:**	May-2023
Test Sponsor:	HPE	**Hardware Availability:**	Feb-2023
Tested by:	HPE	**Software Availability:**	Dec-2022

Platform Notes (Continued)

```
   5. sysinfo process ancestry
   6. /proc/cpuinfo
   7. lscpu
   8. numactl --hardware
   9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 250 (250-6.el9_0)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent_hugepage
  18. /sys/kernel/mm/transparent_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
  ------------------------------------------------------------

  ------------------------------------------------------------
  1. uname -a
    Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
    x86_64 x86_64 GNU/Linux

  ------------------------------------------------------------
  2. w
     11:00:10 up 1 day, 13:09,  1 user,  load average: 0.08, 0.13, 0.09
    USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
    root     pts/1     Thu10    9.00s  1.56s  0.00s -bash

  ------------------------------------------------------------
  3. Username
    From environment variable $USER:  root

  ------------------------------------------------------------
  4. ulimit -a
    real-time non-blocking time  (microseconds, -R) unlimited
    core file size              (blocks, -c) 0
    data seg size               (kbytes, -d) unlimited
    scheduling priority                 (-e) 0
    file size                   (blocks, -f) unlimited
    pending signals                     (-i) 514959
    max locked memory           (kbytes, -l) 64
    max memory size             (kbytes, -m) unlimited
    open files                          (-n) 1024
    pipe size                (512 bytes, -p) 8
    POSIX message queues         (bytes, -q) 819200
    real-time priority                  (-r) 0
    stack size                  (kbytes, -s) unlimited
    cpu time                   (seconds, -t) unlimited
    max user processes                  (-u) 514959
    virtual memory              (kbytes, -v) unlimited
    file locks                          (-x) unlimited

  ------------------------------------------------------------
  5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
```

(Continued on next page)

Platform Notes (Continued)

```
  sshd: root [priv]
  sshd: root@pts/1
  -bash
  -bash
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=24 -c
    ic2023.0-lin-core-avx2-rate-20221201.cfg --define smt-on --define cores=12 --define physicalfirst --define
    invoke_with_interleave --define drop_caches --tune base -o all intrate
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=24 --configfile
    ic2023.0-lin-core-avx2-rate-20221201.cfg --define smt-on --define cores=12 --define physicalfirst --define
    invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode rate
    --tune base --size refrate intrate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
 $SPEC = /home/cpu2017

 ------------------------------------------------------------
 6. /proc/cpuinfo
     model name      : Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 63
     stepping        : 2
     microcode       : 0x49
     bugs            : cpu_meltdown spectre_v1 spectre_v2 spec_store_bypass l1tf mds swapgs itlb_multihit
     cpu cores       : 6
     siblings        : 12
     2 physical ids (chips)
     24 processors (hardware threads)
     physical id 0: core ids 0-5
     physical id 1: core ids 0-5
     physical id 0: apicids 0-11
     physical id 1: apicids 16-27
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 48 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          24
   On-line CPU(s) list:             0-23
   Vendor ID:                       GenuineIntel
   BIOS Vendor ID:                  Intel(R) Corporation
   Model name:                      Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
   BIOS Model name:                 Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
   CPU family:                      6
   Model:                           63
   Thread(s) per core:              2
   Core(s) per socket:              6
   Socket(s):                       2
   Stepping:                        2
   BogoMIPS:                        4794.38
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
                                    cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
```

(Continued on next page)

Platform Notes (Continued)

```
                                   sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                   tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm cpuid_fault epb
                                   invpcid_single pti intel_ppin ssbd ibrs ibpb stibp tpr_shadow vnmi
                                   flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                                   invpcid cqm xsaveopt cqm_llc cqm_occup_llc dtherm ida arat pln pts
                                   md_clear flush_l1d
  Virtualization:                  VT-x
  L1d cache:                       384 KiB (12 instances)
  L1i cache:                       384 KiB (12 instances)
  L2 cache:                        3 MiB (12 instances)
  L3 cache:                        30 MiB (2 instances)
  NUMA node(s):                    2
  NUMA node0 CPU(s):               0-5,12-17
  NUMA node1 CPU(s):               6-11,18-23
  Vulnerability Itlb multihit:     KVM: Mitigation: VMX disabled
  Vulnerability L1tf:              Mitigation; PTE Inversion; VMX conditional cache flushes, SMT vulnerable
  Vulnerability Mds:               Mitigation; Clear CPU buffers; SMT vulnerable
  Vulnerability Meltdown:          Mitigation; PTI
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP conditional, RSB
                                   filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K     384K    8 Data            1    64        1             64
     L1i       32K     384K    8 Instruction     1    64        1             64
     L2       256K       3M    8 Unified         2   512        1             64
     L3        15M      30M   20 Unified         3 12288        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-5,12-17
  node 0 size: 64276 MB
  node 0 free: 52502 MB
  node 1 cpus: 6-11,18-23
  node 1 size: 64500 MB
  node 1 free: 62158 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       131867168 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 3 21:50

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      running
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                   dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd
                   rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
                   chrony-wait console-getty cpupower debug-shell hwloc-dump-hwdata ipsec kvm_stat
                   man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild
                   serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=UUID=0a5a10b9-6311-479c-8337-4f762c2bf51d
  ro
  resume=UUID=fd01a7f2-3350-4c31-a1e2-fb7f69bf936d

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda5      xfs   297G   27G  270G  10% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HP
    Product:        ProLiant DL380 Gen9
    Product Family: ProLiant
    Serial:         USE521R1JM

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    8x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400, configured at 1866


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HP
   BIOS Version:      P89
   BIOS Date:         01/12/2023
   BIOS Revision:     3.0
   Firmware Revision: 2.78
```

Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
```

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.1-HSW-revB.html
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.1-HSW-revB.xml
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-05 01:30:09-0400.
Report generated on 2024-01-29 17:47:56 by CPU2017 PS formatter v6716.
Originally published on 2023-06-06.