



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL380 Gen9

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

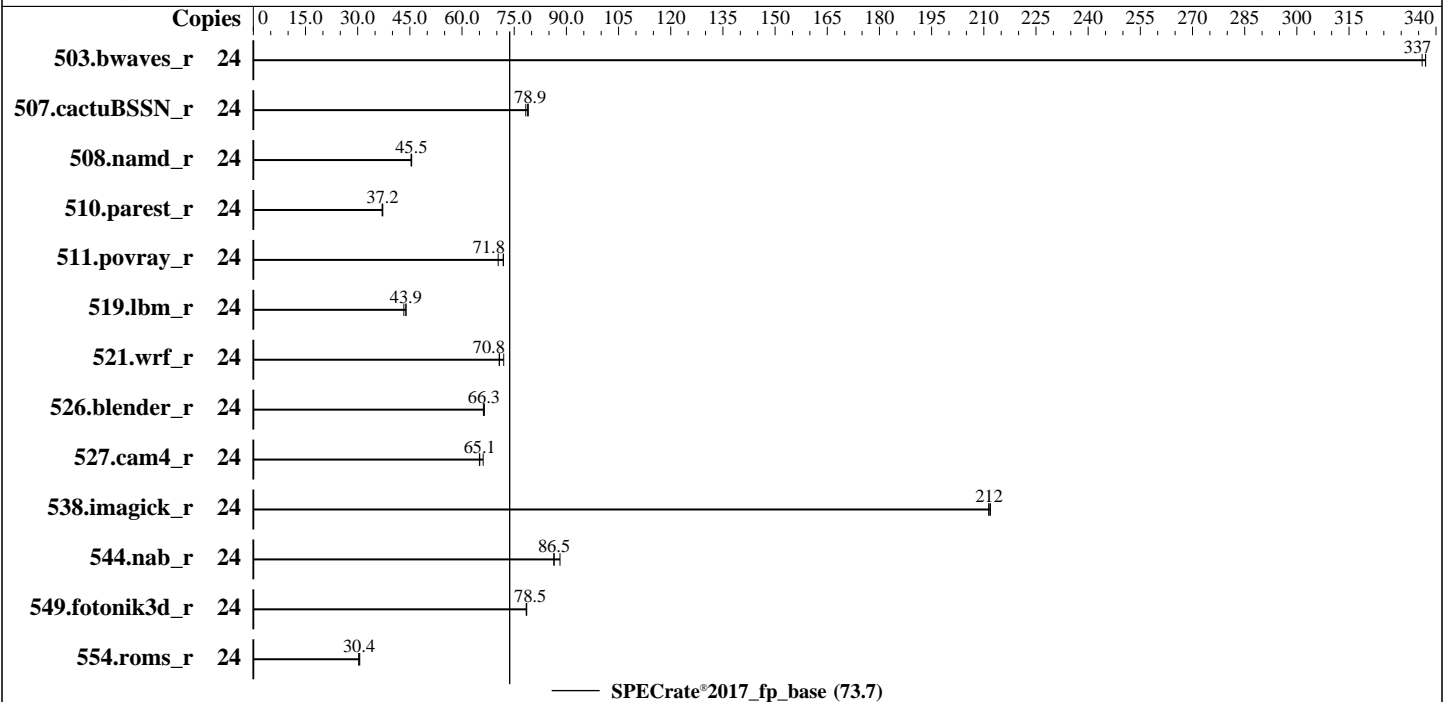

### Hardware

CPU Name: Intel Xeon E5-2620 v3  
 Max MHz: 3200  
 Nominal: 2400  
 Enabled: 12 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 15 MB I+D on chip per chip  
 Other: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R, running at 1866)  
 Storage: 1 x 300 GB SAS 15K HDD, RAID 0  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 Kernel 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version P89 v3.08 01/12/2023 released Feb-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	24	<b>714</b>	<b>337</b>	716	336	714	337							
507.cactuBSSN_r	24	<b>385</b>	<b>78.9</b>	388	78.3	384	79.0							
508.namd_r	24	503	45.3	501	45.5	<b>501</b>	<b>45.5</b>							
510.parest_r	24	1696	37.0	1688	37.2	<b>1689</b>	<b>37.2</b>							
511.povray_r	24	796	70.4	<b>780</b>	<b>71.8</b>	779	71.9							
519.lbm_r	24	576	43.9	<b>577</b>	<b>43.9</b>	584	43.3							
521.wrf_r	24	<b>760</b>	<b>70.8</b>	761	70.7	747	72.0							
526.blender_r	24	<b>551</b>	<b>66.3</b>	551	66.4	553	66.1							
527.cam4_r	24	646	65.0	<b>645</b>	<b>65.1</b>	635	66.1							
538.imagick_r	24	<b>282</b>	<b>212</b>	282	211	282	212							
544.nab_r	24	458	88.2	468	86.4	<b>467</b>	<b>86.5</b>							
549.fotonik3d_r	24	1190	78.6	1192	78.5	<b>1191</b>	<b>78.5</b>							
554.roms_r	24	1246	30.6	<b>1253</b>	<b>30.4</b>	1259	30.3							

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor.

For details, please see the config file.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>. This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

This benchmark run is conducted using the latest binaries based on IC23 and to suffice the minimum software requirement, the Operating System used is RHEL9.0

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8480+ CPU + 512GB RAM memory using Red Hat Enterprise Linux 9.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x49 for the Intel Xeon E5-2620 v3 processor.

BIOS Configuration:

Power Profile set to Custom  
Power Regulator to Static High Performance Mode  
Minimum Processor Idle Power Core C-State set to C6 State  
Minimum Processor Idle Power Package C-State set to No Package State  
QPI Snoop Configuration set to Cluster on Die  
Thermal Configuration set to Maximum Cooling  
Collaborative Power Control set to Disabled  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh  
Memory Patrol Scrubbing set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Fri May 5 15:58:50 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Failed units, from systemctl list-units --state=failed

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

- 13. Services, from `systemctl list-unit-files`
- 14. Linux kernel boot-time arguments, from `/proc/cmdline`
- 15. `cpupower frequency-info`
- 16. `tuned-adm active`
- 17. `sysctl`
- 18. `/sys/kernel/mm/transparent_hugepage`
- 19. `/sys/kernel/mm/transparent_hugepage/khugepaged`
- 20. OS release
- 21. Disk information
- 22. `/sys/devices/virtual/dmi/id`
- 23. `dmidecode`
- 24. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
15:58:50 up 1 day, 18:08, 1 user, load average: 18.44, 22.75, 23.51
USER      TTY      LOGIN@   IDLE   JCPU   PCPU   WHAT
root      pts/1    Thu10    4:58m  1.58s  0.00s  -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 514959
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 514959
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/1
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=24 -c
ic2023.0-lin-core-avx2-rate-20221201.cfg --define smt-on --define cores=12 --define physicalfirst --define
invoke_with_interleave --define drop_caches --tune base -o all fprate
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=24 --configfile
ic2023.0-lin-core-avx2-rate-20221201.cfg --define smt-on --define cores=12 --define physicalfirst --define
invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode rate
--tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 63
stepping       : 2
microcode      : 0x49
bugs           : cpu_meltdown spectre_v1 spectre_v2 spec_store_bypass l1tf mds swapsgs itlb_multihit
cpu cores      : 6
siblings       : 12
2 physical ids (chips)
24 processors (hardware threads)
physical id 0: core ids 0-5
physical id 1: core ids 0-5
physical id 0: apicids 0-11
physical id 1: apicids 16-27
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 24
On-line CPU(s) list: 0-23
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
BIOS Model name: Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
CPU family: 6
Model: 63
Thread(s) per core: 2
Core(s) per socket: 6
Socket(s): 2
Stepping: 2
BogoMIPS: 4794.38
Flags: fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat_pse36
clflush_dts_acpi_mmx_fxsr_sse_sse2_ss_ht_tm_pbe_syscall_nx_pdpelgb_rdtscp
lm_constant_tsc_arch_perfmon_pebs_bts_rep_good_nopl_xtopology_nonstop_tsc
cpuid_aperfmpperf_pni_pclmulqdq_dtes64_monitor_ds_cpl_vmx_smx_est_tm2_ssse3
sdbg_fma_cx16_xtpr_pdc_mcid_dca_sse4_1_sse4_2_x2apic_movbe_popcnt
tsc_deadline_timer_aes_xsave_avx_f16c_rdrand_lahf_lm_abm_cpuid_fault_epb
invpcid_single_pti_intel_ppin_ssbd_ibrs_ibpb_stibp_tpr_shadow_vnmi
flexpriority_ept_vpid_ept_ad_fsgsbase_tsc_adjust_bmi1_avx2_smep_bmi2_erms
invpcid_cqm_xsaveopt_cqm_llc_cqm_occup_llc_dtherm_ida_arat_pln_pts
md_clear_flush_lld
Virtualization: VT-x
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

```

L1d cache:          384 KiB (12 instances)
L1i cache:          384 KiB (12 instances)
L2 cache:           3 MiB (12 instances)
L3 cache:           30 MiB (2 instances)
NUMA node(s):       2
NUMA node0 CPU(s): 0-5,12-17
NUMA node1 CPU(s): 6-11,18-23
Vulnerability Itlb multihit: KVM: Mitigation: VMX disabled
Vulnerability L1tf:      Mitigation; PTE Inversion; VMX conditional cache flushes, SMT vulnerable
Vulnerability Mds:      Mitigation; Clear CPU buffers; SMT vulnerable
Vulnerability Meltdown: Mitigation; PTI
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP conditional, RSB
                          filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	384K	8	Data	1	64	1	64
L1i	32K	384K	8	Instruction	1	64	1	64
L2	256K	3M	8	Unified	2	512	1	64
L3	15M	30M	20	Unified	3	12288	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-5,12-17
node 0 size: 64276 MB
node 0 free: 40684 MB
node 1 cpus: 6-11,18-23
node 1 size: 64500 MB
node 1 free: 58439 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

9. /proc/meminfo

MemTotal: 131867168 kB

10. who -r

run-level 3 May 3 21:50

11. Systemd service manager version: systemd 250 (250-6.e19\_0)

```

Default Target Status
multi-user     degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* dnf-makecache.service loaded failed failed dnf makecache

```

13. Services, from systemctl list-unit-files

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronydcron dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell hwloc-dump-hwdata ipsec kvm_stat man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysextd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
indirect	

```
-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=UUID=0a5a10b9-6311-479c-8337-4f762c2bf51d
ro
resume=UUID=fd01a7f2-3350-4c31-a1e2-fb7f69bf936d
-----
```

```
-----
15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
16. tuned-adm active
  Current active profile: throughput-performance
-----
```

```
-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

### 19. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag                1
max_ptes_none        511
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000

```

### 20. OS release

```

From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

### 21. Disk information

SPEC is set to: /home/cpu2017

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda5       xfs       297G      42G   255G  15% /home

```

### 22. /sys/devices/virtual/dmi/id

```

Vendor:      HP
Product:     ProLiant DL380 Gen9
Product Family: ProLiant
Serial:      USE521R1JM

```

### 23. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400, configured at 1866

### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      HP
BIOS Version:     P89
BIOS Date:        01/12/2023
BIOS Revision:    3.0
Firmware Revision: 2.78

```

## Compiler Version Notes

```

=====
C          | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 508.namd_r(base) 510.parest_r(base)
=====

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
 507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64  
 510.parest\_r: -DSPEC\_LP64  
 511.povray\_r: -DSPEC\_LP64  
 519.lbm\_r: -DSPEC\_LP64  
 521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
 526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
 527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
 538.imagick\_r: -DSPEC\_LP64  
 544.nab\_r: -DSPEC\_LP64  
 549.fotonik3d\_r: -DSPEC\_LP64  
 554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
 -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
 -Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
 -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
 -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto  
 -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
 -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_fp\_base = 73.7

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.1-HSW-revB.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.1-HSW-revB.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-05 06:28:49-0400.

Report generated on 2023-06-06 19:14:25 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-06.