



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416


Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

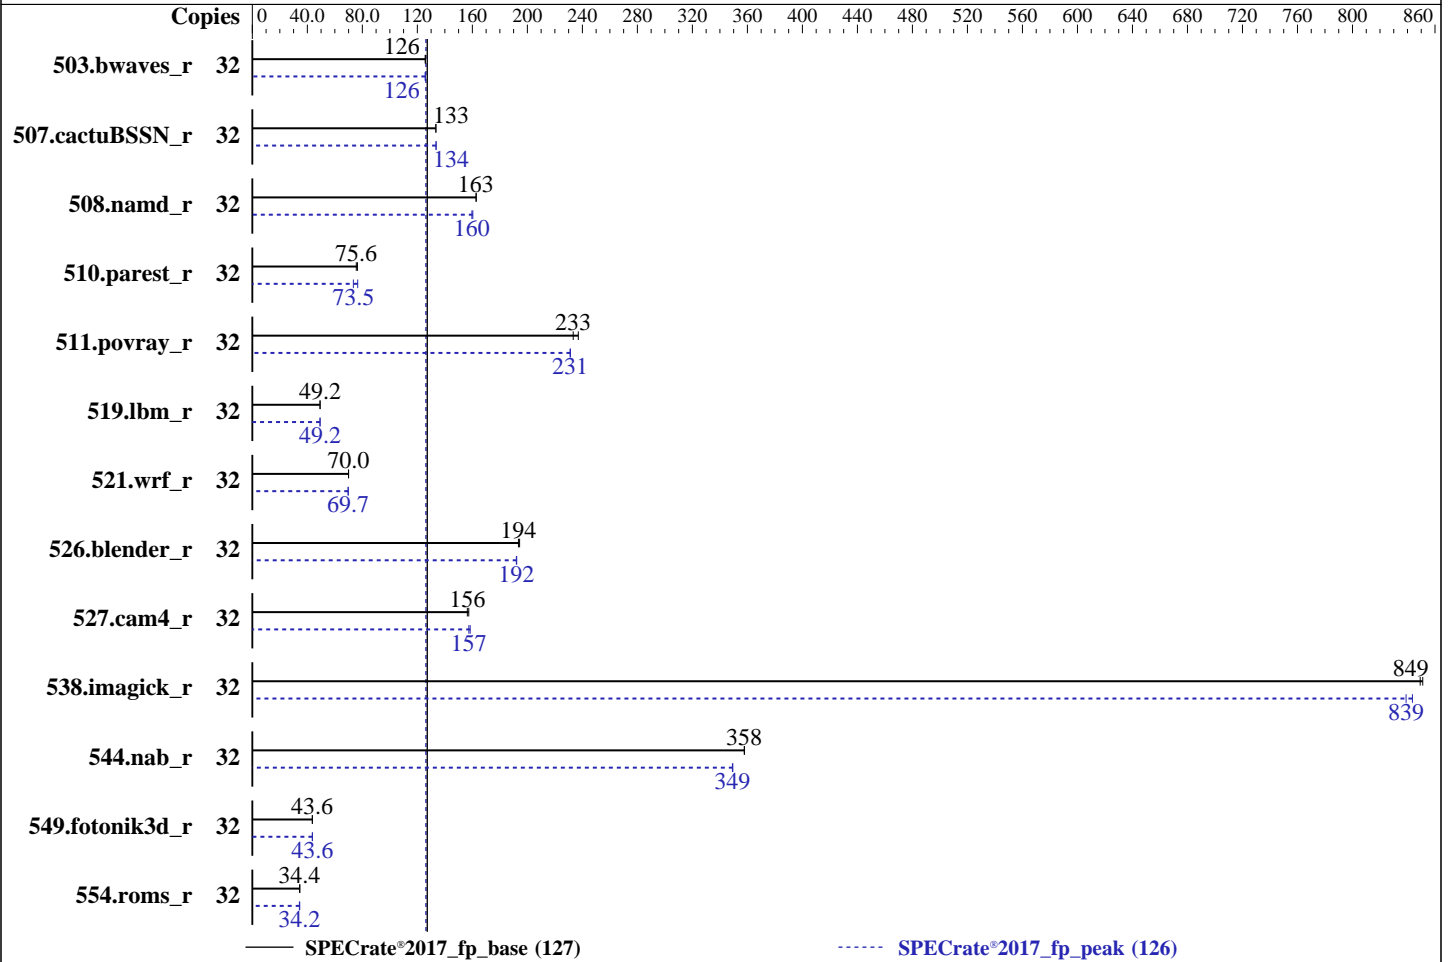

Hardware

CPU Name: AMD Ryzen 9 7950X
 Max MHz: 5700
 Nominal: 4500
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx4 PC5-5600B-R , running at 5200)

Storage: Samsung 970 EVO 500 GB NVMe M.2
 Other: None

Software

OS: Ubuntu 22.04 LTS
 kernel version 5.19.0-43-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: BIOS version L2.03 released Jan-2023
 File System: ext4
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: Default



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	2550	126	<u>2552</u>	<u>126</u>			32	<u>2553</u>	<u>126</u>	2550	126		
507.cactuBSSN_r	32	<u>304</u>	<u>133</u>	303	133			32	303	134	<u>303</u>	<u>134</u>		
508.namd_r	32	187	163	<u>187</u>	<u>163</u>			32	190	160	<u>190</u>	<u>160</u>		
510.parest_r	32	1095	76.4	<u>1107</u>	<u>75.6</u>			32	1092	76.6	<u>1140</u>	<u>73.5</u>		
511.povray_r	32	<u>320</u>	<u>233</u>	315	237			32	323	231	<u>323</u>	<u>231</u>		
519.lbm_r	32	<u>685</u>	<u>49.2</u>	685	49.3			32	685	49.3	<u>685</u>	<u>49.2</u>		
521.wrf_r	32	<u>1024</u>	<u>70.0</u>	1024	70.0			32	1028	69.8	<u>1029</u>	<u>69.7</u>		
526.blender_r	32	<u>252</u>	<u>194</u>	251	194			32	<u>254</u>	<u>192</u>	254	192		
527.cam4_r	32	<u>358</u>	<u>156</u>	356	157			32	353	158	<u>355</u>	<u>157</u>		
538.imagick_r	32	<u>93.7</u>	<u>849</u>	93.5	851			32	<u>94.9</u>	<u>839</u>	94.3	844		
544.nab_r	32	<u>151</u>	<u>358</u>	150	358			32	154	349	<u>154</u>	<u>349</u>		
549.fotonik3d_r	32	<u>2858</u>	<u>43.6</u>	2857	43.6			32	2855	43.7	<u>2857</u>	<u>43.6</u>		
554.roms_r	32	1470	34.6	<u>1480</u>	<u>34.4</u>			32	<u>1486</u>	<u>34.2</u>	1475	34.5		

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/speccpu2017/rate/amd_rate_aocc400_genoa_B_lib/lib:/speccpu2017/rate/amd_rate_aocc400_genoa_B_lib/lib
  32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings :

```
Precision Boost Overdrive : Enabled
IOMMU : Disabled
Core Performance Boost : Enabled
Global C-state Control : Disabled
Memory interleaving : Enabled
```

```
Sysinfo program /speccpu2017/rate/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on asrr-1U4LW-B650-2L2T-RPSU Wed Jun 7 17:43:58 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Platform Notes (Continued)

```

15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

-----
1. uname -a
Linux asrr-1U4LW-B650-2L2T-RPSU 5.19.0-43-generic #44~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Mon May 22
13:39:36 UTC 2 x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
17:43:58 up 1 day, 2:57, 3 users, load average: 23.21, 29.75, 30.85
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
asrr      :0        :0              Tue14   ?xdm? 26:39  0.00s /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
asrr      pts/1    192.168.30.120  14:24   3:16m 0.04s  0.04s -bash
asrr      pts/2    -                14:26   3:17m 0.86s  0.00s sudo ./run_amd_rate_aocc400_genoa_B1.py

```

```

-----
3. Username
From environment variable $USER:  root
From the command 'logname':      asrr

```

```

-----
4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                253632
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

```

```

-----
5. sysinfo process ancestry
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo ./run_amd_rate_aocc400_genoa_B1.py
sudo ./run_amd_rate_aocc400_genoa_B1.py
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 1 fprate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 1 --nopower --runmode
rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/tempslogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /speccpu2017/rate

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Platform Notes (Continued)

```

-----
6. /proc/cpuinfo
model name      : AMD Ryzen 9 7950X 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 97
stepping       : 2
microcode      : 0xa601203
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 16
siblings       : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-31

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          48 bits physical, 48 bits virtual
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Vendor ID:              AuthenticAMD
Model name:             AMD Ryzen 9 7950X 16-Core Processor
CPU family:             25
Model:                  97
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              1
Stepping:               2
Frequency boost:        enabled
CPU max MHz:            5879.8818
CPU min MHz:            3000.0000
BogoMIPS:               8999.59
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes
                        xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
                        misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core
                        perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba
                        perfmon_v2 ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                        cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx512_bf16 clzero
                        irperf xsaveerptr rdpru wbnoinvd cppc arat npt lbrv svm_lock nrip_save
                        tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
                        avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:        AMD-V
L1d cache:             512 KiB (16 instances)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416
Test Sponsor: ASRock Rack Inc.
Tested by: ASRock Rack Inc.

Test Date: Jun-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Platform Notes (Continued)

```

L1i cache:          512 KiB (16 instances)
L2 cache:          16 MiB (16 instances)
L3 cache:          64 MiB (2 instances)
NUMA node(s):      1
NUMA node0 CPU(s): 0-31
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                        filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	512K	8	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	8	Unified	2	2048	1	64
L3	32M	64M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 63485 MB
node 0 free: 61258 MB
node distances:
node 0
0: 10

```

9. /proc/meminfo

MemTotal: 65009468 kB

10. who -r

run-level 5 Jun 6 14:47

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)

```

Default Target Status
graphical      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT                                LOAD ACTIVE SUB    DESCRIPTION
* fwupd-refresh.service             loaded failed failed Refresh fwupd metadata and update motd
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

```

13. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon anacron apparmor avahi-daemon bluetooth console-setup cron cups

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Platform Notes (Continued)

```

cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon
rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oomd systemd-pstore
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds udisks2 ufw unattended-upgrades
wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled acpid brltty console-getty debug-shell ipmievd nftables openvpn-client@ openvpn-server@
openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd
systemd-boot-check-no-failures systemd-network-generator systemd-networkd
systemd-networkd-wait-online systemd-sysextd systemd-time-wait-sync upower
wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated apport openipmi speech-dispatcher
indirect saned@ spice-vdagentd uuidd
masked alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
sudo x11-common

```

14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.19.0-43-generic
root=UUID=690a6797-4d9b-40f1-b6da-cfd371352ad4
ro
quiet
splash
vt.handoff=7

```

15. sysctl

```

kernel.numa_balancing          0
kernel.randomize_va_space     0
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

16. /sys/kernel/mm/transparent_hugepage

```

defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416
Test Sponsor: ASRock Rack Inc.
Tested by: ASRock Rack Inc.

Test Date: Jun-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Platform Notes (Continued)

```
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04 LTS

19. Disk information
SPEC is set to: /speccpu2017/rate
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4 457G 35G 399G 9% /

20. /sys/devices/virtual/dmi/id
Vendor: ASRockRack
Product: 1U4LW-B650/2L2T RPSU
Serial: DCS0R8000088

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
2x SK Hynix HMC88AGB081N 32 GB 2 rank 5600, configured at 5200
2x Unknown Unknown

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 2.03
BIOS Date: 01/30/2023
BIOS Revision: 5.26

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-zopt -lamdlibm -lamdalloc -lflang
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-inline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -inline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fininline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Peak Optimization Flags (Continued)

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang
```

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang
```

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

```
527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Peak Optimization Flags (Continued)

527.cam4_r (continued):

```
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc
```

```
526.blender_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-finline-aggressive -mllvm -unroll-threshold=100 -lamdlibm
-lamdalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -faggressive-loop-transform -fvectors-transform
-fscalar-transform -Mrecursive -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = 126

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

http://www.spec.org/cpu2017/flags/ASRockRack_platform_amd_speed_aocc400_genoa_B.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

http://www.spec.org/cpu2017/flags/ASRockRack_platform_amd_speed_aocc400_genoa_B.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-07 05:43:57-0400.

Report generated on 2023-07-13 16:23:43 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-13.