



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(1.80 GHz, Intel Xeon Platinum 8471N)

SPECSpeed®2017_int_base = 14.3

SPECSpeed®2017_int_peak = 14.6

CPU2017 License: 9016


Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

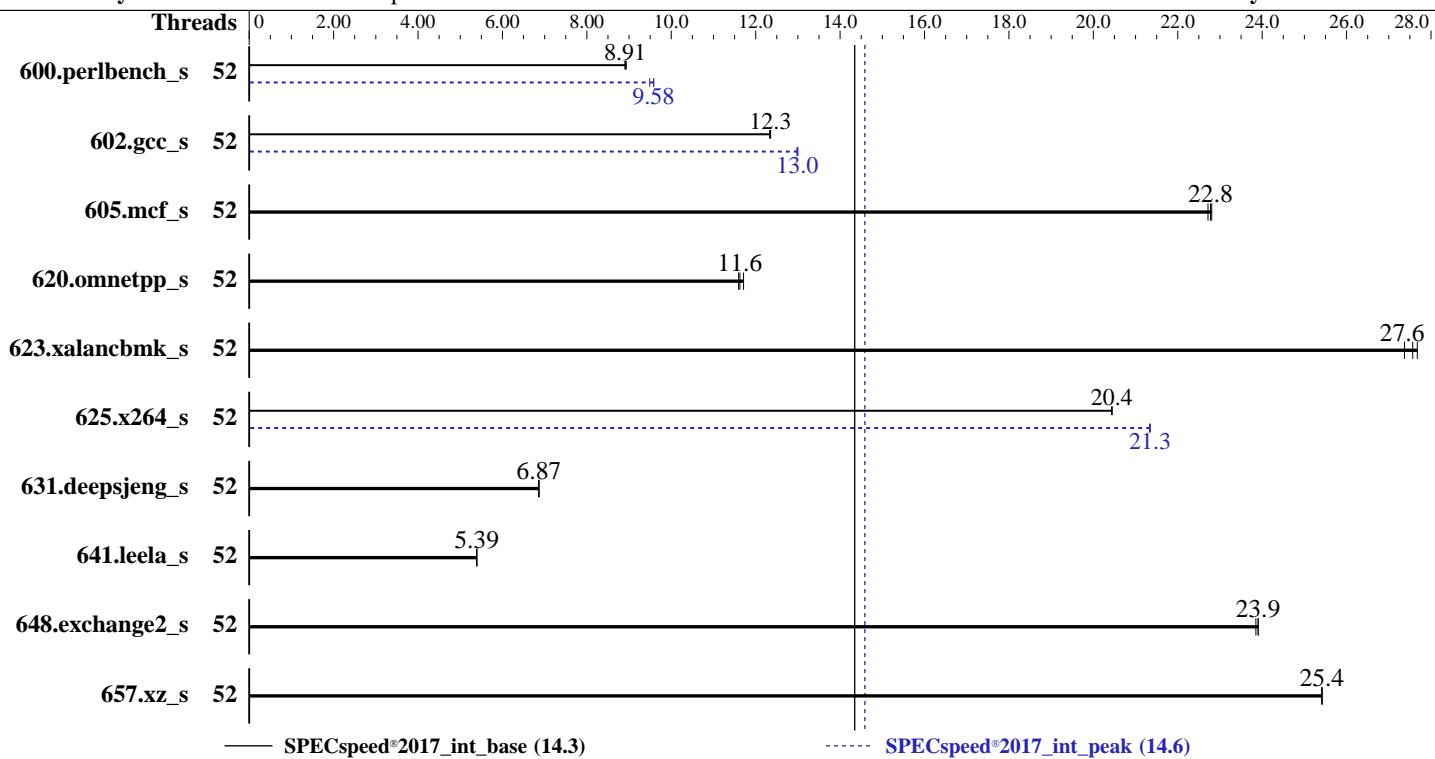

Hardware

CPU Name: Intel Xeon Platinum 8471N
Max MHz: 3600
Nominal: 1800
Enabled: 52 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 97.5 MB I+D on chip per chip
Other: None
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 1.6 TB PCIe NVMe SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
Compiler: Kernel 5.14.21-150400.22-default
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version 0701 released May-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(1.80 GHz, Intel Xeon Platinum 8471N)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 9016

Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------------------------------|---------|------------|-------------|-------------|-------------|------------|-------------|---------|------------|-------------|-------------|-------------|------------|-------------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 52 | 199 | 8.91 | 199 | 8.93 | 199 | 8.91 | 52 | 187 | 9.49 | 185 | 9.58 | 185 | 9.58 |
| 602.gcc_s | 52 | 322 | 12.4 | 323 | 12.3 | 322 | 12.3 | 52 | 306 | 13.0 | 306 | 13.0 | 307 | 13.0 |
| 605.mcf_s | 52 | 207 | 22.8 | 208 | 22.7 | 207 | 22.8 | 52 | 207 | 22.8 | 208 | 22.7 | 207 | 22.8 |
| 620.omnetpp_s | 52 | 139 | 11.7 | 141 | 11.6 | 140 | 11.6 | 52 | 139 | 11.7 | 141 | 11.6 | 140 | 11.6 |
| 623.xalancbmk_s | 52 | 51.8 | 27.4 | 51.4 | 27.6 | 51.2 | 27.7 | 52 | 51.8 | 27.4 | 51.4 | 27.6 | 51.2 | 27.7 |
| 625.x264_s | 52 | 86.3 | 20.4 | 86.3 | 20.4 | 86.3 | 20.4 | 52 | 82.7 | 21.3 | 82.6 | 21.3 | 82.6 | 21.3 |
| 631.deepsjeng_s | 52 | 209 | 6.87 | 209 | 6.86 | 209 | 6.87 | 52 | 209 | 6.87 | 209 | 6.86 | 209 | 6.87 |
| 641.leela_s | 52 | 316 | 5.39 | 316 | 5.39 | 316 | 5.39 | 52 | 316 | 5.39 | 316 | 5.39 | 316 | 5.39 |
| 648.exchange2_s | 52 | 123 | 23.9 | 123 | 23.9 | 123 | 23.9 | 52 | 123 | 23.9 | 123 | 23.9 | 123 | 23.9 |
| 657.xz_s | 52 | 243 | 25.4 | 243 | 25.4 | 243 | 25.4 | 52 | 243 | 25.4 | 243 | 25.4 | 243 | 25.4 |
| SPECspeed®2017_int_base = 14.3 | | | | | | | | | | | | | | |
| SPECspeed®2017_int_peak = 14.6 | | | | | | | | | | | | | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
 KMP_AFFINITY = "granularity=fine,scatter"
 LD_LIBRARY_PATH = "/cpull9/lib/intel64:/cpull9/je5.0.1-64"
 MALLOC_CONF = "retain:true"
 OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(1.80 GHz, Intel Xeon Platinum 8471N)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 9016

Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

Hyper-Threading = Disable

Engine Boost = Aggressive

SR-IOV Support = Disabled

SNC = Enable SNC2 (2-clusters)

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /cpull9/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Jun 8 00:28:28 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
- -----

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(1.80 GHz, Intel Xeon Platinum 8471N)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 9016

Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

-----
2. w
00:28:28 up 10:03,  2 users,  load average: 5.89, 5.56, 3.34
USER      TTY      FROM             LOGIN@     IDLE    JCPU      PCPU WHAT
root      tty1      -           14:25   10:03m  0.86s  0.00s /bin/bash ./speed.sh
root      tty2      -           14:25    6:41m  0.04s  0.04s -bash

-----
3. Username
From environment variable $USER: root

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 2062585
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 2062585
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./speed.sh
/bin/bash ./speed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=52 --tune base,peak -o all --define
  intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=52 --tune base,peak --output_format all
  --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
  intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.466/templogs/preenv.intspeed.466.0.log
  --lognum 466.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpu119

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8471N
vendor_id       : GenuineIntel
cpu family      : 6
model          : 143
stepping        : 8
microcode       : 0x2b000461
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(1.80 GHz, Intel Xeon Platinum 8471N)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 9016

Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores    : 52
siblings     : 52
1 physical ids (chips)
52 processors (hardware threads)
physical id 0: core ids 0-51
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 52
On-line CPU(s) list:   0-51
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Platinum 8471N
CPU family:              6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    52
Socket(s):              1
Stepping:               8
CPU max MHz:            3600.0000
CPU min MHz:            800.0000
BogoMIPS:                3600.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperf fmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                       lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                        invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpocndq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
                        flush_ll1d arch_capabilities
Virtualization:          VT-x
L1d cache:                2.4 MiB (52 instances)
L1i cache:                1.6 MiB (52 instances)
L2 cache:                 104 MiB (52 instances)
L3 cache:                 97.5 MiB (1 instance)
NUMA node(s):              2
NUMA node0 CPU(s):        0-25
NUMA node1 CPU(s):        26-51
Vulnerability Itlb multihit: Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(1.80 GHz, Intel Xeon Platinum 8471N)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 9016

Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

| | |
|----------------------------------|----------------------------------------------------------------------|
| Vulnerability Llftf: | Not affected |
| Vulnerability Mds: | Not affected |
| Vulnerability Meltdown: | Not affected |
| Vulnerability Spec store bypass: | Mitigation; Speculative Store Bypass disabled via prctl and seccomp |
| Vulnerability Spectre v1: | Mitigation; usercopy/swapgs barriers and __user pointer sanitization |
| Vulnerability Spectre v2: | Mitigation; Enhanced IBRS, IBPB conditional, RSB filling |
| Vulnerability Srbds: | Not affected |
| Vulnerability Tsx async abort: | Not affected |

From lscpu --cache:

| | | | | | | | | |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
| L1d | 48K | 2.4M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 1.6M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 104M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 97.5M | 97.5M | 15 | Unified | 3 | 106496 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

| | |
|-----------------|---------------|
| available: | 2 nodes (0-1) |
| node 0 cpus: | 0-25 |
| node 0 size: | 257683 MB |
| node 0 free: | 257088 MB |
| node 1 cpus: | 26-51 |
| node 1 size: | 257987 MB |
| node 1 free: | 256599 MB |
| node distances: | |
| node 0 1 | |
| 0: | 10 12 |
| 1: | 12 10 |

9. /proc/meminfo

| | |
|-----------|--------------|
| MemTotal: | 528046352 kB |
|-----------|--------------|

10. who -r

| | |
|-------------|-------------|
| run-level 3 | Jun 7 14:24 |
|-------------|-------------|

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

| | |
|----------------|---------|
| Default Target | Status |
| multi-user | running |

12. Services, from systemctl list-unit-files

| | |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| STATE | UNIT FILES |
| enabled | YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny |
| enabled-runtime | systemd-remount-fs |
| disabled | autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievfd issue-add-ssh-keys kexec-load lummask man-db-create multipathd nfs nfs-blkmap nvvmf-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 |
| indirect | wickedd |

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(1.80 GHz, Intel Xeon Platinum 8471N)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 9016

Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=1821a225-9785-4821-9a33-99bd3ded8cae
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.60 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer+madvise [madvise] never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(1.80 GHz, Intel Xeon Platinum 8471N)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 9016

Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

19. Disk information

```
SPEC is set to: /cpul19
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p8  xfs   1.3T  23G  1.2T  2%  /
```

20. /sys/devices/virtual/dmi/id

```
Vendor:          ASUSTeK COMPUTER INC.
Product:         RS720-E11-RS12U
Product Family:  Server
Serial:          R1S0MD000002
```

21. dmidecode

```
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
```

Memory:

```
8x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800
```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      American Megatrends Inc.
BIOS Version:    0701
BIOS Date:       05/02/2023
BIOS Revision:   7.1
```

Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====
```

```
=====
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran | 648.exchange2_s(base, peak)
=====
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(1.80 GHz, Intel Xeon Platinum 8471N)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 9016

Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-finite-math-only
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-fno-finite-math-only -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-finite-math-only
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-standard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(1.80 GHz, Intel Xeon Platinum 8471N)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 9016

Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(1.80 GHz, Intel Xeon Platinum 8471N)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 9016

Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-07 12:28:28-0400.

Report generated on 2024-01-29 17:55:39 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.