# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.20 GHz, AMD EPYC 9734)

**SPECspeed®2017_int_base = 10.9**

**SPECspeed®2017_int_peak = 11.1**

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Jun-2023
**Hardware Availability:** Sep-2023
**Software Availability:** Apr-2023

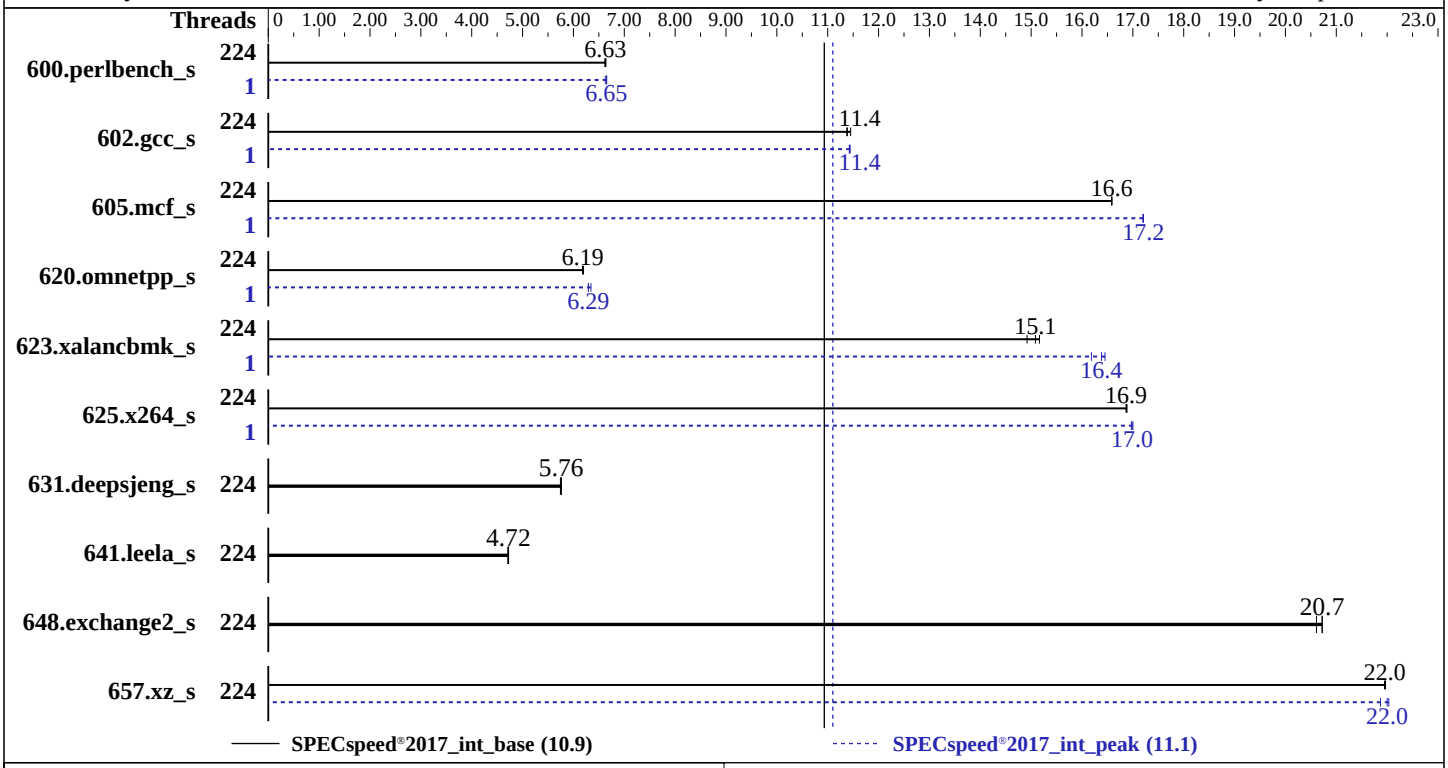


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 9734 |
| Max MHz: | 3000 |
| Nominal: | 2200 |
| Enabled: | 224 cores, 2 chips |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 256 MB I+D on chip per chip, 16 MB shared / 7 cores |
| Other: | None |
| Memory: | 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R) |
| Storage: | 1 x 960 GB SATA SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 9.0 (Plow)<br>Kernel 5.14.0-70.13.1.el9_0.x86_64 |
| Compiler: | C/C++/Fortran: Version 4.0.0 of AOCC |
| Parallel: | Yes |
| Firmware: | HPE BIOS Version v1.30 03/06/2023 released Mar-2023 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | None |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL365 Gen11
(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.1

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Jun-2023
**Hardware Availability:** Sep-2023
**Software Availability:** Apr-2023

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 224 | **268** | **6.63** | 268 | 6.62 | 267 | 6.64 | 1 | **267** | **6.65** | 268 | 6.63 | 267 | 6.65 |
| 602.gcc_s | 224 | 348 | 11.5 | **350** | **11.4** | 350 | 11.4 | 1 | **348** | **11.4** | 348 | 11.4 | 349 | 11.4 |
| 605.mcf_s | 224 | **285** | **16.6** | 285 | 16.6 | 285 | 16.6 | 1 | 275 | 17.2 | **274** | **17.2** | 274 | 17.2 |
| 620.omnetpp_s | 224 | 263 | 6.20 | **264** | **6.19** | 264 | 6.18 | 1 | 257 | 6.35 | **259** | **6.29** | 259 | 6.29 |
| 623.xalancbmk_s | 224 | 93.4 | 15.2 | **93.9** | **15.1** | 95.0 | 14.9 | 1 | 86.1 | 16.5 | 87.5 | 16.2 | **86.5** | **16.4** |
| 625.x264_s | 224 | 104 | 16.9 | **105** | **16.9** | 105 | 16.9 | 1 | 104 | 17.0 | **104** | **17.0** | 104 | 17.0 |
| 631.deepsjeng_s | 224 | **249** | **5.76** | 249 | 5.76 | 249 | 5.74 | 224 | **249** | **5.76** | 249 | 5.76 | 249 | 5.74 |
| 641.leela_s | 224 | 361 | 4.73 | **361** | **4.72** | 362 | 4.71 | 224 | 361 | 4.73 | **361** | **4.72** | 362 | 4.71 |
| 648.exchange2_s | 224 | 142 | 20.7 | 143 | 20.6 | **142** | **20.7** | 224 | 142 | 20.7 | 143 | 20.6 | **142** | **20.7** |
| 657.xz_s | 224 | 281 | 22.0 | 282 | 21.9 | **282** | **22.0** | 224 | 283 | 21.9 | 281 | 22.0 | **281** | **22.0** |

**SPECspeed®2017_int_base =** **10.9**

**SPECspeed®2017_int_peak =** **11.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-223"
LD_LIBRARY_PATH = "/home/new_cpu2017/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "224"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-223"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS Configuration
 Workload Profile set to General Peak Frequency Compute
 AMD SMT Option set to Disabled
 Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 NUMA memory domains per socket set to Four memory domains per socket
 ACPI CST C2 Latency set to 18 microseconds
 Thermal Configuration set to Maximum Cooling
 Workload Profile set to Custom
   Power Regulator set to OS Control Mode
```

**(Continued on next page)**

## Platform Notes (Continued)

```
Sysinfo program /home/new_cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Jun 30 18:40:06 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   18:40:06 up 1 min,  0 users,  load average: 0.30, 0.15, 0.06
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 6191103
  max locked memory           (kbytes, -l) 2097152
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   pipe size               (512 bytes, -p) 8
   POSIX message queues         (bytes, -q) 819200
   real-time priority                   (-r) 0
   stack size                (kbytes, -s) unlimited
   cpu time                  (seconds, -t) unlimited
   max user processes                   (-u) 6191103
   virtual memory             (kbytes, -v) unlimited
   file locks                           (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 bash -c cd $SPEC/ && $SPEC/intspeed.sh
 python3 ./run_intspeed.py
 /bin/bash ./amd_speed_aocc400_znver4_A1.sh
 runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeed
 runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/new_cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9734 112-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 160
    stepping        : 2
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 112
    siblings        : 112
    2 physical ids (chips)
    224 processors (hardware threads)
    physical id 0: core ids
    0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
    240-246
    physical id 1: core ids
    0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
    240-246
    physical id 0: apicids
    0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
    240-246
    physical id 1: apicids
    256-262,272-278,288-294,304-310,320-326,336-342,352-358,368-374,384-390,400-406,416-422,432-438,448-454,4
    64-470,480-486,496-502
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
```

**(Continued on next page)**

## Platform Notes (Continued)

```
Byte Order:                      Little Endian
CPU(s):                          224
On-line CPU(s) list:             0-223
Vendor ID:                       AuthenticAMD
BIOS Vendor ID:                  Advanced Micro Devices, Inc.
Model name:                      AMD EPYC 9734 112-Core Processor
BIOS Model name:                 AMD EPYC 9734 112-Core Processor
CPU family:                      25
Model:                           160
Thread(s) per core:              1
Core(s) per socket:              112
Socket(s):                       2
Stepping:                        2
Frequency boost:                 enabled
CPU max MHz:                     2200.0000
CPU min MHz:                     1500.0000
BogoMIPS:                        4393.40
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                 constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                 pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                 popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                 abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                 perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                 avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                 xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                 avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                                 svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                 pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                 umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                 avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:                  AMD-V
L1d cache:                       7 MiB (224 instances)
L1i cache:                       7 MiB (224 instances)
L2 cache:                        224 MiB (224 instances)
L3 cache:                        512 MiB (32 instances)
NUMA node(s):                    32
NUMA node0 CPU(s):               0-6
NUMA node1 CPU(s):               7-13
NUMA node2 CPU(s):               56-62
NUMA node3 CPU(s):               63-69
NUMA node4 CPU(s):               28-34
NUMA node5 CPU(s):               35-41
NUMA node6 CPU(s):               84-90
NUMA node7 CPU(s):               91-97
NUMA node8 CPU(s):               42-48
NUMA node9 CPU(s):               49-55
NUMA node10 CPU(s):              98-104
NUMA node11 CPU(s):              105-111
NUMA node12 CPU(s):              14-20
NUMA node13 CPU(s):              21-27
NUMA node14 CPU(s):              70-76
NUMA node15 CPU(s):              77-83
NUMA node16 CPU(s):              112-118
NUMA node17 CPU(s):              119-125
NUMA node18 CPU(s):              168-174
NUMA node19 CPU(s):              175-181
NUMA node20 CPU(s):              140-146
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  NUMA node21 CPU(s):              147-153
  NUMA node22 CPU(s):              196-202
  NUMA node23 CPU(s):              203-209
  NUMA node24 CPU(s):              154-160
  NUMA node25 CPU(s):              161-167
  NUMA node26 CPU(s):              210-216
  NUMA node27 CPU(s):              217-223
  NUMA node28 CPU(s):              126-132
  NUMA node29 CPU(s):              133-139
  NUMA node30 CPU(s):              182-188
  NUMA node31 CPU(s):              189-195
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                   filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       7M    8 Data            1    64        1             64
     L1i       32K       7M    8 Instruction     1    64        1             64
     L2         1M     224M    8 Unified         2  2048        1             64
     L3        16M     512M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 32 nodes (0-31)
  node 0 cpus: 0-6
  node 0 size: 48136 MB
  node 0 free: 47955 MB
  node 1 cpus: 7-13
  node 1 size: 48382 MB
  node 1 free: 48303 MB
  node 2 cpus: 56-62
  node 2 size: 48382 MB
  node 2 free: 48242 MB
  node 3 cpus: 63-69
  node 3 size: 48382 MB
  node 3 free: 48266 MB
  node 4 cpus: 28-34
  node 4 size: 48382 MB
  node 4 free: 48241 MB
  node 5 cpus: 35-41
  node 5 size: 48382 MB
  node 5 free: 48217 MB
  node 6 cpus: 84-90
  node 6 size: 48382 MB
  node 6 free: 48231 MB
  node 7 cpus: 91-97
  node 7 size: 48382 MB
  node 7 free: 48235 MB
  node 8 cpus: 42-48
  node 8 size: 48345 MB
  node 8 free: 48146 MB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
node 9 cpus: 49-55
node 9 size: 48382 MB
node 9 free: 48080 MB
node 10 cpus: 98-104
node 10 size: 48382 MB
node 10 free: 48089 MB
node 11 cpus: 105-111
node 11 size: 48382 MB
node 11 free: 47820 MB
node 12 cpus: 14-20
node 12 size: 48382 MB
node 12 free: 48228 MB
node 13 cpus: 21-27
node 13 size: 48382 MB
node 13 free: 48232 MB
node 14 cpus: 70-76
node 14 size: 48382 MB
node 14 free: 48225 MB
node 15 cpus: 77-83
node 15 size: 48382 MB
node 15 free: 48253 MB
node 16 cpus: 112-118
node 16 size: 48382 MB
node 16 free: 48248 MB
node 17 cpus: 119-125
node 17 size: 48382 MB
node 17 free: 48236 MB
node 18 cpus: 168-174
node 18 size: 48382 MB
node 18 free: 48308 MB
node 19 cpus: 175-181
node 19 size: 48382 MB
node 19 free: 48231 MB
node 20 cpus: 140-146
node 20 size: 48382 MB
node 20 free: 48238 MB
node 21 cpus: 147-153
node 21 size: 48382 MB
node 21 free: 48248 MB
node 22 cpus: 196-202
node 22 size: 48382 MB
node 22 free: 48244 MB
node 23 cpus: 203-209
node 23 size: 48382 MB
node 23 free: 48232 MB
node 24 cpus: 154-160
node 24 size: 48382 MB
node 24 free: 48204 MB
node 25 cpus: 161-167
node 25 size: 48382 MB
node 25 free: 48219 MB
node 26 cpus: 210-216
node 26 size: 48382 MB
node 26 free: 48203 MB
node 27 cpus: 217-223
node 27 size: 48382 MB
node 27 free: 48027 MB
node 28 cpus: 126-132
node 28 size: 48382 MB
node 28 free: 48229 MB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
node 29 cpus: 133-139
node 29 size: 48382 MB
node 29 free: 48243 MB
node 30 cpus: 182-188
node 30 size: 48382 MB
node 30 free: 48239 MB
node 31 cpus: 189-195
node 31 size: 48309 MB
node 31 free: 48138 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
25  26  27  28  29  30  31
  0:  10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  1:  11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  2:  11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  3:  11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  4:  12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  5:  12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  6:  12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  7:  12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  8:  12  12  12  12  12  12  12  12  10  11  11  11  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
  9:  12  12  12  12  12  12  12  12  11  10  11  11  12  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32  32  32  32  32
 10:  12  12  12  12  12  12  12  12  11  11  10  11  12  12  12  12  32  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 11:  12  12  12  12  12  12  12  12  11  11  11  10  12  12  12  12  32  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 12:  12  12  12  12  12  12  12  12  12  12  12  12  10  11  11  11  32  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 13:  12  12  12  12  12  12  12  12  12  12  12  12  11  10  11  11  32  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 14:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  10  11  32  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 15:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  11  10  32  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 16:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  11  12  12  12  12  12
 12  12  12  12  12  12  12
 17:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  11  12  12  12  12  12
 12  12  12  12  12  12  12
 18:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  11  12  12  12  12  12
 12  12  12  12  12  12  12
 19:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  10  12  12  12  12  12
 12  12  12  12  12  12  12
 20:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  10  11  11  11  12
 12  12  12  12  12  12  12
 21:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  10  11  11  12
 12  12  12  12  12  12  12
 22:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  11  10  11  12
 12  12  12  12  12  12  12
 23:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  11  11  10  12
 12  12  12  12  12  12  12
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    24:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  10
    11  11  11  12  12  12  12
    25:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
    10  11  11  12  12  12  12
    26:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
    11  10  11  12  12  12  12
    27:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
    11  11  10  12  12  12  12
    28:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
    12  12  12  10  11  11  11
    29:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
    12  12  12  11  10  11  11
    30:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
    12  12  12  11  11  10  11
    31:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
    12  12  12  11  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1585029256 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jun 30 18:38

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
                   dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                   nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                   systemd-network-generator tuned udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower debug-shell
                   hwloc-dump-hwdata kvm_stat man-db-restart-cache-update nftables rdisc rhsm rhsm-facts
                   rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore
                   systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.20 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     boost state support:
       Supported: yes
       Active: yes
       Boost States: 0
       Total States: 3
       Pstate-P0:  2200MHz

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                     8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/new_cpu2017
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   372G   21G  352G   6% /home

 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:         HPE
     Product:        ProLiant DL365 Gen11
     Product Family: ProLiant
     Serial:         DL365G11-003

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     18x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800
     5x Hynix HMCG94MEBRA121N 64 GB 2 rank 4800
     1x Hynix HMCG94MEBRA123N 64 GB 2 rank 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      1.30
    BIOS Date:         03/06/2023
    BIOS Revision:     1.30
    Firmware Revision: 1.40
```

## Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

## Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4

**(Continued on next page)**

## Base Optimization Flags (Continued)

C++ benchmarks (continued):
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

## Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -z muldefs -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

605.mcf_s: Same as 600.perlbench_s

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

**(Continued on next page)**

## Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

## Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.html
http://www.spec.org/cpu2017/flags/aocc400-flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.xml
http://www.spec.org/cpu2017/flags/aocc400-flags.xml


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-30 09:10:05-0400.
Report generated on 2023-07-19 16:28:32 by CPU2017 PS formatter v6716.
Originally published on 2023-07-19.