SPEC CPU®2017 Floating Point Rate Result

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 1640

SPECrate®2017_fp_peak = Not Run

CPU2017 License:	19	**Test Date:**	Jul-2023
Test Sponsor:	Fujitsu	**Hardware Availability:**	Sep-2023
Tested by:	Fujitsu	**Software Availability:**	Dec-2022

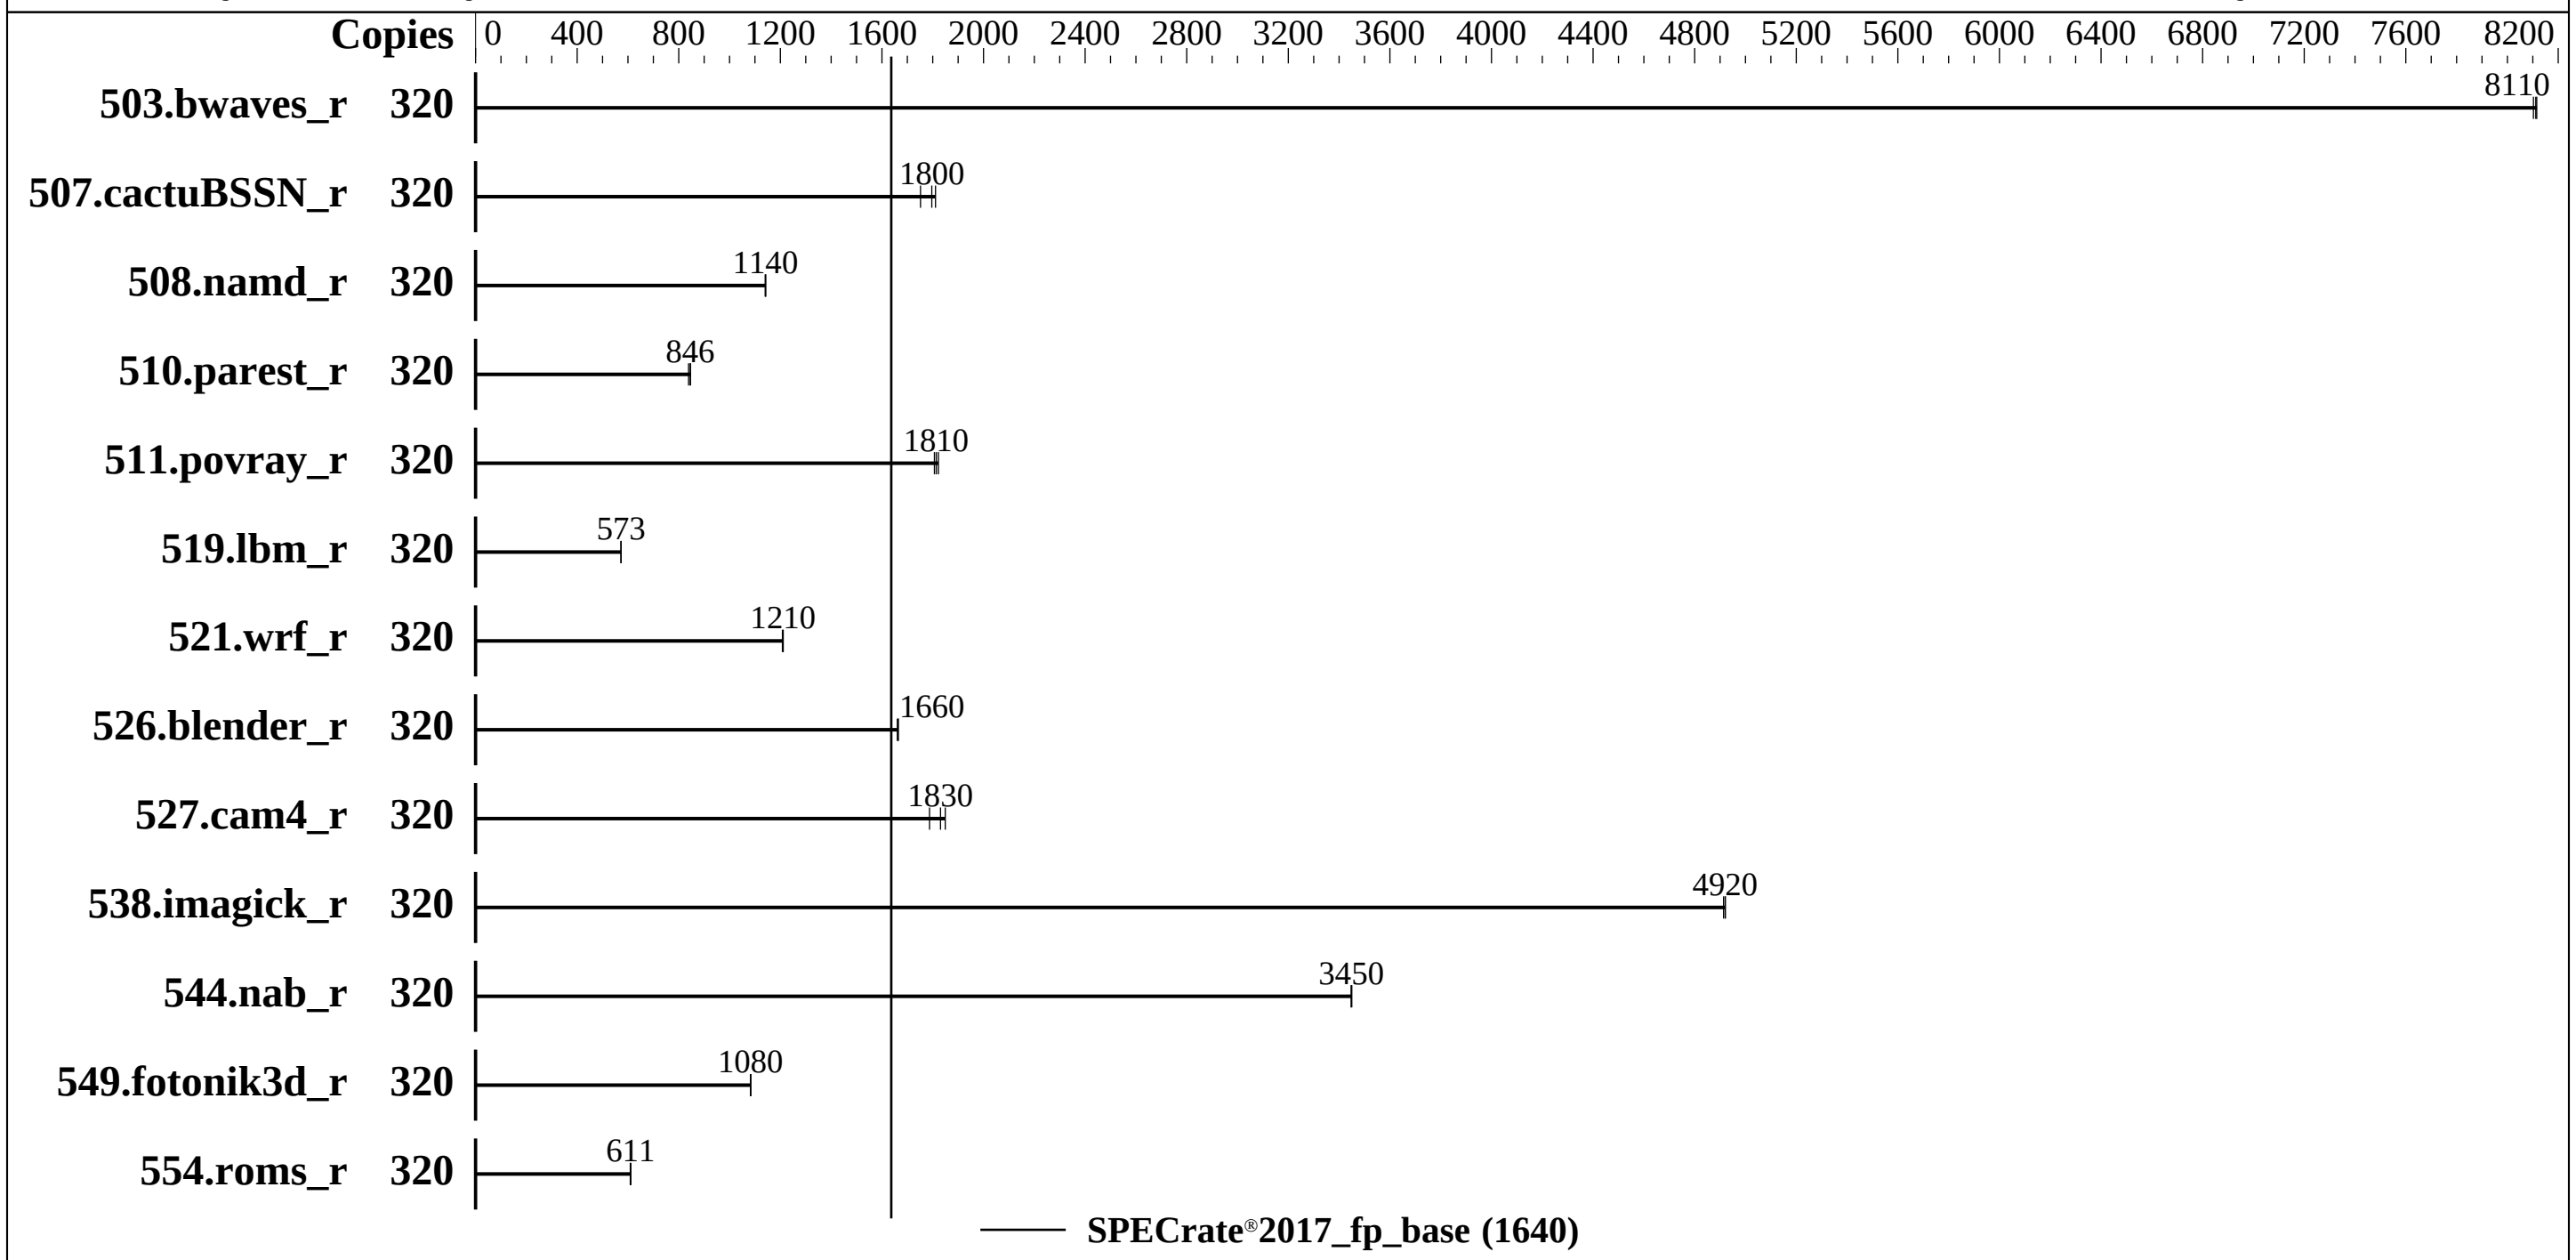

Hardware

CPU Name:	Intel Xeon Platinum 8460H
Max MHz:	3800
Nominal:	2200
Enabled:	160 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 1.92 TB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Fujitsu BIOS Version V1.0.0.0 R1.10.0 for D3986-A1x. Released Sep-2023 tested as V1.0.0.0 R1.0.0 for D3986-A1x May-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost ofadditional power usage

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 1640

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu
Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	320	395	8120	396	8100	**396**	**8110**							
507.cactuBSSN_r	320	231	1750	224	1810	**226**	**1800**							
508.namd_r	320	267	1140	266	1140	**266**	**1140**							
510.parest_r	320	989	846	**990**	**846**	998	839							
511.povray_r	320	**412**	**1810**	410	1820	414	1810							
519.lbm_r	320	589	573	**589**	**573**	589	573							
521.wrf_r	320	593	1210	**592**	**1210**	592	1210							
526.blender_r	320	293	1660	293	1660	**293**	**1660**							
527.cam4_r	320	303	1850	313	1790	**306**	**1830**							
538.imagick_r	320	162	4910	**162**	**4920**	162	4920							
544.nab_r	320	**156**	**3450**	156	3450	156	3450							
549.fotonik3d_r	320	1151	1080	**1152**	**1080**	1152	1080							
554.roms_r	320	**832**	**611**	832	611	835	609							

SPECrate®2017_fp_base = 1640

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu/lib/intel64:/home/Benchmark/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Package C State limit = C0
CPU Performance Boost = Aggressive
SNC (Sub NUMA) = Enable SNC4
FAN Control = Full

Sysinfo program /home/Benchmark/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Jul  4 18:13:01 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   18:13:01 up 3 min,  1 user,  load average: 4.08, 10.81, 5.42
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                18:11   13.00s  2.34s  0.31s -bash
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 8253657
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 8253657
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=320 -c
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=160 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=320 --configfile
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=160 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
   rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8460H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 6
    microcode       : 0x2b0001b0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 40
    siblings        : 80
    4 physical ids (chips)
    320 processors (hardware threads)
    physical id 0: core ids 0-39
    physical id 1: core ids 0-39
    physical id 2: core ids 0-39
    physical id 3: core ids 0-39
    physical id 0: apicids 0-79
    physical id 1: apicids 128-207
```

(Continued on next page)

Platform Notes (Continued)

```
    physical id 2: apicids 256-335
    physical id 3: apicids 384-463
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          320
  On-line CPU(s) list:             0-319
  Vendor ID:                       GenuineIntel
  Model name:                      Intel(R) Xeon(R) Platinum 8460H
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              2
  Core(s) per socket:              40
  Socket(s):                       4
  Stepping:                        6
  CPU max MHz:                     3800.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        4400.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                   sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                   lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                   invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                   tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                                   avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                   xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                   cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                   arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                                   ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                   tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                   enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                   amx_tile flush_l1d arch_capabilities
  Virtualization:                  VT-x
  L1d cache:                       7.5 MiB (160 instances)
  L1i cache:                       5 MiB (160 instances)
  L2 cache:                        320 MiB (160 instances)
  L3 cache:                        420 MiB (4 instances)
  NUMA node(s):                    16
  NUMA node0 CPU(s):               0-9,160-169
  NUMA node1 CPU(s):               10-19,170-179
  NUMA node2 CPU(s):               20-29,180-189
  NUMA node3 CPU(s):               30-39,190-199
  NUMA node4 CPU(s):               40-49,200-209
  NUMA node5 CPU(s):               50-59,210-219
  NUMA node6 CPU(s):               60-69,220-229
  NUMA node7 CPU(s):               70-79,230-239
  NUMA node8 CPU(s):               80-89,240-249
  NUMA node9 CPU(s):               90-99,250-259
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node10 CPU(s):              100-109,260-269
  NUMA node11 CPU(s):              110-119,270-279
  NUMA node12 CPU(s):              120-129,280-289
  NUMA node13 CPU(s):              130-139,290-299
  NUMA node14 CPU(s):              140-149,300-309
  NUMA node15 CPU(s):              150-159,310-319
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     7.5M   12 Data            1     64        1             64
     L1i       32K       5M    8 Instruction     1     64        1             64
     L2         2M     320M   16 Unified         2   2048        1             64
     L3       105M     420M   15 Unified         3 114688        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0-9,160-169
  node 0 size: 128598 MB
  node 0 free: 127815 MB
  node 1 cpus: 10-19,170-179
  node 1 size: 129018 MB
  node 1 free: 128811 MB
  node 2 cpus: 20-29,180-189
  node 2 size: 129018 MB
  node 2 free: 128828 MB
  node 3 cpus: 30-39,190-199
  node 3 size: 129018 MB
  node 3 free: 128826 MB
  node 4 cpus: 40-49,200-209
  node 4 size: 129018 MB
  node 4 free: 128677 MB
  node 5 cpus: 50-59,210-219
  node 5 size: 129018 MB
  node 5 free: 128657 MB
  node 6 cpus: 60-69,220-229
  node 6 size: 129018 MB
  node 6 free: 128694 MB
  node 7 cpus: 70-79,230-239
  node 7 size: 129018 MB
  node 7 free: 128701 MB
  node 8 cpus: 80-89,240-249
  node 8 size: 129018 MB
  node 8 free: 128505 MB
  node 9 cpus: 90-99,250-259
  node 9 size: 129018 MB
  node 9 free: 128663 MB
  node 10 cpus: 100-109,260-269
  node 10 size: 129018 MB
  node 10 free: 128687 MB
```

(Continued on next page)

Platform Notes (Continued)

```
    node 11 cpus: 110-119,270-279
    node 11 size: 128984 MB
    node 11 free: 128619 MB
    node 12 cpus: 120-129,280-289
    node 12 size: 129018 MB
    node 12 free: 128295 MB
    node 13 cpus: 130-139,290-299
    node 13 size: 129018 MB
    node 13 free: 128477 MB
    node 14 cpus: 140-149,300-309
    node 14 size: 129018 MB
    node 14 free: 128467 MB
    node 15 cpus: 150-159,310-319
    node 15 size: 128610 MB
    node 15 free: 127932 MB
    node distances:
    node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
      0:  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31
      1:  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31
      2:  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31
      3:  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31
      4:  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21
      5:  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21
      6:  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21
      7:  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21
      8:  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21
      9:  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21
     10:  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21
     11:  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21
     12:  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12
     13:  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12
     14:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12
     15:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10

 ------------------------------------------------------------
 9. /proc/meminfo
    MemTotal:       2112960780 kB

 ------------------------------------------------------------
 10. who -r
   run-level 3 Jul 4 18:10

 ------------------------------------------------------------
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
   Default Target  Status
   multi-user      running

 ------------------------------------------------------------
 12. Services, from systemctl list-unit-files
   STATE            UNIT FILES
   enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                    irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd postfix
                    purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                    wickedd-dhcp6 wickedd-nanny
   enabled-runtime  systemd-remount-fs
   disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                    firewalld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load
                    lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd
                    serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
```

(Continued on next page)

Platform Notes (Continued)

```
                 systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
  indirect         wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=1e79ef75-7aac-47dd-b0b3-7222e12a3a30
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=325M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing                1
  kernel.randomize_va_space            2
  vm.compaction_proactiveness         20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
```

(Continued on next page)

Platform Notes (Continued)

```
  pages_to_scan           4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/Benchmark/speccpu
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      xfs   1.8T   32G  1.8T   2% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         FUJITSU

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    9x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
    4x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
    1x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
    18x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       FUJITSU
   BIOS Version:      V1.0.0.0 R1.0.0 for D3986-A1
   BIOS Date:         05/27/2023
   BIOS Revision:     1.0
   Firmware Revision: 2.6
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------

==========================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------

==========================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------

==========================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-04 05:13:00-0400.
Report generated on 2023-08-02 16:33:10 by CPU2017 PS formatter v6716.
Originally published on 2023-08-01.