



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 374

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

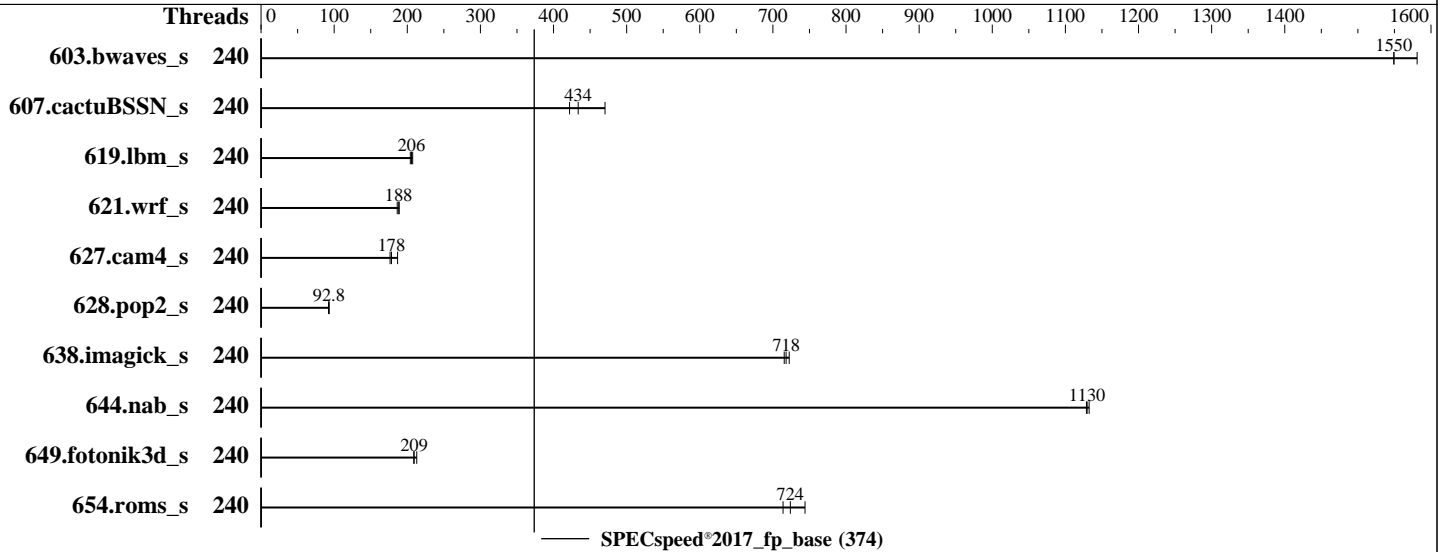

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 240 cores, 4 chips
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960GB M.2 NVME SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Kernel 5.14.0-70.22.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version RSE105E 1.10 released May-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 374

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	240	37.3	1580	<u>38.1</u>	<u>1550</u>	38.1	1550							
607.cactuBSSN_s	240	<u>38.4</u>	<u>434</u>	39.5	422	35.4	470							
619.lbm_s	240	25.3	207	25.7	204	<u>25.5</u>	<u>206</u>							
621.wrf_s	240	70.0	189	71.0	186	<u>70.2</u>	<u>188</u>							
627.cam4_s	240	<u>49.7</u>	<u>178</u>	47.5	187	50.2	176							
628.pop2_s	240	129	92.4	128	93.0	<u>128</u>	<u>92.8</u>							
638.imagick_s	240	<u>20.1</u>	<u>718</u>	20.0	722	20.2	715							
644.nab_s	240	<u>15.5</u>	<u>1130</u>	15.4	1130	15.5	1130							
649.fotonik3d_s	240	43.7	209	<u>43.5</u>	<u>209</u>	42.8	213							
654.roms_s	240	<u>21.8</u>	<u>724</u>	21.2	744	22.1	714							

SPECspeed®2017_fp_base = 374

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 374

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

Hyper-Threading set to Disabled
C-State set to Legacy
Adjacent Cache Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Aug 1 09:28:57 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 250 (250-6.el9_0)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
09:28:57 up 0 min, 1 user, load average: 0.37, 0.12, 0.04
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root     tty1      09:28   7.00s  0.89s  0.00s  -bash
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals              (-i) 8255602
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 374

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```

max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 8255602
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base --output_format all --define
  drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.007/temlogs/preenv.fpspeed.007.0.log --lognum 007.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 60
siblings      : 60
4 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
0,362,364,366,368,370,372,374
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
8,490,492,494,496,498,500,502

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 374

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                240
On-line CPU(s) list:   0-239
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:      Intel(R) Xeon(R) Platinum 8490H
CPU family:            6
Model:                 143
Thread(s) per core:   1
Core(s) per socket:   60
Socket(s):             4
Stepping:              8
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                      invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                      tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
                      smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                      cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                      arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                      vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                      bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                      tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             11.3 MiB (240 instances)
L1i cache:             7.5 MiB (240 instances)
L2 cache:              480 MiB (240 instances)
L3 cache:              450 MiB (4 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-59
NUMA node1 CPU(s):    60-119
NUMA node2 CPU(s):    120-179
NUMA node3 CPU(s):    180-239
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 374

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	32K	7.5M	8	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	112.5M	450M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

```
node 0 cpus: 0-59
node 0 size: 515708 MB
node 0 free: 513757 MB
node 1 cpus: 60-119
node 1 size: 516083 MB
node 1 free: 514685 MB
node 2 cpus: 120-179
node 2 size: 516083 MB
node 2 free: 515119 MB
node 3 cpus: 180-239
node 3 size: 516063 MB
node 3 free: 514997 MB
node distances:
node  0  1  2  3
0:  10  21  21  21
1:  21  10  21  21
2:  21  21  10  21
3:  21  21  21  10
```

9. /proc/meminfo

MemTotal: 2113471944 kB

10. who -r

run-level 3 Aug 1 09:28

11. Systemd service manager version: systemd 250 (250-6.el9_0)

```
Default Target Status
multi-user      starting
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd
rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator udisks2 upower

enabled-runtime systemd-remount-fs
disabled canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update nftables rdisc
rhsm rhsm-facts rpmbd-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
systemd-pstore systemd-sysex
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-70.22.1.el9_0.x86_64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 374

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
root=UUID=ab67882b-b899-4e91-927d-11b46332da76
ro
resume=UUID=be9a090f-c3a8-4064-8608-f8324bf589c3
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
-----
```

```
-----
19. Disk information
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 374

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme1nlp4 xfs 819G 15G 804G 2% /home

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR850 V3
Product Family: ThinkSystem
Serial: None

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
21x SK Hynix HMC94AEBRA102N 64 GB 2 rank 4800
4x SK Hynix HMC94AEBRA109N 64 GB 2 rank 4800
7x SK Hynix HMC94AEBRA123N 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: RSE105E-1.10
BIOS Date: 05/12/2023
BIOS Revision: 1.10
Firmware Revision: 1.10

Compiler Version Notes

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 374

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

-assume byterecl

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 374

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-W.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-W.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-31 21:28:57-0400.

Report generated on 2023-08-16 14:20:19 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.