



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H,
2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

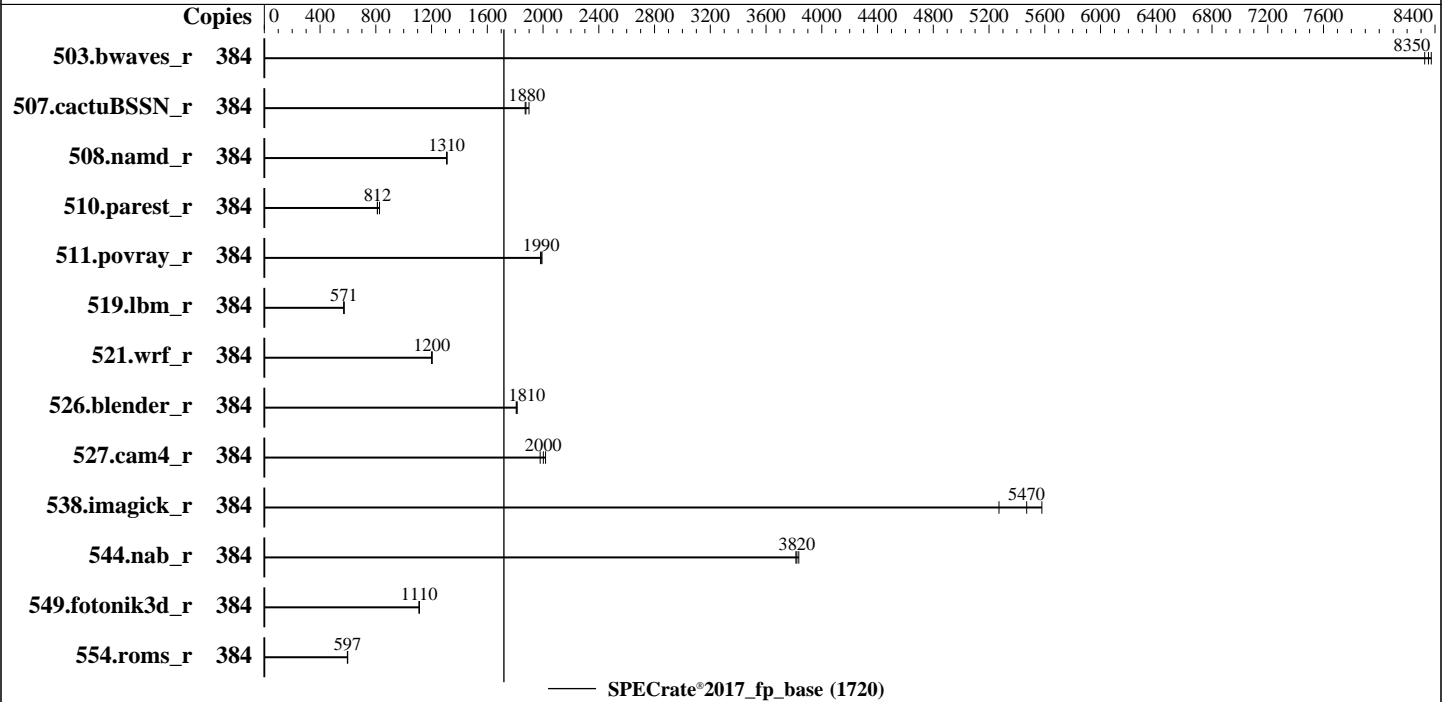

Hardware

CPU Name: Intel Xeon Platinum 8468H
 Max MHz: 3800
 Nominal: 2100
 Enabled: 192 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1.92 TB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for
 D3984-A1x. Released Sep-2023
 tested as V1.0.0.0 R1.2.0 for D3984-A1x May-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at
 the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	462	8330	460	8370	461	8350							
507.cactuBSSN_r	384	256	1900	259	1880	260	1870							
508.namd_r	384	279	1310	278	1310	279	1310							
510.parest_r	384	1215	827	1239	811	1237	812							
511.povray_r	384	451	1990	453	1980	450	1990							
519.lbm_r	384	708	571	708	571	709	571							
521.wrf_r	384	715	1200	716	1200	716	1200							
526.blender_r	384	322	1810	323	1810	324	1810							
527.cam4_r	384	333	2020	339	1980	335	2000							
538.imagick_r	384	175	5470	171	5580	181	5270							
544.nab_r	384	169	3820	169	3810	169	3840							
549.fotonik3d_r	384	1345	1110	1346	1110	1348	1110							
554.roms_r	384	1020	598	1024	596	1022	597							

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu/lib/intel64:/home/Benchmark/speccpu/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H,
2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Package C State limit = C0

CPU Performance Boost = Aggressive

SNC (Sub NUMA) = Enable SNC4

FAN Control = Full

Sysinfo program /home/Benchmark/speccpu/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sat Jul 8 20:38:45 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
20:38:45 up 2 min, 1 user, load average: 30.35, 18.42, 7.17

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	ttyl	-	20:38	13.00s	2.41s	0.32s	-bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H,
2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 8253594
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 8253594
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8468H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 6
microcode     : 0x2b0001b0
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 48
siblings      : 96
4 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 2: core ids 0-47
physical id 3: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

physical id 2: apicids 256-351
physical id 3: apicids 384-479

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      384
On-line CPU(s) list:        0-383
Vendor ID:                   GenuineIntel
Model name:                  Intel(R) Xeon(R) Platinum 8468H
CPU family:                  6
Model:                       143
Thread(s) per core:         2
Core(s) per socket:         48
Socket(s):                   4
Stepping:                    6
CPU max MHz:                 3800.0000
CPU min MHz:                 800.0000
BogoMIPS:                    4200.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                             clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                             lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                             nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                             ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                             sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                             lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                             invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                             tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                             avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                             avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                             xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                             ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                             tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                             enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                             amx_tile flush_lld arch_capabilities
Virtualization:              VT-x
L1d cache:                   9 MiB (192 instances)
L1i cache:                   6 MiB (192 instances)
L2 cache:                    384 MiB (192 instances)
L3 cache:                    420 MiB (4 instances)
NUMA node(s):               16
NUMA node0 CPU(s):          0-11,192-203
NUMA node1 CPU(s):          12-23,204-215
NUMA node2 CPU(s):          24-35,216-227
NUMA node3 CPU(s):          36-47,228-239
NUMA node4 CPU(s):          48-59,240-251
NUMA node5 CPU(s):          60-71,252-263
NUMA node6 CPU(s):          72-83,264-275
NUMA node7 CPU(s):          84-95,276-287
NUMA node8 CPU(s):          96-107,288-299
NUMA node9 CPU(s):          108-119,300-311

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H,
2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

NUMA node10 CPU(s):          120-131,312-323
NUMA node11 CPU(s):          132-143,324-335
NUMA node12 CPU(s):          144-155,336-347
NUMA node13 CPU(s):          156-167,348-359
NUMA node14 CPU(s):          168-179,360-371
NUMA node15 CPU(s):          180-191,372-383
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	2M	384M	16	Unified	2	2048	1	64
L3	105M	420M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-11,192-203
node 0 size: 128597 MB
node 0 free: 127695 MB
node 1 cpus: 12-23,204-215
node 1 size: 129017 MB
node 1 free: 128673 MB
node 2 cpus: 24-35,216-227
node 2 size: 129017 MB
node 2 free: 128690 MB
node 3 cpus: 36-47,228-239
node 3 size: 129017 MB
node 3 free: 128690 MB
node 4 cpus: 48-59,240-251
node 4 size: 129017 MB
node 4 free: 128751 MB
node 5 cpus: 60-71,252-263
node 5 size: 129017 MB
node 5 free: 128755 MB
node 6 cpus: 72-83,264-275
node 6 size: 129017 MB
node 6 free: 128761 MB
node 7 cpus: 84-95,276-287
node 7 size: 129017 MB
node 7 free: 128822 MB
node 8 cpus: 96-107,288-299
node 8 size: 129017 MB
node 8 free: 128427 MB
node 9 cpus: 108-119,300-311
node 9 size: 129017 MB
node 9 free: 128518 MB
node 10 cpus: 120-131,312-323
node 10 size: 128983 MB
node 10 free: 128228 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

node 11 cpus: 132-143,324-335
node 11 size: 129017 MB
node 11 free: 128438 MB
node 12 cpus: 144-155,336-347
node 12 size: 129017 MB
node 12 free: 128565 MB
node 13 cpus: 156-167,348-359
node 13 size: 129017 MB
node 13 free: 128434 MB
node 14 cpus: 168-179,360-371
node 14 size: 129017 MB
node 14 free: 128430 MB
node 15 cpus: 180-191,372-383
node 15 size: 128609 MB
node 15 free: 128158 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 12 12 12 21 21 21 21 21 21 21 21 31 31 31 31
1:  12 10 12 12 21 21 21 21 21 21 21 21 31 31 31 31
2:  12 12 10 12 21 21 21 21 21 21 21 21 31 31 31 31
3:  12 12 12 10 21 21 21 21 21 21 21 21 31 31 31 31
4:  21 21 21 21 10 12 12 12 31 31 31 31 21 21 21 21
5:  21 21 21 21 12 10 12 12 31 31 31 31 21 21 21 21
6:  21 21 21 21 12 12 10 12 31 31 31 31 21 21 21 21
7:  21 21 21 21 12 12 12 10 31 31 31 31 21 21 21 21
8:  21 21 21 21 31 31 31 31 10 12 12 12 21 21 21 21
9:  21 21 21 21 31 31 31 31 12 10 12 12 21 21 21 21
10: 21 21 21 21 31 31 31 31 12 12 10 12 21 21 21 21
11: 21 21 21 21 21 31 31 31 12 12 12 10 21 21 21 21
12: 31 31 31 31 21 21 21 21 21 21 21 21 10 12 12 12
13: 31 31 31 31 21 21 21 21 21 21 21 21 12 10 12 12
14: 31 31 31 31 21 21 21 21 21 21 21 21 12 12 10 12
15: 31 31 31 31 21 21 21 21 21 21 21 21 12 12 12 10

```

```

-----
9. /proc/meminfo
MemTotal:      2112944612 kB

```

```

-----
10. who -r
run-level 3 Jul 8 20:38

```

```

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd postfix
                purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewallld gpm grub2-once haveged-switch-root ipmi ipmievld issue-add-ssh-keys kexec-load
                lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd
                serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

Platform Notes (Continued)

indirect systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=1e79ef75-7aac-47dd-b0b3-7222e12a3a30
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=325M,high
crashkernel=72M,low

```

```

14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.

boost state support:
Supported: yes
Active: yes

```

```

15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

19. Disk information
SPEC is set to: /home/Benchmark/speccpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 xfs 1.8T 32G 1.8T 2% /

20. /sys/devices/virtual/dmi/id
Vendor: FUJITSU

21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
9x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
4x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
1x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
18x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUJITSU
BIOS Version: V1.0.0.0 R1.0.0 for D3986-A1
BIOS Date: 05/27/2023
BIOS Revision: 1.0
Firmware Revision: 2.6

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H,
2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Platinum 8468H,
2.10GHz

SPECrate®2017_fp_base = 1720

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-08 07:38:44-0400.

Report generated on 2023-08-30 09:38:33 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.