# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Inspur Electronic Information Industry Co., Ltd.

## NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 268

**CPU2017 License:** 3358
**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd.
**Tested by:** Inspur Electronic Information Industry Co., Ltd.

**Test Date:** Aug-2023
**Hardware Availability:** Apr-2023
**Software Availability:** Dec-2022

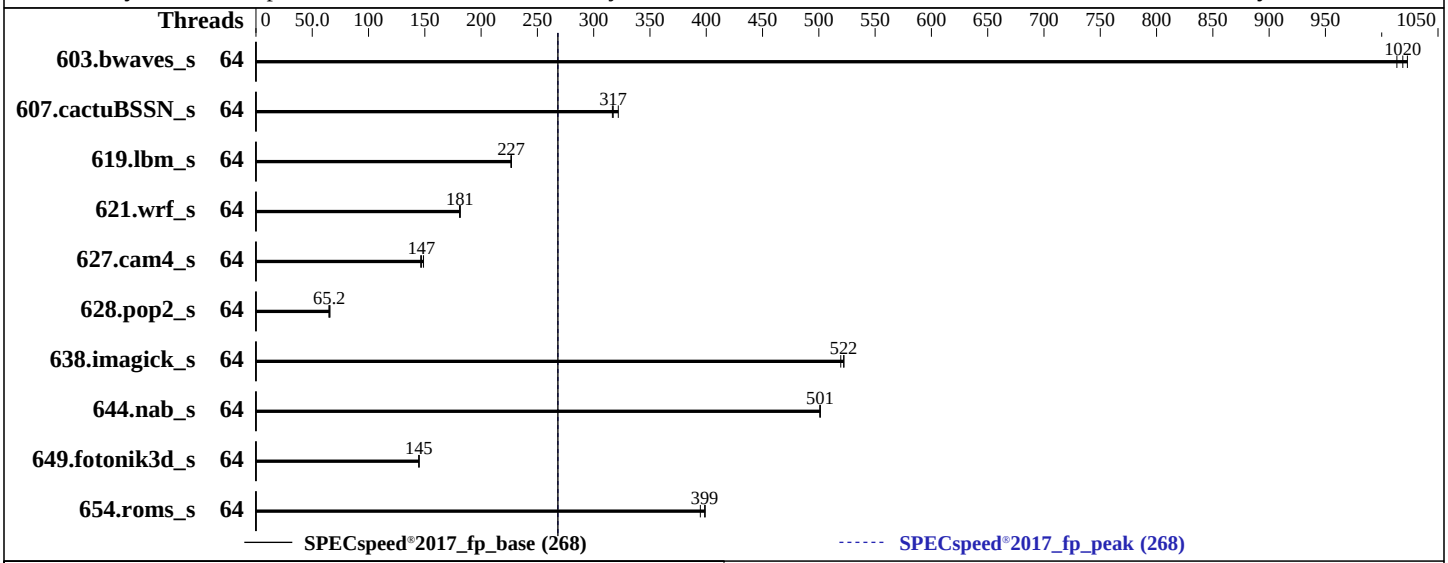


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 6430 |
| Max MHz: | 3400 |
| Nominal: | 2100 |
| Enabled: | 64 cores, 2 chips |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 60 MB I+D on chip per chip |
| Other: | None |
| Memory: | 512 GB (16 x 32 GB 2Rx4 PC5-4800B-R, running at 4400) |
| Storage: | 1 x 1 TB NVME SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 9.0 (Plow) 5.14.0-70.22.1.el9_0.x86_64 |
| Compiler: | C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux; |
| Parallel: | Yes |
| Firmware: | Version 03.01.00 released Dec-2022 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Inspur Electronic Information Industry Co., Ltd.

## NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 268

**CPU2017 License:** 3358
**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd.
**Tested by:** Inspur Electronic Information Industry Co., Ltd.

**Test Date:** Aug-2023
**Hardware Availability:** Apr-2023
**Software Availability:** Dec-2022

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 64 | 58.2 | 1010 | 57.7 | 1020 | **57.9** | **1020** | 64 | 58.2 | 1010 | 57.7 | 1020 | **57.9** | **1020** |
| 607.cactuBSSN_s | 64 | **52.5** | **317** | 52.7 | 317 | 51.8 | 322 | 64 | **52.5** | **317** | 52.7 | 317 | 51.8 | 322 |
| 619.lbm_s | 64 | 23.1 | 227 | 23.1 | 227 | **23.1** | **227** | 64 | 23.1 | 227 | 23.1 | 227 | **23.1** | **227** |
| 621.wrf_s | 64 | 73.1 | 181 | **73.0** | **181** | 72.9 | 181 | 64 | 73.1 | 181 | **73.0** | **181** | 72.9 | 181 |
| 627.cam4_s | 64 | 59.5 | 149 | 60.6 | 146 | **60.2** | **147** | 64 | 59.5 | 149 | 60.6 | 146 | **60.2** | **147** |
| 628.pop2_s | 64 | 181 | 65.8 | 183 | 64.8 | **182** | **65.2** | 64 | 181 | 65.8 | 183 | 64.8 | **182** | **65.2** |
| 638.imagick_s | 64 | 27.8 | 519 | **27.6** | **522** | 27.6 | 522 | 64 | 27.8 | 519 | **27.6** | **522** | 27.6 | 522 |
| 644.nab_s | 64 | 34.9 | 501 | **34.9** | **501** | 34.9 | 501 | 64 | 34.9 | 501 | **34.9** | **501** | 34.9 | 501 |
| 649.fotonik3d_s | 64 | **62.9** | **145** | 62.9 | 145 | 63.0 | 145 | 64 | **62.9** | **145** | 62.9 | 145 | 63.0 | 145 |
| 654.roms_s | 64 | 39.5 | 399 | 39.9 | 395 | **39.5** | **399** | 64 | 39.5 | 399 | 39.9 | 395 | **39.5** | **399** |

**SPECspeed®2017_fp_base = 268**

**SPECspeed®2017_fp_peak = 268**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to SNC2
Hyper Threading set to disable

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Aug  3 13:31:49 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64 x86_64 x86_64
  GNU/Linux

------------------------------------------------------------
2. w
   13:31:49 up  4:36,  1 user,  load average: 4.69, 5.72, 3.43
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1      08:56    4:35m  1.12s  0.00s sh
  reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   real-time non-blocking time  (microseconds, -R) unlimited
   core file size              (blocks, -c) 0
   data seg size               (kbytes, -d) unlimited
   scheduling priority                 (-e) 0
   file size                   (blocks, -f) unlimited
   pending signals                     (-i) 2062247
   max locked memory           (kbytes, -l) 64
   max memory size             (kbytes, -m) unlimited
   open files                          (-n) 1024
   pipe size                (512 bytes, -p) 8
   POSIX message queues         (bytes, -q) 819200
   real-time priority                  (-r) 0
   stack size                  (kbytes, -s) unlimited
   cpu time                   (seconds, -t) unlimited
   max user processes                  (-u) 2062247
   virtual memory              (kbytes, -v) unlimited
   file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 28
 login -- root
 -bash
 sh reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak -o all --define
   drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak --output_format all
   --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.006/templogs/preenv.fpspeed.006.0.log --lognum 006.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Gold 6430
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 6
    microcode       : 0x2b000130
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 32
    siblings        : 32
    2 physical ids (chips)
    64 processors (hardware threads)
    physical id 0: core ids 0-31
    physical id 1: core ids 0-31
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
    physical id 1: apicids
    128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
    80,182,184,186,188,190
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu
```

(Continued on next page)

## Platform Notes (Continued)

```
From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          64
  On-line CPU(s) list:             0-63
  Vendor ID:                       GenuineIntel
  BIOS Vendor ID:                  Intel(R) Corporation
  Model name:                      Intel(R) Xeon(R) Gold 6430
  BIOS Model name:                 Intel(R) Xeon(R) Gold 6430
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              1
  Core(s) per socket:              32
  Socket(s):                       2
  Stepping:                        6
  CPU max MHz:                     3400.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        3800.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                   x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                   abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                   intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                                   tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                   rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                                   avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                   cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                                   wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                                   avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                   avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                   cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                   arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  L1d cache:                       3 MiB (64 instances)
  L1i cache:                       2 MiB (64 instances)
  L2 cache:                        128 MiB (64 instances)
  L3 cache:                        120 MiB (2 instances)
  NUMA node(s):                    2
  NUMA node0 CPU(s):               0-31
  NUMA node1 CPU(s):               32-63
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       3M   12 Data            1    64        1             64
     L1i       32K       2M    8 Instruction     1    64        1             64
     L2         2M     128M   16 Unified         2  2048        1             64
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     L3        60M     120M   15 Unified         3 65536        1            64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-31
  node 0 size: 257608 MB
  node 0 free: 249825 MB
  node 1 cpus: 32-63
  node 1 size: 257993 MB
  node 1 free: 257626 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       527976368 kB

------------------------------------------------------------
10. who -r
  run-level 3 Aug 3 08:55

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                   LOAD   ACTIVE SUB    DESCRIPTION
  * dnf-makecache.service loaded failed failed dnf makecache

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          dbus-broker getty@ tuned udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd
                   blk-availability canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond
                   debug-shell firewalld irqbalance kdump kvm_stat lvm2-monitor man-db-restart-cache-update
                   mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmdb-rebuild
                   rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd
                   systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap

------------------------------------------------------------
15. cpupower frequency-info
```

(Continued on next page)

## Platform Notes (Continued)

```
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. tuned-adm active
  Current active profile: hpc-compute

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing              0
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio          3
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    10
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     10
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
21. Disk information
```

(Continued on next page)

## Platform Notes (Continued)

```
SPEC is set to: /home/CPU2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   819G  202G  617G  25% /home

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         IEI
    Product:        NF5280M7
    Product Family: Not specified
    Serial:         000000000

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800


------------------------------------------------------------
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      03.01.00
   BIOS Date:         12/29/2022
```

## Compiler Version Notes

```
==============================================================================================================
C              | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran        | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C     | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

**(Continued on next page)**

## Base Optimization Flags (Continued)

Fortran benchmarks:
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `basepeak = yes`

644.nab_s: `basepeak = yes`

Fortran benchmarks:

603.bwaves_s: `basepeak = yes`

649.fotonik3d_s: `basepeak = yes`

654.roms_s: `basepeak = yes`

Benchmarks using both Fortran and C:

621.wrf_s: `basepeak = yes`

627.cam4_s: `basepeak = yes`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.2.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.2.xml`


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.9 on 2023-08-03 13:31:48-0400.
Report generated on 2023-08-30 09:41:32 by CPU2017 PS formatter v6716.
Originally published on 2023-08-29.