



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

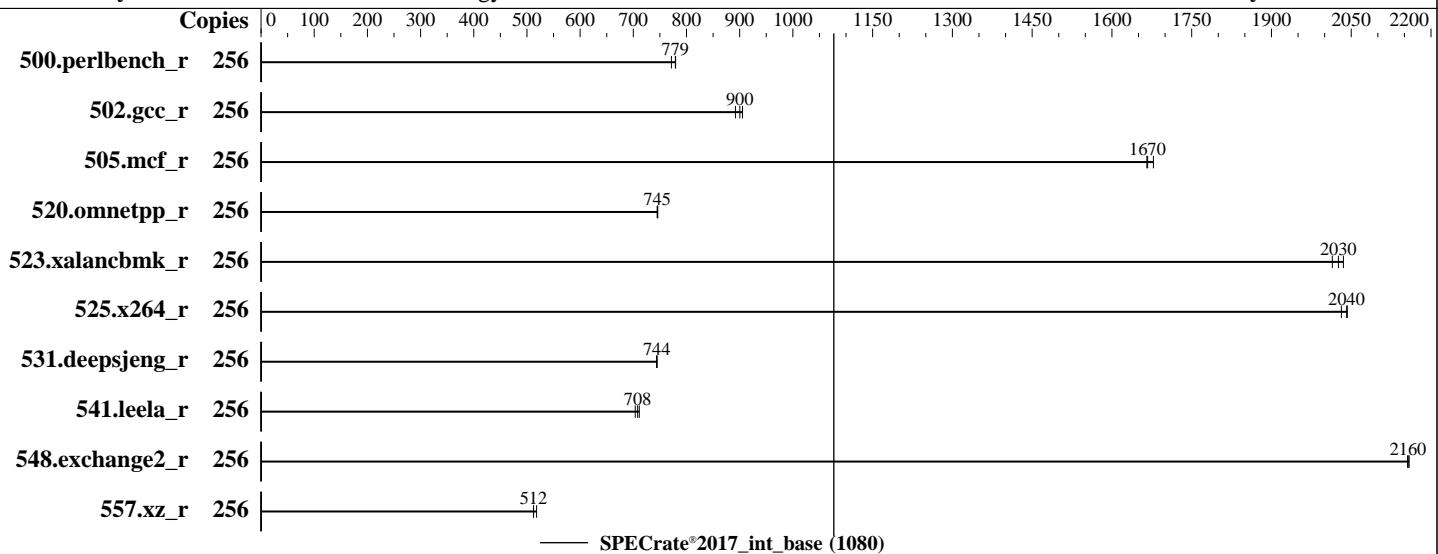

Hardware

CPU Name: Intel Xeon Platinum 8454H
Max MHz: 3400
Nominal: 2100
Enabled: 128 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 82.5 MB I+D on chip per chip
Other: None
Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 960 GB M.2 NVME SSD
Other: None

Software

OS: Red Hat Enterprise Linux 9.1 (Plow) (x86_64)
Compiler: Kernel 5.14.0-162.6.1.el9_1.x86_64
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Lenovo BIOS Version RSE105E 1.10 released May-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	523	780	528	772	523	779									
502.gcc_r	256	400	905	403	900	406	892									
505.mcf_r	256	248	1670	248	1670	247	1680									
520.omnetpp_r	256	450	746	451	745	451	745									
523.xalancbmk_r	256	133	2040	134	2010	133	2030									
525.x264_r	256	219	2040	220	2040	221	2030									
531.deepsjeng_r	256	394	745	394	744	394	744									
541.leela_r	256	596	711	602	704	599	708									
548.exchange2_r	256	311	2160	311	2160	311	2160									
557.xz_r	256	534	518	540	512	540	512									

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/lib/ia32:/home/cpu2017-1.1.9-ic
  2023.0/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

DCU Streamer Prefetcher set to Disabled

SNC set to SNC4

UPI Link Disable set to Disabled 1 Link

LLC Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sun Aug 27 08:12:58 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-12.el9_1)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
1. uname -a
Linux localhost.localdomain 5.14.0-162.6.1.el9_1.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Sep 30 07:36:03 EDT 2022
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
08:12:58 up 1 day, 15:26, 1 user, load average: 0.15, 0.03, 0.01
USER   TTY      LOGIN@    IDLE   JCPU   PCPU WHAT
root   tty1     Fri16   14.00s  1.03s  0.01s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 8255547
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 8255547
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=128 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=128 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.115/templogs/preenv.intrate.115.0.log --lognum 115.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8454H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode      : 0x2b0001b0
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrsb
cpu cores     : 32
siblings      : 64
4 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 2: core ids 0-31
physical id 3: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
physical id 2: apicids 256-319
physical id 3: apicids 384-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 256
On-line CPU(s) list:    0-255
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Platinum 8454H
BIOS Model name:        Intel(R) Xeon(R) Platinum 8454H
CPU family:              6
Model:                  143
Thread(s) per core:     2
Core(s) per socket:     32
Socket(s):              4
Stepping:                8
BogoMIPS:                4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                        invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
                        smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
                        cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxlptrk pconfig arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lld
                        arch_capabilities
Virtualization:          VT-x
L1d cache:               6 MiB (128 instances)
L1i cache:               4 MiB (128 instances)
L2 cache:               256 MiB (128 instances)
L3 cache:               330 MiB (4 instances)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
NUMA node(s): 16
NUMA node0 CPU(s): 0-7,128-135
NUMA node1 CPU(s): 8-15,136-143
NUMA node2 CPU(s): 16-23,144-151
NUMA node3 CPU(s): 24-31,152-159
NUMA node4 CPU(s): 32-39,160-167
NUMA node5 CPU(s): 40-47,168-175
NUMA node6 CPU(s): 48-55,176-183
NUMA node7 CPU(s): 56-63,184-191
NUMA node8 CPU(s): 64-71,192-199
NUMA node9 CPU(s): 72-79,200-207
NUMA node10 CPU(s): 80-87,208-215
NUMA node11 CPU(s): 88-95,216-223
NUMA node12 CPU(s): 96-103,224-231
NUMA node13 CPU(s): 104-111,232-239
NUMA node14 CPU(s): 112-119,240-247
NUMA node15 CPU(s): 120-127,248-255
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	82.5M	330M	15	Unified	3	90112	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0-7,128-135

node 0 size: 128681 MB

node 0 free: 127797 MB

node 1 cpus: 8-15,136-143

node 1 size: 129020 MB

node 1 free: 128345 MB

node 2 cpus: 16-23,144-151

node 2 size: 129020 MB

node 2 free: 128367 MB

node 3 cpus: 24-31,152-159

node 3 size: 129020 MB

node 3 free: 128332 MB

node 4 cpus: 32-39,160-167

node 4 size: 129020 MB

node 4 free: 128280 MB

node 5 cpus: 40-47,168-175

node 5 size: 129020 MB

node 5 free: 128380 MB

node 6 cpus: 48-55,176-183

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
node 6 size: 129020 MB
node 6 free: 128372 MB
node 7 cpus: 56-63,184-191
node 7 size: 129020 MB
node 7 free: 128375 MB
node 8 cpus: 64-71,192-199
node 8 size: 129020 MB
node 8 free: 128378 MB
node 9 cpus: 72-79,200-207
node 9 size: 129020 MB
node 9 free: 128346 MB
node 10 cpus: 80-87,208-215
node 10 size: 129020 MB
node 10 free: 128379 MB
node 11 cpus: 88-95,216-223
node 11 size: 129020 MB
node 11 free: 128382 MB
node 12 cpus: 96-103,224-231
node 12 size: 129020 MB
node 12 free: 128364 MB
node 13 cpus: 104-111,232-239
node 13 size: 128981 MB
node 13 free: 128339 MB
node 14 cpus: 112-119,240-247
node 14 size: 129020 MB
node 14 free: 128383 MB
node 15 cpus: 120-127,248-255
node 15 size: 128998 MB
node 15 free: 128310 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  12  12  12  21  21  21  21  31  31  31  31  21  21  21  21
  1: 12  10  12  12  21  21  21  21  31  31  31  31  21  21  21  21
  2: 12  12  10  12  21  21  21  21  31  31  31  31  21  21  21  21
  3: 12  12  12  10  21  21  21  21  31  31  31  31  21  21  21  21
  4: 21  21  21  21  10  12  12  12  21  21  21  21  21  31  31  31
  5: 21  21  21  21  12  12  12  21  21  21  21  21  31  31  31  31
  6: 21  21  21  21  12  12  10  12  21  21  21  21  31  31  31  31
  7: 21  21  21  21  12  12  12  10  21  21  21  21  31  31  31  31
  8: 31  31  31  31  21  21  21  21  10  12  12  12  21  21  21  21
  9: 31  31  31  31  21  21  21  21  12  10  12  12  21  21  21  21
 10: 31  31  31  31  21  21  21  21  12  12  10  12  21  21  21  21
 11: 31  31  31  31  21  21  21  21  12  12  10  21  21  21  21  21
 12: 21  21  21  21  31  31  31  31  21  21  21  21  10  12  12  12
 13: 21  21  21  21  31  31  31  31  21  21  21  21  12  10  12  12
 14: 21  21  21  21  31  31  31  31  21  21  21  21  12  12  10  12
 15: 21  21  21  21  31  31  31  31  21  21  21  21  12  12  12  10
```

```
-----  
9. /proc/meminfo
MemTotal: 2113460428 kB
```

```
-----  
10. who -r
run-level 3 Aug 25 16:46
```

```
-----  
11. Systemd service manager version: systemd 250 (250-12.el9_1)
Default Target Status
multi-user     degraded
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
-----  
12. Failed units, from systemctl list-units --state=failed  
    UNIT           LOAD  ACTIVE SUB   DESCRIPTION  
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online  
* systemd-sysctl.service          loaded failed failed Apply Kernel Variables  
  
-----  
13. Services, from systemctl list-unit-files  
    STATE      UNIT FILES  
  enabled      NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited crond  
              dbus-broker getty@ irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname  
              rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd  
              systemd-network-generator udisks2 upower  
  enabled-runtime  systemd-remount-fs  
  disabled      canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot  
              console-getty cpupower debug-shell firewalld kvm_stat man-db-restart-cache-update nftables  
              pesign rdisc rhsm rhsm-facts rpmbuild serial-getty@ sshd-keygen@  
              systemd-boot-check-no-failures systemd-pstore systemd-sysext  
  indirect      sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo  
  
-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-162.6.1.el9_1.x86_64  
root=UUID=43a7f1b1-66b0-456a-8c3f-451305a00281  
ro  
resume=UUID=58de1c40-542f-453b-bb6a-6bb3510660a  
  
-----  
15. cpupower frequency-info  
analyzing CPU 0:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes  
  
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes       0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode           0  
  
-----  
17. /sys/kernel/mm/transparent_hugepage
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
defrag      always defer defer+advise [advise] never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag          1
max_ptes_none   511
max_ptes_shared 256
max_ptes_swap   64
pages_to_scan   4096
scan_sleep_millisecs 10000

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.1 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.1 (Plow)
system-release  Red Hat Enterprise Linux release 9.1 (Plow)

-----
20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4  xfs   819G  16G  804G  2%  /home

-----
21. /sys/devices/virtual/dmi/id
Vendor:        Lenovo
Product:       ThinkSystem SR850 V3
Product Family: ThinkSystem
Serial:        None

-----
22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
21x SK Hynix HMCG94AEBRA102N 64 GB 2 rank 4800
4x SK Hynix HMCG94AEBRA109N 64 GB 2 rank 4800
7x SK Hynix HMCG94AEBRA123N 64 GB 2 rank 4800

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:    Lenovo
BIOS Version:   RSE105E-1.10
BIOS Date:      05/12/2023
BIOS Revision:  1.10
Firmware Revision: 1.10
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
Fortran | 548.exchange2_r(base)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1080

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-X.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-X.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-26 20:12:58-0400.

Report generated on 2024-01-29 18:08:50 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.