SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.55 GHz, AMD EPYC 9684X)

SPECrate®2017_fp_base = 1540

SPECrate®2017_fp_peak = 1600

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

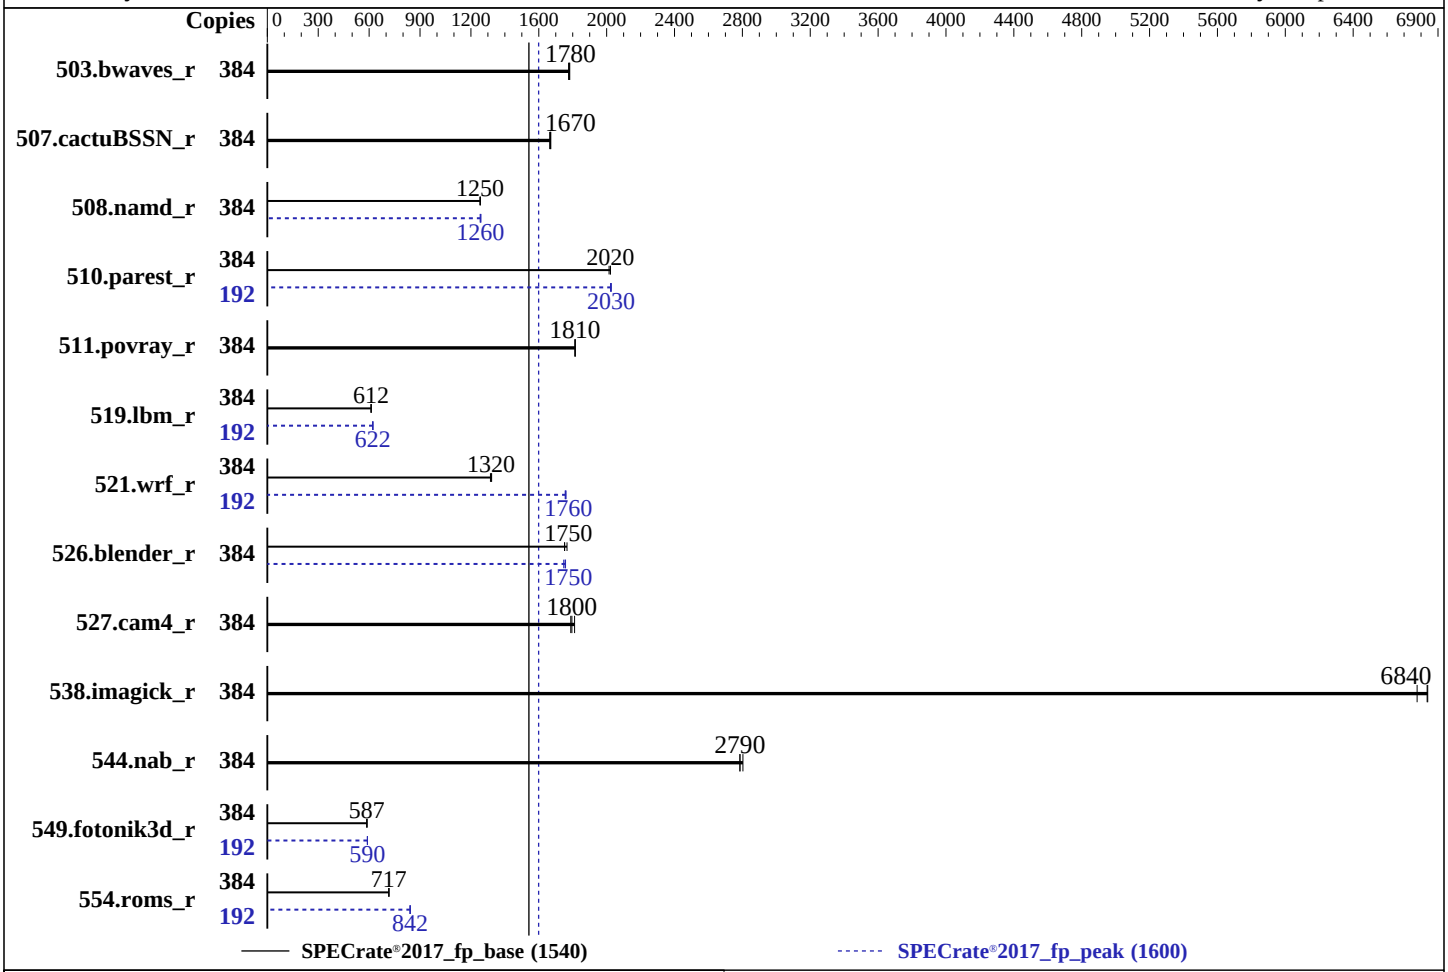

Hardware

CPU Name:	AMD EPYC 9684X
Max MHz:	3700
Nominal:	2550
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	1152 MB I+D on chip per chip, 96 MB shared / 8 cores
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 Kernel 5.14.21-150400.22-default
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	No
Firmware:	HPE BIOS Version v1.40 07/12/2023 released Jul-2023
File System:	btrfs
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	2169	1780	**2163**	**1780**	2160	1780	384	2169	1780	**2163**	**1780**	2160	1780
507.cactuBSSN_r	384	**291**	**1670**	291	1670	292	1660	384	**291**	**1670**	291	1670	292	1660
508.namd_r	384	291	1250	**291**	**1250**	290	1260	384	291	1250	**290**	**1260**	290	1260
510.parest_r	384	**497**	**2020**	499	2010	497	2020	192	**248**	**2030**	248	2030	248	2020
511.povray_r	384	**494**	**1810**	494	1810	494	1820	384	**494**	**1810**	494	1810	494	1820
519.lbm_r	384	662	611	661	613	**662**	**612**	192	**325**	**622**	326	620	325	623
521.wrf_r	384	654	1320	651	1320	**652**	**1320**	192	245	1760	**245**	**1760**	244	1760
526.blender_r	384	334	1750	331	1770	**334**	**1750**	384	335	1750	**333**	**1750**	333	1760
527.cam4_r	384	371	1810	**374**	**1800**	376	1790	384	371	1810	**374**	**1800**	376	1790
538.imagick_r	384	141	6780	140	6840	**140**	**6840**	384	141	6780	140	6840	**140**	**6840**
544.nab_r	384	**232**	**2790**	231	2800	232	2790	384	**232**	**2790**	231	2800	232	2790
549.fotonik3d_r	384	2546	588	2554	586	**2548**	**587**	192	1268	590	1268	590	**1268**	**590**
554.roms_r	384	**852**	**717**	851	717	852	716	192	363	840	362	843	**362**	**842**

SPECrate®2017_fp_base = 1540

SPECrate®2017_fp_peak = 1600

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
      "/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS Configuration
  Workload Profile set to General Throughput Compute
  Determinism Control set to Manual
  Performance Determinism set to Power Deterministic
  Memory Patrol Scrubbing set to Disabled
  Last-Level Cache (LLC) as NUMA Node set to Enabled
  NUMA memory domains per socket set to Four memory domains per socket
  ACPI CST C2 Latency set to 18 microseconds
  Thermal Configuration set to Maximum Cooling
  Workload Profile set to Custom
    Power Regulator set to OS Control Mode
    L2 HW Prefetcher set to Disabled
 The system ROM used for this result contains microcode version 0xa10123e for the
 AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this
 ROM is version Genoa-XPI 1.0.0.8

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Tue Aug  8 19:48:23 2023

 SUT (System Under Test) info as seen by some common utilities.

 ----------------------------------------------------------
 Table of contents
 ----------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
```

(Continued on next page)

Platform Notes (Continued)

```
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222/lp)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   19:48:23 up 14 min,  3 users,  load average: 0.17, 1.35, 2.90
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     :        :                19:35   ?xdm?   4:50   0.02s gdm-session-worker [pam/gdm-password]
  root     :1       :1               19:35   ?xdm?   4:50   0.03s /usr/lib/gdm/gdm-x-session
  --register-session --run-script gnome
  root     pts/1    172.16.0.100     19:36   15.00s  1.29s  0.16s /bin/bash ./amd_rate_aocc400_znver4_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 3094179
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 3094179
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
```

(Continued on next page)

Platform Notes (Continued)

```
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root@pts/1
 -bash
 python3 ./run_fprate_znver4_A1.py
 /bin/bash ./amd_rate_aocc400_znver4_A1.sh
 runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.036/templogs/preenv.fprate.036.0.log --lognum 036.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9684X 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 2
    microcode       : 0xa10123e
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 96
    siblings        : 192
    2 physical ids (chips)
    384 processors (hardware threads)
    physical id 0: core ids 0-95
    physical id 1: core ids 0-95
    physical id 0: apicids 0-191
    physical id 1: apicids 256-447
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          384
  On-line CPU(s) list:             0-383
  Vendor ID:                       AuthenticAMD
  Model name:                      AMD EPYC 9684X 96-Core Processor
  CPU family:                      25
  Model:                           17
  Thread(s) per core:              2
  Core(s) per socket:              96
  Socket(s):                       2
  Stepping:                        2
  Frequency boost:                 enabled
  CPU max MHz:                     2550.0000
  CPU min MHz:                     1500.0000
  BogoMIPS:                        5092.25
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                   constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                   pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                   popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
```

(Continued on next page)

Platform Notes (Continued)

```
                                abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
  Virtualization:               AMD-V
  L1d cache:                    6 MiB (192 instances)
  L1i cache:                    6 MiB (192 instances)
  L2 cache:                     192 MiB (192 instances)
  L3 cache:                     2.3 GiB (24 instances)
  NUMA node(s):                 24
  NUMA node0 CPU(s):            0-7,192-199
  NUMA node1 CPU(s):            8-15,200-207
  NUMA node2 CPU(s):            16-23,208-215
  NUMA node3 CPU(s):            24-31,216-223
  NUMA node4 CPU(s):            32-39,224-231
  NUMA node5 CPU(s):            40-47,232-239
  NUMA node6 CPU(s):            48-55,240-247
  NUMA node7 CPU(s):            56-63,248-255
  NUMA node8 CPU(s):            64-71,256-263
  NUMA node9 CPU(s):            72-79,264-271
  NUMA node10 CPU(s):           80-87,272-279
  NUMA node11 CPU(s):           88-95,280-287
  NUMA node12 CPU(s):           96-103,288-295
  NUMA node13 CPU(s):           104-111,296-303
  NUMA node14 CPU(s):           112-119,304-311
  NUMA node15 CPU(s):           120-127,312-319
  NUMA node16 CPU(s):           128-135,320-327
  NUMA node17 CPU(s):           136-143,328-335
  NUMA node18 CPU(s):           144-151,336-343
  NUMA node19 CPU(s):           152-159,344-351
  NUMA node20 CPU(s):           160-167,352-359
  NUMA node21 CPU(s):           168-175,360-367
  NUMA node22 CPU(s):           176-183,368-375
  NUMA node23 CPU(s):           184-191,376-383
  Vulnerability Itlb multihit:  Not affected
  Vulnerability L1tf:           Not affected
  Vulnerability Mds:            Not affected
  Vulnerability Meltdown:       Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:     Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                filling
  Vulnerability Srbds:          Not affected
  Vulnerability Tsx async abort: Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       6M    8 Data            1    64        1             64
     L1i       32K       6M    8 Instruction     1    64        1             64
     L2         1M     192M    8 Unified         2  2048        1             64
     L3        96M     2.3G   16 Unified         3 98304        1             64

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 24 nodes (0-23)
   node 0 cpus: 0-7,192-199
   node 0 size: 31941 MB
   node 0 free: 31299 MB
   node 1 cpus: 8-15,200-207
   node 1 size: 32251 MB
   node 1 free: 32067 MB
   node 2 cpus: 16-23,208-215
   node 2 size: 32251 MB
   node 2 free: 31899 MB
   node 3 cpus: 24-31,216-223
   node 3 size: 32251 MB
   node 3 free: 32090 MB
   node 4 cpus: 32-39,224-231
   node 4 size: 32251 MB
   node 4 free: 32126 MB
   node 5 cpus: 40-47,232-239
   node 5 size: 32251 MB
   node 5 free: 32116 MB
   node 6 cpus: 48-55,240-247
   node 6 size: 32251 MB
   node 6 free: 32094 MB
   node 7 cpus: 56-63,248-255
   node 7 size: 32217 MB
   node 7 free: 32072 MB
   node 8 cpus: 64-71,256-263
   node 8 size: 32251 MB
   node 8 free: 32131 MB
   node 9 cpus: 72-79,264-271
   node 9 size: 32251 MB
   node 9 free: 31873 MB
   node 10 cpus: 80-87,272-279
   node 10 size: 32251 MB
   node 10 free: 31919 MB
   node 11 cpus: 88-95,280-287
   node 11 size: 32251 MB
   node 11 free: 31959 MB
   node 12 cpus: 96-103,288-295
   node 12 size: 32251 MB
   node 12 free: 32039 MB
   node 13 cpus: 104-111,296-303
   node 13 size: 32251 MB
   node 13 free: 31942 MB
   node 14 cpus: 112-119,304-311
   node 14 size: 32251 MB
   node 14 free: 31987 MB
   node 15 cpus: 120-127,312-319
   node 15 size: 32251 MB
   node 15 free: 32036 MB
   node 16 cpus: 128-135,320-327
   node 16 size: 32251 MB
   node 16 free: 32052 MB
   node 17 cpus: 136-143,328-335
   node 17 size: 32251 MB
   node 17 free: 32038 MB
   node 18 cpus: 144-151,336-343
   node 18 size: 32251 MB
   node 18 free: 32126 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 19 cpus: 152-159,344-351
   node 19 size: 32251 MB
   node 19 free: 32123 MB
   node 20 cpus: 160-167,352-359
   node 20 size: 32251 MB
   node 20 free: 32130 MB
   node 21 cpus: 168-175,360-367
   node 21 size: 32251 MB
   node 21 free: 32122 MB
   node 22 cpus: 176-183,368-375
   node 22 size: 32251 MB
   node 22 free: 32134 MB
   node 23 cpus: 184-191,376-383
   node 23 size: 32121 MB
   node 23 free: 31964 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23
     0:  10  11  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     1:  11  10  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     2:  11  11  10  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     3:  12  12  12  10  11  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     4:  12  12  12  11  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     5:  12  12  12  11  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     6:  12  12  12  12  12  12  10  11  11  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     7:  12  12  12  12  12  12  11  10  11  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     8:  12  12  12  12  12  12  11  11  10  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     9:  12  12  12  12  12  12  12  12  12  10  11  11  32  32  32  32  32  32  32  32  32  32  32  32
    10:  12  12  12  12  12  12  12  12  12  11  10  11  32  32  32  32  32  32  32  32  32  32  32  32
    11:  12  12  12  12  12  12  12  12  12  11  11  10  32  32  32  32  32  32  32  32  32  32  32  32
    12:  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  12  12  12  12  12  12  12  12  12
    13:  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  12  12  12  12  12  12  12  12  12
    14:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  12  12  12  12  12  12  12  12  12
    15:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  10  11  11  12  12  12  12  12  12
    16:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  10  11  12  12  12  12  12  12
    17:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  11  10  12  12  12  12  12  12
    18:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11  11  12  12  12
    19:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10  11  12  12  12
    20:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  11  10  12  12  12
    21:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12  10  11  11
    22:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12  11  10  11
    23:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792135632 kB

------------------------------------------------------------
10. who -r
  run-level 5 Aug 8 19:35

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron
                  display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings klog
```

(Continued on next page)

Platform Notes (Continued)

```
                  lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4
                  wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
  enabled-runtime systemd-remount-fs
  disabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon
                  appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh
                  boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed
                  debug-shell dmraid-activation dnsmasq ebtables exchange-bmc-os-info gpm grub2-once
                  haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid iscsiuio
                  issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap
                  nm-cloud-setup nmb openvpn@ ostree-remount pppoe pppoe-server rdisc rpcbind rpmconfigcheck
                  rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                  speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd tuned udisks2 upower wpa_supplicant@
  indirect        pcscd saned@ wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=e710f57a-f290-46a0-a58f-3ef44a1e3f08
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.55 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/sdb2      btrfs  445G   99G  346G  23% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL385 Gen11
    Product Family: ProLiant
    Serial:         DL385G11-006

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    9x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800
    15x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      1.40
   BIOS Date:         07/12/2023
   BIOS Revision:     1.40
   Firmware Revision: 1.40
```

Compiler Version Notes

```
==============================================================================================================
C              | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64`
526.blender_r: `-funsigned-char -DSPEC_LP64`
527.cam4_r: `-DSPEC_CASE_FLAG -DSPEC_LP64`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang
```

C++ benchmarks:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:
```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

(Continued on next page)

Peak Optimization Flags (Continued)

510.parest_r: `-m64 -flto -Wl,-mllvm -Wl,-suppress-fmas -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -mllvm -reduce-array-computations=3 -fepilog-vectorization-of-inductions -fvector-transform -fscalar-transform -lamdlibm -lamdalloc -lflang`

554.roms_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive -mllvm -reduce-array-computations=3 -fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc -lflang`

Benchmarks using both Fortran and C:

521.wrf_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -Mrecursive -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

(Continued on next page)

Peak Optimization Flags (Continued)

511.povray_r: `basepeak = yes`

526.blender_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -finline-aggressive -mllvm -unroll-threshold=100 -lamdlibm -lamdalloc`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.0.html
http://www.spec.org/cpu2017/flags/aocc400-flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.0.xml
http://www.spec.org/cpu2017/flags/aocc400-flags.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-08 10:18:23-0400.
Report generated on 2023-11-06 15:29:43 by CPU2017 PS formatter v6716.
Originally published on 2023-11-06.