



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_peak = 333

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Sep-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

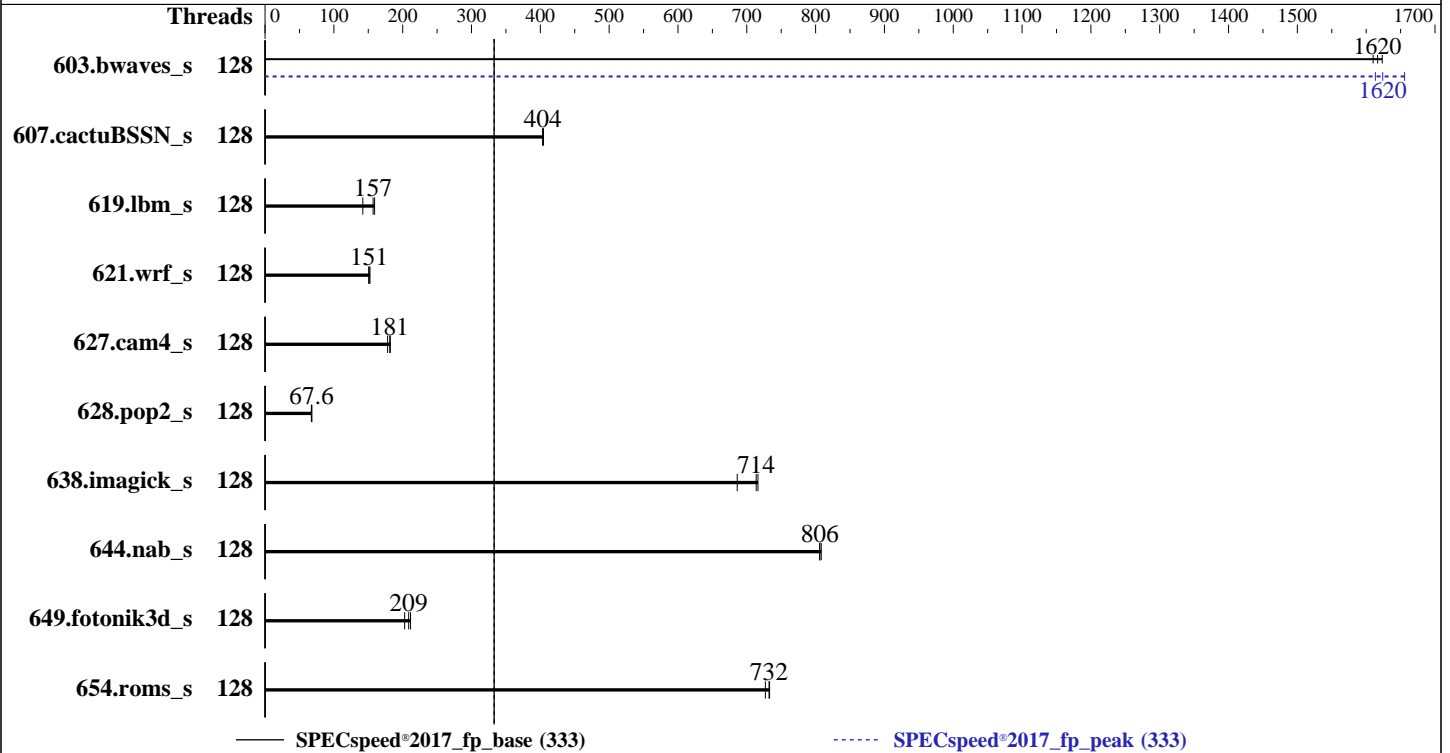

Hardware

CPU Name: Intel Xeon Platinum 8454H
 Max MHz: 3400
 Nominal: 2100
 Enabled: 128 cores, 4 chips
 Orderable: 1,2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 82.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 01.02.00.05 Released Jul-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_peak = 333

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: Jul-2023
Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|--------------------|-------------------|--------------------|--------------------|--------------------|--------------------|---------|--------------------|--------------------|--------------------|-------------------|--------------------|--------------------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 128 | 36.6 | 1610 | <u>36.5</u> | <u>1620</u> | 36.3 | 1620 | 128 | <u>36.3</u> | <u>1620</u> | 35.6 | 1660 | 36.6 | 1610 |
| 607.cactuBSSN_s | 128 | 41.2 | 405 | 41.3 | 403 | <u>41.3</u> | <u>404</u> | 128 | 41.2 | 405 | 41.3 | 403 | <u>41.3</u> | <u>404</u> |
| 619.lbm_s | 128 | 32.9 | 159 | 36.9 | 142 | <u>33.4</u> | <u>157</u> | 128 | 32.9 | 159 | 36.9 | 142 | <u>33.4</u> | <u>157</u> |
| 621.wrf_s | 128 | 86.7 | 152 | 87.8 | 151 | <u>87.4</u> | <u>151</u> | 128 | 86.7 | 152 | 87.8 | 151 | <u>87.4</u> | <u>151</u> |
| 627.cam4_s | 128 | 48.7 | 182 | 49.8 | 178 | <u>48.9</u> | <u>181</u> | 128 | 48.7 | 182 | 49.8 | 178 | <u>48.9</u> | <u>181</u> |
| 628.pop2_s | 128 | 175 | 68.0 | 176 | 67.3 | <u>176</u> | <u>67.6</u> | 128 | 175 | 68.0 | 176 | 67.3 | <u>176</u> | <u>67.6</u> |
| 638.imagick_s | 128 | 21.0 | 686 | 20.1 | 716 | <u>20.2</u> | <u>714</u> | 128 | 21.0 | 686 | 20.1 | 716 | <u>20.2</u> | <u>714</u> |
| 644.nab_s | 128 | <u>21.7</u> | <u>806</u> | 21.7 | 806 | 21.6 | 808 | 128 | <u>21.7</u> | <u>806</u> | 21.7 | 806 | 21.6 | 808 |
| 649.fotonik3d_s | 128 | 43.1 | 211 | 44.9 | 203 | <u>43.7</u> | <u>209</u> | 128 | 43.1 | 211 | 44.9 | 203 | <u>43.7</u> | <u>209</u> |
| 654.roms_s | 128 | 21.7 | 727 | <u>21.5</u> | <u>732</u> | 21.5 | 733 | 128 | 21.7 | 727 | <u>21.5</u> | <u>732</u> | 21.5 | 733 |

SPECspeed®2017_fp_base = **333**

SPECspeed®2017_fp_peak = **333**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/Uniautos/cpu2017/lib/intel64:/home/Uniautos/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Load Balance
Enable LP [Global] Set to Single LP

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_peak = 333

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: Jul-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Sysinfo program /home/Uniautos/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Sep 27 14:24:36 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 250 (250-6.e19_0)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent_hugepage
- 19. /sys/kernel/mm/transparent_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.e19_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
14:24:36 up 3:39, 0 users, load average: 5.42, 5.70, 3.43
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4125248
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECSpeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECSpeed®2017_fp_peak = 333

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: Jul-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

open files                (-n) 1024
pipe size                 (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes       (-u) 4125248
virtual memory           (kbytes, -v) unlimited
file locks                (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
/bin/sh ./run_speed.sh
runcpu --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=128
--tune base,peak -o all --define drop_caches fpspeed
runcpu --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define
cores=128 --tune base,peak --output_format all --define drop_caches --nopower --runmode speed --tune
base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.017/templogs/preenv.fpspeed.017.0.log --lognum 017.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/cpu2017

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8454H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 32
siblings      : 32
4 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 2: core ids 0-31
physical id 3: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
36,438,440,442,444,446
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

```

From lscpu from util-linux 2.37.4:
Architecture:      x86_64
CPU op-mode(s):   32-bit, 64-bit

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_peak = 333

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: Jul-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

Address sizes:          46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Platinum 8454H
BIOS Model name:       Intel(R) Xeon(R) Platinum 8454H
CPU family:            6
Model:                 143
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):              4
Stepping:              8
Frequency boost:       enabled
CPU max MHz:           2101.0000
CPU min MHz:           800.0000
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bml avx2
                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             4 MiB (128 instances)
L2 cache:              256 MiB (128 instances)
L3 cache:              330 MiB (4 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-31
NUMA node1 CPU(s):    32-63
NUMA node2 CPU(s):    64-95
NUMA node3 CPU(s):    96-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|------|----------|----------------|
| L1d | 48K | 6M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 4M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 256M | 16 | Unified | 2 | 2048 | 1 | 64 |

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_peak = 333

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: Jul-2023
Software Availability: Dec-2022

Platform Notes (Continued)

L3 82.5M 330M 15 Unified 3 90112 1 64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-31
node 0 size: 257273 MB
node 0 free: 256423 MB
node 1 cpus: 32-63
node 1 size: 258004 MB
node 1 free: 249669 MB
node 2 cpus: 64-95
node 2 size: 258041 MB
node 2 free: 257594 MB
node 3 cpus: 96-127
node 3 size: 258030 MB
node 3 free: 257638 MB
node distances:
node  0  1  2  3
  0: 10 21 21 21
  1: 21 10 21 21
  2: 21 21 10 21
  3: 21 21 21 10
```

9. /proc/meminfo

MemTotal: 1056101732 kB

10. who -r

run-level 3 Sep 27 10:45

11. Systemd service manager version: systemd 250 (250-6.el9_0)

```
Default Target Status
multi-user      degraded
```

12. Failed units, from systemctl list-units --state=failed

```
UNIT          LOAD  ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time
```

13. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd
                rsyslog selinux-autorelabel-mark sep5 sshd sssd systemd-network-generator tuned udisks2

enabled-runtime systemd-remount-fs

disabled       chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update
                nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@
                systemd-boot-check-no-failures systemd-pstore systemd-sysext

indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=UUID=058bdf1-c62b-4fad-8d41-5c40aa179007
ro
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_peak = 333

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: Jul-2023
Software Availability: Dec-2022

Platform Notes (Continued)

crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=b47f1685-a5fa-4d39-b2d7-e3f6e95ad499
nohz_full=1-72

15. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 2.10 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

18. /sys/kernel/mm/transparent_hugepage
defrag always defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

20. OS release
From /etc/*-release /etc/*-version

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_peak = 333

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: Jul-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
```

21. Disk information

SPEC is set to: /home/Uniautos/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda5 xfs 820G 55G 765G 7% /home

22. /sys/devices/virtual/dmi/id

Vendor: XFUSION
Product: 2488H V7
Product Family: EagleStream

23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

24. BIOS

(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 01.02.00.05
BIOS Date: 07/13/2023

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_peak = 333

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: Jul-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

```

=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_peak = 333

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: Jul-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_peak = 333

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: Jul-2023
Software Availability: Dec-2022

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes
638.imagick_s: basepeak = yes
644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-gopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes
654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes
627.cam4_s: basepeak = yes
628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 333

FusionServer 2488H V7 (Intel Xeon Platinum 8454H)

SPECspeed®2017_fp_peak = 333

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: Jul-2023
Software Availability: Dec-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-27 02:24:35-0400.
Report generated on 2023-10-25 10:32:51 by CPU2017 PDF formatter v6716.
Originally published on 2023-10-24.