SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

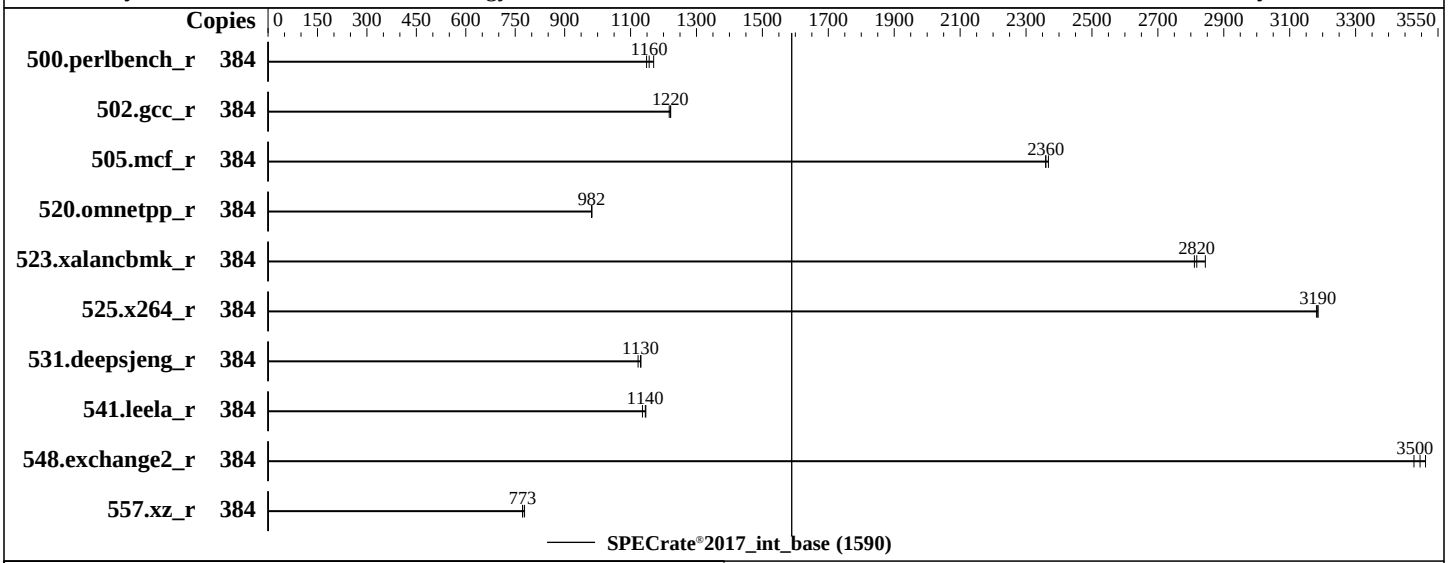

Hardware

CPU Name:	Intel Xeon Platinum 8468H
Max MHz:	3800
Nominal:	2100
Enabled:	192 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 960 GB M.2 NVME SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.1 (Plow) (x86_64) Kernel 5.14.0-162.6.1.el9_1.x86_64
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Lenovo BIOS Version RSE109C 3.10 released Sep-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	**529**	**1160**	522	1170	532	1150							
502.gcc_r	384	447	1220	445	1220	**445**	**1220**							
505.mcf_r	384	263	2360	**263**	**2360**	262	2370							
520.omnetpp_r	384	513	983	513	981	**513**	**982**							
523.xalancbmk_r	384	**144**	**2820**	143	2840	144	2810							
525.x264_r	384	211	3190	**211**	**3190**	211	3180							
531.deepsjeng_r	384	389	1130	392	1120	**389**	**1130**							
541.leela_r	384	560	1140	**555**	**1140**	555	1150							
548.exchange2_r	384	286	3510	**288**	**3500**	289	3480							
557.xz_r	384	533	778	537	772	**537**	**773**							

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.9-ic2023.0-2/lib/intel64:/home/cpu2017-1.1.9-ic2023.0-2/lib/ia32:/home/cpu2017-1.1.
     9-ic2023.0-2/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
C-States set to Legacy
SNC set to SNC4
UPI Link Disable set to Minimum Number of Links Enabled
LLC Prefetch set to Disabled

 Sysinfo program /home/cpu2017-1.1.9-ic2023.0-2/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Tue Oct 10 00:30:45 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-12.el9_1)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-162.6.1.el9_1.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Sep 30 07:36:03 EDT 2022
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   00:30:45 up  8:05,  2 users,  load average: 81.17, 279.99, 343.34
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1      16:26    6:50m  0.96s  0.02s /bin/bash ./run_SR850V3.sh
  root     pts/0     17:36    6:51m  0.01s  0.01s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 8255404
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 8255404
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 /bin/bash ./run_SR850V3.sh
 /bin/bash ./run_SR850V3.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 -c
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base -o all intrate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 --configfile
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
   rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.155/templogs/preenv.intrate.155.0.log --lognum 155.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0-2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8468H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
```

(Continued on next page)

Platform Notes (Continued)

```
     stepping        : 8
     microcode       : 0x2b0004d0
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
     cpu cores       : 48
     siblings        : 96
     4 physical ids (chips)
     384 processors (hardware threads)
     physical id 0: core ids 0-47
     physical id 1: core ids 0-47
     physical id 2: core ids 0-47
     physical id 3: core ids 0-47
     physical id 0: apicids 0-95
     physical id 1: apicids 128-223
     physical id 2: apicids 256-351
     physical id 3: apicids 384-479
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          384
   On-line CPU(s) list:             0-383
   Vendor ID:                       GenuineIntel
   BIOS Vendor ID:                  Intel(R) Corporation
   Model name:                      Intel(R) Xeon(R) Platinum 8468H
   BIOS Model name:                 Intel(R) Xeon(R) Platinum 8468H
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              2
   Core(s) per socket:              48
   Socket(s):                       4
   Stepping:                        8
   BogoMIPS:                        4200.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                    invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                    tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
                                    smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                    cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                    arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                    vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                    bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                    tsxldtrk pconfig arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                    arch_capabilities
   Virtualization:                  VT-x
   L1d cache:                       9 MiB (192 instances)
   L1i cache:                       6 MiB (192 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
  L2 cache:                        384 MiB (192 instances)
  L3 cache:                        420 MiB (4 instances)
  NUMA node(s):                    16
  NUMA node0 CPU(s):               0-11,192-203
  NUMA node1 CPU(s):               12-23,204-215
  NUMA node2 CPU(s):               24-35,216-227
  NUMA node3 CPU(s):               36-47,228-239
  NUMA node4 CPU(s):               48-59,240-251
  NUMA node5 CPU(s):               60-71,252-263
  NUMA node6 CPU(s):               72-83,264-275
  NUMA node7 CPU(s):               84-95,276-287
  NUMA node8 CPU(s):               96-107,288-299
  NUMA node9 CPU(s):               108-119,300-311
  NUMA node10 CPU(s):              120-131,312-323
  NUMA node11 CPU(s):              132-143,324-335
  NUMA node12 CPU(s):              144-155,336-347
  NUMA node13 CPU(s):              156-167,348-359
  NUMA node14 CPU(s):              168-179,360-371
  NUMA node15 CPU(s):              180-191,372-383
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                   sequence
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1     64        1             64
     L1i       32K       6M    8 Instruction     1     64        1             64
     L2         2M     384M   16 Unified         2   2048        1             64
     L3       105M     420M   15 Unified         3 114688        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0-11,192-203
  node 0 size: 128680 MB
  node 0 free: 127311 MB
  node 1 cpus: 12-23,204-215
  node 1 size: 129018 MB
  node 1 free: 127964 MB
  node 2 cpus: 24-35,216-227
  node 2 size: 129018 MB
  node 2 free: 128001 MB
  node 3 cpus: 36-47,228-239
  node 3 size: 129018 MB
  node 3 free: 127967 MB
  node 4 cpus: 48-59,240-251
  node 4 size: 129018 MB
  node 4 free: 127985 MB
  node 5 cpus: 60-71,252-263
  node 5 size: 129018 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 5 free: 127985 MB
   node 6 cpus: 72-83,264-275
   node 6 size: 129018 MB
   node 6 free: 127990 MB
   node 7 cpus: 84-95,276-287
   node 7 size: 129018 MB
   node 7 free: 127995 MB
   node 8 cpus: 96-107,288-299
   node 8 size: 129018 MB
   node 8 free: 127987 MB
   node 9 cpus: 108-119,300-311
   node 9 size: 129018 MB
   node 9 free: 127994 MB
   node 10 cpus: 120-131,312-323
   node 10 size: 129018 MB
   node 10 free: 128010 MB
   node 11 cpus: 132-143,324-335
   node 11 size: 129018 MB
   node 11 free: 127999 MB
   node 12 cpus: 144-155,336-347
   node 12 size: 129018 MB
   node 12 free: 127995 MB
   node 13 cpus: 156-167,348-359
   node 13 size: 129018 MB
   node 13 free: 127991 MB
   node 14 cpus: 168-179,360-371
   node 14 size: 129018 MB
   node 14 free: 127983 MB
   node 15 cpus: 180-191,372-383
   node 15 size: 128949 MB
   node 15 free: 127885 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
     0:  10  12  12  12  21  21  21  21  31  31  31  31  21  21  21  21
     1:  12  10  12  12  21  21  21  21  31  31  31  31  21  21  21  21
     2:  12  12  10  12  21  21  21  21  31  31  31  31  21  21  21  21
     3:  12  12  12  10  21  21  21  21  31  31  31  31  21  21  21  21
     4:  21  21  21  21  10  12  12  12  21  21  21  21  31  31  31  31
     5:  21  21  21  21  12  10  12  12  21  21  21  21  31  31  31  31
     6:  21  21  21  21  12  12  10  12  21  21  21  21  31  31  31  31
     7:  21  21  21  21  12  12  12  10  21  21  21  21  31  31  31  31
     8:  31  31  31  31  21  21  21  21  10  12  12  12  21  21  21  21
     9:  31  31  31  31  21  21  21  21  12  10  12  12  21  21  21  21
    10:  31  31  31  31  21  21  21  21  12  12  10  12  21  21  21  21
    11:  31  31  31  31  21  21  21  21  12  12  12  10  21  21  21  21
    12:  21  21  21  21  31  31  31  31  21  21  21  21  10  12  12  12
    13:  21  21  21  21  31  31  31  31  21  21  21  21  12  10  12  12
    14:  21  21  21  21  31  31  31  31  21  21  21  21  12  12  10  12
    15:  21  21  21  21  31  31  31  31  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2113423960 kB

------------------------------------------------------------
10. who -r
  run-level 3 Oct 9 16:26

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-12.el9_1)
```

(Continued on next page)

Platform Notes (Continued)

```
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                               LOAD   ACTIVE SUB    DESCRIPTION
  * dnf-makecache.service              loaded failed failed dnf makecache
  * NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online
  * systemd-sysctl.service             loaded failed failed Apply Kernel Variables

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                   dbus-broker getty@ irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname
                   rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd
                   systemd-network-generator tuned udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
                   chrony-wait console-getty cpupower debug-shell firewalld kvm_stat
                   man-db-restart-cache-update nftables pesign rdisc rhsm rhsm-facts rpmdb-rebuild
                   serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
  generated        ntp_sync
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd3,gpt3)/boot/vmlinuz-5.14.0-162.6.1.el9_1.x86_64
  root=UUID=43a7f1b1-66b0-456a-8c3f-451305a00281
  ro
  resume=UUID=58de1c40-542f-453b-bb6a-6bbd3510660a

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.1 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.1 (Plow)
  system-release Red Hat Enterprise Linux release 9.1 (Plow)

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0-2
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p4 xfs   819G   28G  791G   4% /home

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR850 V3
    Product Family: ThinkSystem
    Serial:         None

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    7x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
    3x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
    3x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
    6x Samsung M321R8GA0BB0-CQKVE 64 GB 2 rank 4800
    13x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800


------------------------------------------------------------
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Vendor:       Lenovo
    BIOS Version:      RSE109C-3.10
    BIOS Date:         09/26/2023
    BIOS Revision:     3.10
    Firmware Revision: 3.10
```

Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-09 12:30:45-0400.
Report generated on 2024-01-29 18:13:58 by CPU2017 PS formatter v6716.
Originally published on 2023-11-07.