



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573


Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

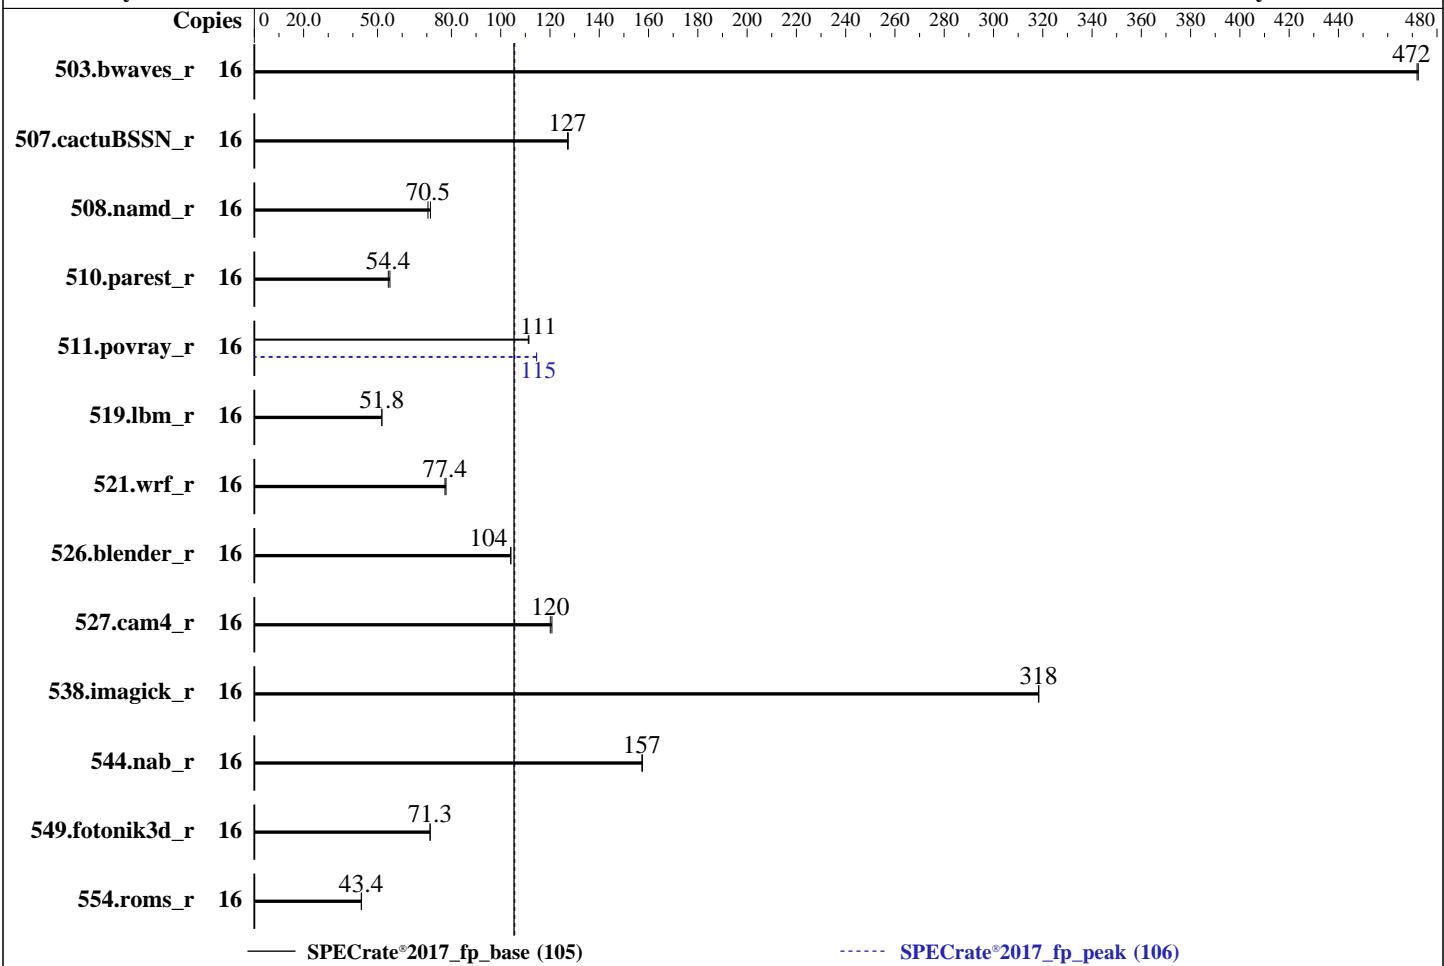

Hardware		Software	
CPU Name:	Intel Xeon E-2478	OS:	SUSE Linux Enterprise Server 15 SP4
Max MHz:	5200		5.14.21-150400.22-default
Nominal:	2800	Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	8 cores, 1 chip, 2 threads/core		Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Orderable:	1 chip	Parallel:	No
Cache L1:	32 KB I + 48 KB D on chip per core	Firmware:	Version 0.4.2 released Sep-2023
L2:	2 MB I+D on chip per core	File System:	tmpfs
L3:	24 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)	Peak Pointers:	64-bit
Storage:	40 GB on tmpfs	Other:	jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	340	472	<u>340</u>	<u>472</u>			16	340	472	<u>340</u>	<u>472</u>				
507.cactusBSSN_r	16	159	127	<u>159</u>	<u>127</u>			16	159	127	<u>159</u>	<u>127</u>				
508.namd_r	16	<u>216</u>	<u>70.5</u>	213	71.5			16	<u>216</u>	<u>70.5</u>	213	71.5				
510.parest_r	16	761	55.0	<u>770</u>	<u>54.4</u>			16	761	55.0	<u>770</u>	<u>54.4</u>				
511.povray_r	16	<u>336</u>	<u>111</u>	335	111			16	<u>326</u>	<u>115</u>	326	115				
519.lbm_r	16	<u>326</u>	<u>51.8</u>	326	51.8			16	<u>326</u>	<u>51.8</u>	326	51.8				
521.wrf_r	16	<u>463</u>	<u>77.4</u>	461	77.8			16	<u>463</u>	<u>77.4</u>	461	77.8				
526.blender_r	16	234	104	<u>234</u>	<u>104</u>			16	234	104	<u>234</u>	<u>104</u>				
527.cam4_r	16	<u>233</u>	<u>120</u>	232	121			16	<u>233</u>	<u>120</u>	232	121				
538.imagick_r	16	<u>125</u>	<u>318</u>	125	318			16	<u>125</u>	<u>318</u>	125	318				
544.nab_r	16	<u>171</u>	<u>157</u>	171	158			16	<u>171</u>	<u>157</u>	171	158				
549.fotonik3d_r	16	874	71.4	<u>874</u>	<u>71.3</u>			16	874	71.4	<u>874</u>	<u>71.3</u>				
554.roms_r	16	584	43.5	<u>586</u>	<u>43.4</u>			16	584	43.5	<u>586</u>	<u>43.4</u>				

SPECrate®2017_fp_base = 105

SPECrate®2017_fp_peak = 106

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3 > /proc/sys/vm/drop_caches
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

 DIMM Self Healing on
 Uncorrectable Memory Error : Disabled

 Virtualization Technology : Disabled
 LLC Prefetch : Disabled
 Dead Line LLC Alloc : Disabled

 System Profile : Custom
 CPU Power Management : Maximum Performance
 C1E : Disabled
 C States : Autonomous
 PCI ASPM L1 Link
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sun Oct 29 12:34:14 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```
1. uname -a
Linux localhost.localdomain 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022
(49db222) x86_64 x86_64 x86_64 GNU/Linux

2. w
12:34:14 up 3:11, 1 user, load average: 13.71, 15.53, 15.84
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 09:23 3:10m 1.38s 0.00s /bin/bash ./dell-run-speccpu.sh rate
--define DL-BIOSinc=Dell-BIOS_Xeon-4E.inc --define DL-BIOS-LogProc=1 --define DL-VERS=v4.8 --output_format
html,pdf,txt

3. Username
From environment variable $USER: root

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 256441
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 256441
virtual memory            (kbytes, -v) unlimited
file locks                (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd linux --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4E.inc --define DL-BIOS-LogProc=1
--define DL-VERS=v4.8 --output_format html,pdf,txt
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4E.inc --define DL-BIOS-LogProc=1
--define DL-VERS=v4.8 --output_format html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 -c
ic2023.0-lin-core-avx2-rate-20221201.cfg --define smt-on --define cores=8 --define physicallogical
--define no-numa --tune base,peak -o all --define drop_caches --define DL-LQC=1 --iterations 2 --define
DL-BIOSinc=Dell-BIOS_Xeon-4E.inc --define DL-BIOS-LogProc=1 --define DL-VERS=v4.8 --output_format
html,pdf,txt fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 --configfile
ic2023.0-lin-core-avx2-rate-20221201.cfg --define smt-on --define cores=8 --define physicallogical
--define no-numa --tune base,peak --output_format all --define drop_caches --define DL-LQC=1 --iterations
2 --define DL-BIOSinc=Dell-BIOS_Xeon-4E.inc --define DL-BIOS-LogProc=1 --define DL-VERS=v4.8
--output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size reframe fprate --nopreenv
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```
--note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

```
-----  
6. /proc/cpuinfo  
model name      : Intel(R) Xeon(R) E E-2478  
vendor_id       : GenuineIntel  
cpu family     : 6  
model          : 183  
stepping        : 1  
microcode       : 0x11f  
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores      : 8  
siblings        : 16  
1 physical ids (chips)  
16 processors (hardware threads)  
physical id 0: core ids 0-7  
physical id 0: apicids 0-15
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

From lscpu from util-linux 2.37.2:

```
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Address sizes:         42 bits physical, 48 bits virtual  
Byte Order:            Little Endian  
CPU(s):                16  
On-line CPU(s) list:  0-15  
Vendor ID:             GenuineIntel  
Model name:            Intel(R) Xeon(R) E E-2478  
CPU family:            6  
Model:                 183  
Thread(s) per core:   2  
Core(s) per socket:   8  
Socket(s):            1  
Stepping:              1  
BogoMIPS:              5606.40  
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology  
nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor  
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic  
movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm  
3dnowprefetch cpuid_fault invpcid_single ssbd ibrs ibpb stibp  
ibrs_enhanced fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid rdseed  
adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves  
avx_vnni dtherm ida arat pln pts umip pku ospke waitpkg gfni vaes  
vpclmulqdq tme rdpid movdir64b fsrm md_clear serialize pconfig  
arch_lbr flush_lll arch_capabilities  
L1d cache:            384 KiB (8 instances)  
L1i cache:            256 KiB (8 instances)  
L2 cache:             16 MiB (8 instances)  
L3 cache:             24 MiB (1 instance)  
NUMA node(s):         1  
NUMA node0 CPU(s):    0-15
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Itlb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	2M	16M	16	Unified	2	2048	1	64
L3	24M	24M	12	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-15

node 0 size: 64134 MB

node 0 free: 54959 MB

node distances:

node 0

0: 10

9. /proc/meminfo

MemTotal: 65674044 kB

10. who -r

run-level 3 Oct 29 09:22

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online YaST2-Firstboot YaST2-Second-Stage apparmor auditt cron display-manager firewalld getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd purge-kernels rollback rsyslog smartd sshd wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	ModemManager accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyrd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievfd iscsi iscsi-init iscsid iscsiuiio issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nm-cloud-setup nmb ostree-remount postfix rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 upower wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant@
indirect	wickedd

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=ef117b4a-6c89-42a3-b0a0-2cc3fe661a68
linux
splash=silent
quiet
security=
mitigations=auto

14. cpupower frequency-info
analyzing CPU 0:
 Unable to determine current policy
 boost state support:
 Supported: yes
 Active: yes

15. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
 defrag always defer defer+madvise [madvise] never
 enabled [always] madvise never
 hugepage_pmd_size 2097152
 shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
 alloc_sleep_millisecs 60000
 defrag 1
 max_ptes_none 511
 max_ptes_shared 256
 max_ptes_swap 64
 pages_to_scan 4096
 scan_sleep_millisecs 10000

18. OS release

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

19. Disk information

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem      Type   Size  Used Avail Use% Mounted on
tmpfs          tmpfs   40G   4.2G   36G  11% /mnt/ramdisk
```

20. /sys/devices/virtual/dmi/id

```
Vendor:        Dell Inc.
Product:       PowerEdge R360
Product Family: PowerEdge
Serial:        R360SH8
```

21. dmidecode

```
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
```

Memory:

```
2x 002C00001201 MTC20C2085S1EC48BA1 32 GB 2 rank 4800, configured at 4400
```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:        Dell Inc.
BIOS Version:       0.4.2
BIOS Date:          09/28/2023
BIOS Revision:      0.4
```

Compiler Version Notes

```
C           | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
C++          | 508.namd_r(base, peak) 510.parest_r(base, peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
C++, C      | 511.povray_r(base, peak) 526.blender_r(base, peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactubSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactusBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.html
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.xml
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 105

PowerEdge R360 (Intel Xeon E-2478)

SPECrate®2017_fp_peak = 106

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-29 13:34:14-0400.

Report generated on 2024-02-16 11:32:43 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-14.