# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 5415+, 2.90GHz

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = Not Run

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Nov-2023
**Hardware Availability:** Mar-2023
**Software Availability:** Dec-2023

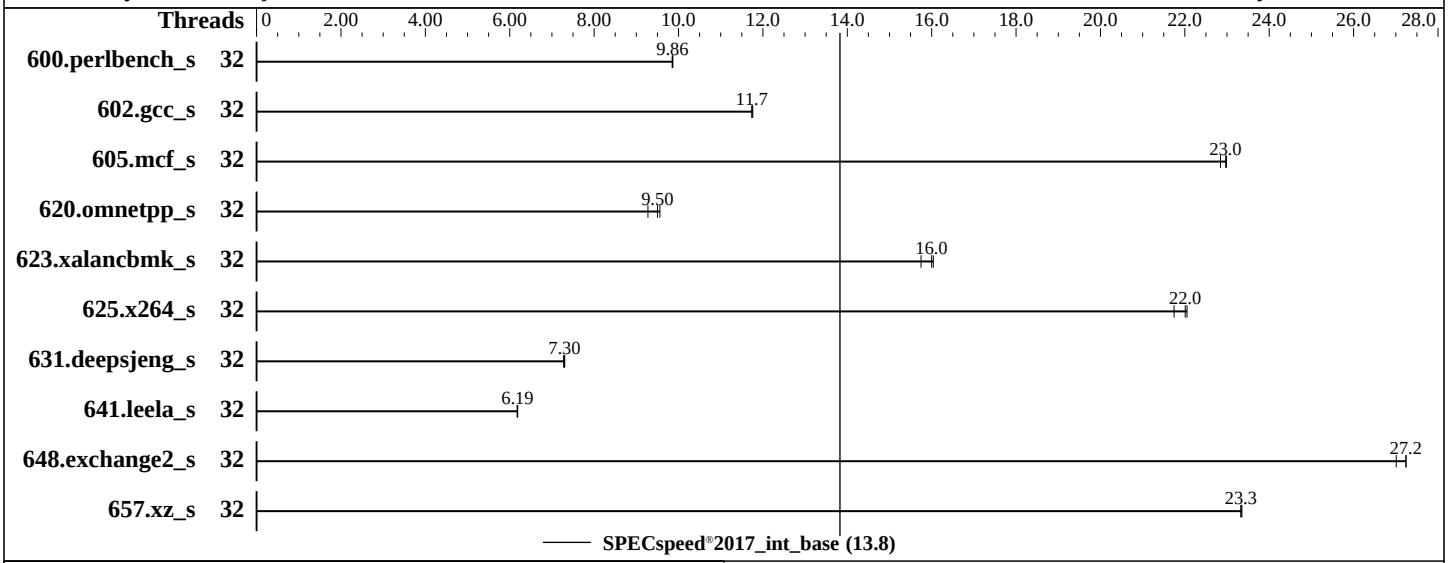


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 5415+ |
| Max MHz: | 4100 |
| Nominal: | 2900 |
| Enabled: | 16 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 22.5 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400) |
| Storage: | 1 x SATA SSD, 1.92TB |
| Other: | None |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default |
| Compiler: | C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux; |
| Parallel: | Yes |
| Firmware: | Fujitsu BIOS Version V1.0.0.0 R1.12.0 for D3982-A1x. Released Sep-2023 |
| File System: | btrfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 5415+, 2.90GHz

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = Not Run

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Nov-2023
**Hardware Availability:** Mar-2023
**Software Availability:** Dec-2023

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 32 | **180** | **9.86** | 180 | 9.86 | 180 | 9.85 | | | | | | | |
| 602.gcc_s | 32 | 339 | 11.8 | **339** | **11.7** | 339 | 11.7 | | | | | | | |
| 605.mcf_s | 32 | 207 | 22.8 | 205 | 23.0 | **206** | **23.0** | | | | | | | |
| 620.omnetpp_s | 32 | **172** | **9.50** | 171 | 9.56 | 176 | 9.28 | | | | | | | |
| 623.xalancbmk_s | 32 | 90.0 | 15.7 | 88.4 | 16.0 | **88.6** | **16.0** | | | | | | | |
| 625.x264_s | 32 | 80.0 | 22.1 | 81.1 | 21.7 | **80.1** | **22.0** | | | | | | | |
| 631.deepsjeng_s | 32 | **196** | **7.30** | 196 | 7.30 | 197 | 7.28 | | | | | | | |
| 641.leela_s | 32 | **276** | **6.19** | 276 | 6.19 | 276 | 6.18 | | | | | | | |
| 648.exchange2_s | 32 | **108** | **27.2** | 108 | 27.2 | 109 | 27.0 | | | | | | | |
| 657.xz_s | 32 | 265 | 23.3 | **265** | **23.3** | 265 | 23.4 | | | | | | | |

**SPECspeed®2017_int_base = 13.8**

**SPECspeed®2017_int_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
     "/home/Benchmark/speccpu_1.1.9/lib/intel64:/home/Benchmark/speccpu_1.1.9/lib/ia32:/home/Benchmark/spec
     cpu_1.1.9/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS configuration:
RdCur for XPT Prefetch = Enabled
Adjacent Cache Line Prefetch = Disabled
Package C State limit = C0
HWPM Support = Disabled
AVX P1 = Level2
CPU Performance Boost = Aggressive
FAN Control = Full

Sysinfo program /home/Benchmark/speccpu_1.1.9/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sun Nov 26 07:08:28 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   07:08:28 up 11:46,  2 users,  load average: 0.07, 0.04, 0.00
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                19:37   12:36   0.11s  0.11s -bash
  root     pts/0    10.118.160.104   07:08   11.00s  2.18s  0.40s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
```

(Continued on next page)

## Platform Notes (Continued)

```
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4125459
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4125459
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root@pts/0
 -bash
 -bash
 runcpu --define default-platform-flags -c ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=16
   --tune base -o all --define intspeedaffinity --define drop_caches --define smt-on intspeed
 runcpu --define default-platform-flags --configfile ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg
   --define cores=16 --tune base --output_format all --define intspeedaffinity --define drop_caches --define
   smt-on --nopower --runmode speed --tune base --size refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu_1.1.9

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Gold 5415+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 7
    microcode       : 0x2b0001b0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 8
    siblings        : 16
    2 physical ids (chips)
    32 processors (hardware threads)
    physical id 0: core ids 0-7
    physical id 1: core ids 0-7
    physical id 0: apicids 0-15
    physical id 1: apicids 128-143
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
```

(Continued on next page)

## Platform Notes (Continued)

```
  Byte Order:                      Little Endian
  CPU(s):                          32
  On-line CPU(s) list:             0-31
  Vendor ID:                       GenuineIntel
  Model name:                      Intel(R) Xeon(R) Gold 5415+
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              2
  Core(s) per socket:              8
  Socket(s):                       2
  Stepping:                        7
  Frequency boost:                 enabled
  CPU max MHz:                     1901.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        3800.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                   sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                   lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                   invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                   tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                                   avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                   xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                   cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                   arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                   vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                   bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                   tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  Virtualization:                  VT-x
  L1d cache:                       768 KiB (16 instances)
  L1i cache:                       512 KiB (16 instances)
  L2 cache:                        32 MiB (16 instances)
  L3 cache:                        45 MiB (2 instances)
  NUMA node(s):                    2
  NUMA node0 CPU(s):               0-7,16-23
  NUMA node1 CPU(s):               8-15,24-31
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     768K   12 Data            1    64        1             64
     L1i       32K     512K    8 Instruction     1    64        1             64
     L2         2M      32M   16 Unified         2  2048        1             64
     L3      22.5M      45M   15 Unified         3 24576        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
```


**(Continued on next page)**

## Platform Notes (Continued)

```
  available: 2 nodes (0-1)
  node 0 cpus: 0-7,16-23
  node 0 size: 515637 MB
  node 0 free: 513902 MB
  node 1 cpus: 8-15,24-31
  node 1 size: 515750 MB
  node 1 free: 515471 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056141816 kB

------------------------------------------------------------
10. who -r
  run-level 3 Nov 25 19:22

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                  irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog libvirtd lm_sensors
                  lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4
                  wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime systemd-remount-fs
  disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables exchange-bmc-os-info
                  fancontrol firewalld gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init iscsid
                  issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd
                  nfs nfs-blkmap nfs-server nfsserver rdisc rpcbind rpmconfigcheck rsyncd serial-getty@
                  smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnserve
                  systemd-boot-check-no-failures systemd-network-generator systemd-nspawn@ systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtnetworkd
                  virtnodedevd virtnwfilterd virtproxyd virtqemud virtsecretd virtstoraged
  indirect        pcscd virtlockd virtlogd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=d30c551f-4053-4d84-b193-d58b0e7f8e71
  splash=silent
  resume=/dev/disk/by-uuid/95d2bfb7-ef8a-4586-83dd-71dbdb19c4eb
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=321M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 1.90 GHz.
```

(Continued on next page)

## Platform Notes (Continued)

```
                  The governor "ondemand" may decide which speed to use
                  within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/Benchmark/speccpu_1.1.9
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/sda2      btrfs  781G   50G  731G   7% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         FUJITSU
    Product:        PRIMERGY RX2530 M7
```

(Continued on next page)

## Platform Notes (Continued)

```
     Product Family: SERVER
     Serial:         EWCDxxxxxx

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     2x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800, configured at 4400
     14x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800, configured at 4400


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       FUJITSU
    BIOS Version:      V1.0.0.0 R1.12.0 for D3982-A1x
    BIOS Date:         09/26/2023
    BIOS Revision:     1.12
    Firmware Revision: 2.0
```

## Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Fortran benchmarks:
ifx

## Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevD.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.



Tested with SPEC CPU®2017 v1.1.9 on 2023-11-25 17:08:27-0500.
Report generated on 2023-12-20 13:10:01 by CPU2017 PS formatter v6716.
Originally published on 2023-12-20.