



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 292

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

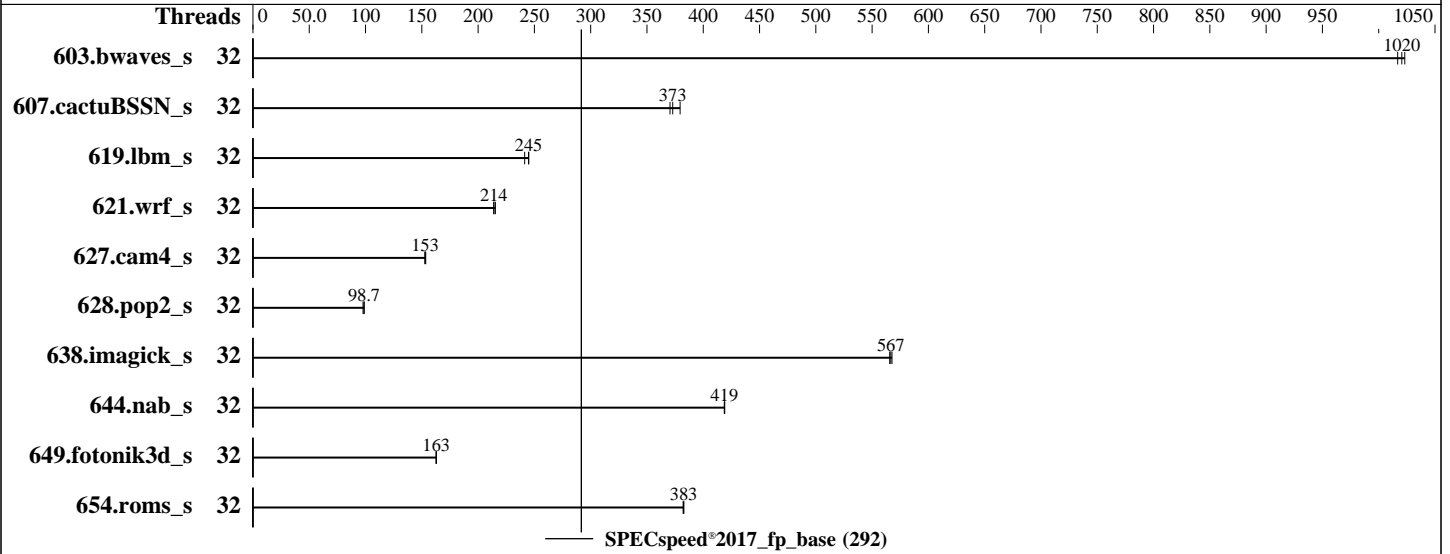

### Hardware

CPU Name: Intel Xeon Gold 6544Y  
 Max MHz: 4100  
 Nominal: 3600  
 Enabled: 32 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 45 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version ESE121V 3.10 released Jan-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 292

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	<b><u>57.8</u></b>	<b><u>1020</u></b>	58.0	1020	57.7	1020							
607.cactuBSSN_s	32	43.9	379	45.0	370	<b><u>44.7</u></b>	<b><u>373</u></b>							
619.lbm_s	32	21.7	241	21.4	245	<b><u>21.4</u></b>	<b><u>245</u></b>							
621.wrf_s	32	61.8	214	61.4	215	<b><u>61.8</u></b>	<b><u>214</u></b>							
627.cam4_s	32	<b><u>57.9</u></b>	<b><u>153</u></b>	58.1	153	57.8	153							
628.pop2_s	32	<b><u>120</u></b>	<b><u>98.7</u></b>	120	98.8	121	97.8							
638.imagick_s	32	<b><u>25.5</u></b>	<b><u>567</u></b>	25.4	568	25.5	566							
644.nab_s	32	41.7	419	41.7	419	<b><u>41.7</u></b>	<b><u>419</u></b>							
649.fotonik3d_s	32	<b><u>56.0</u></b>	<b><u>163</u></b>	56.0	163	56.0	163							
654.roms_s	32	<b><u>41.2</u></b>	<b><u>383</u></b>	41.1	383	41.2	382							

SPECspeed®2017\_fp\_base = 292

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 292

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

C-States set to Legacy  
Hyper-Threading set to Disabled  
Adjacent Cache Prefetch set to Disabled  
AMP Prefetch set to Enable

Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sun Feb 4 13:24:06 2024

SUT (System Under Test) info as seen by some common utilities.

### ----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----  
2. w  
13:24:06 up 31 min, 1 user, load average: 13.25, 25.30, 23.82  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 12:54 29:42 0.74s 0.00s /bin/bash ./speccpu\_ny.sh

-----  
3. Username  
From environment variable \$USER: root

-----  
4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4127081

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 292

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 4127081
virtual memory         (kbytes, -v) unlimited
file locks              (-x) unlimited

```

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./speccpu_ny.sh
/bin/bash ./speccpu_ny.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=32 --tune base -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=32 --tune base --output_format all --define
  drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.251/templogs/preenv.fpspeed.251.0.log --lognum 251.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

```

#### 6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) GOLD 6544Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 16
siblings       : 16

```

```

2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30
physical id 1: apicids 128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Vendor ID: GenuineIntel

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 292

ThinkSystem SR630 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

Model name:                INTEL(R) XEON(R) GOLD 6544Y
CPU family:                6
Model:                    207
Thread(s) per core:       1
Core(s) per socket:      16
Socket(s):                2
Stepping:                 2
BogoMIPS:                 7200.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                          clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                          lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                          nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                          ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                          sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                          lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                          invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                          vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                          bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                          avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                          xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                          cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                          avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                          avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                          cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                          arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:           VT-x
L1d cache:                1.5 MiB (32 instances)
L1i cache:                1 MiB (32 instances)
L2 cache:                 64 MiB (32 instances)
L3 cache:                 90 MiB (2 instances)
NUMA node(s):             2
NUMA node0 CPU(s):        0-15
NUMA node1 CPU(s):        16-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:  Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:      Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL  SETS  PHY-LINE  COHERENCY-SIZE
L1d   48K    1.5M   12 Data          1     64     1         64
L1i   32K     1M     8 Instruction    1     64     1         64
L2    2M     64M   16 Unified       2   2048     1         64
L3   45M    90M   15 Unified       3 49152     1         64

```

```

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0-15
node 0 size: 515722 MB
node 0 free: 514683 MB
node 1 cpus: 16-31
node 1 size: 516071 MB
node 1 free: 514293 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 292

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

node distances:

```
node 0 1
0: 10 21
1: 21 10
```

9. /proc/meminfo  
MemTotal: 1056557080 kB

10. who -r  
run-level 3 Feb 4 12:53

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated	ntp_sync
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=efe3d3bb-d17b-48bc-af3c-7ee429916327  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 292

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

vm.dirty_expire_centisecs    3000
vm.dirty_ratio               20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold         500
vm.min_unmapped_ratio        1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   894G  141G  753G  16% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR630 V3 MB,EGS,DDR5,NY,1U
Product Family: ThinkSystem
Serial:          1234567890

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:

```

```

13x Samsung M321R8GA0PB0-CWMMKH 64 GB 2 rank 5600, configured at 5200
3x Samsung M321R8GA0PB0-CWMMXH 64 GB 2 rank 5600, configured at 5200

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 292

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: ESE121V-3.10  
BIOS Date: 01/09/2024  
BIOS Revision: 3.10  
Firmware Revision: 3.90

### Compiler Version Notes

=====  
C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icx

Fortran benchmarks:  
ifx

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_fp\_base = 292

ThinkSystem SR630 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 292

ThinkSystem SR630 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Feb-2024

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Feb-2024

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-04 00:24:05-0500.

Report generated on 2024-03-14 10:57:24 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-13.