



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

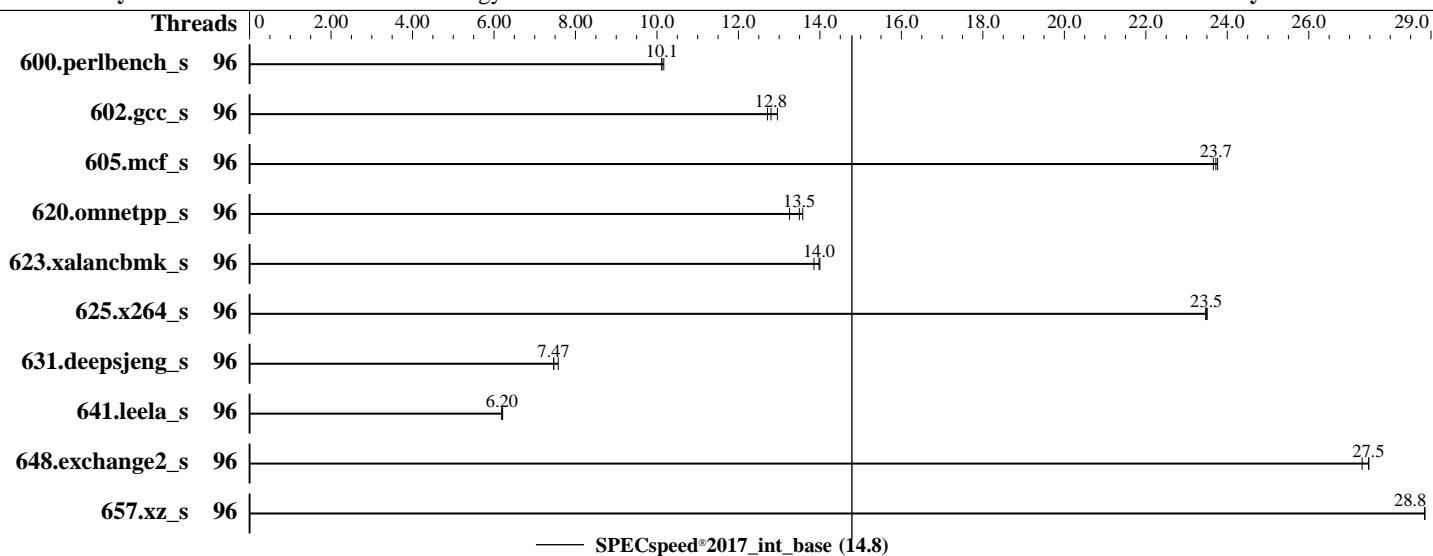

### Hardware

CPU Name: Intel Xeon Gold 6542Y  
Max MHz: 4100  
Nominal: 2900  
Enabled: 48 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 60 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)  
Storage: 1 x 960 GB SATA SSD  
Other: Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.2 (Plow)  
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
Parallel: Yes  
Firmware: Lenovo BIOS Version ESE121V 3.10 released Jan-2024  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	<u>175</u>	<b>10.1</b>	175	10.1	175	10.2							
602.gcc_s	96	313	12.7	<u>311</u>	<b>12.8</b>	307	13.0							
605.mcf_s	96	<u>199</u>	<b>23.7</b>	200	23.7	199	23.8							
620.omnetpp_s	96	<u>121</u>	<b>13.5</b>	123	13.3	120	13.6							
623.xalancbmk_s	96	<u>101</u>	<b>14.0</b>	102	13.9	101	14.0							
625.x264_s	96	<u>75.1</u>	<b>23.5</b>	75.2	23.5	75.0	23.5							
631.deepsjeng_s	96	189	7.58	<u>192</u>	<b>7.47</b>	192	7.46							
641.leela_s	96	276	6.19	275	6.21	<u>275</u>	<b>6.20</b>							
648.exchange2_s	96	<u>107</u>	<b>27.5</b>	107	27.5	108	27.3							
657.xz_s	96	<u>214</u>	<b>28.8</b>	214	28.8	214	28.8							

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/home/cpu2017-1.1.
    9-ic2023.2.3/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Platform Notes

### BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
C-states set to Legacy

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Feb 27 00:06:25 2024
```

SUT (System Under Test) info as seen by some common utilities.

---

### Table of contents

---

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 252 (252-13.el9\_2)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline
  15. cpupower frequency-info
  16. tuned-adm active
  17. sysctl
  18. /sys/kernel/mm/transparent\_hugepage
  19. /sys/kernel/mm/transparent\_hugepage/khugepaged
  20. OS release
  21. Disk information
  22. /sys/devices/virtual/dmi/id
  23. dmidecode
  24. BIOS
- 

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
00:06:25 up 1:13, 1 user, load average: 0.09, 0.02, 0.18
USER   TTY      LOGIN@    IDLE   JCPU   PCPU WHAT
root   ttys1     22:54   41.00s  0.77s  0.00s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Platform Notes (Continued)

```
file size          (blocks, -f) unlimited
pending signals   (-i) 4126991
max locked memory (kbytes, -l) 64
max memory size   (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size          (kbytes, -s) unlimited
cpu time            (seconds, -t) unlimited
max user processes (-u) 4126991
virtual memory     (kbytes, -v) unlimited
file locks          (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31  
login -- root  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags -c  
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=48 --tune base -o all --define  
intspeedaffinity --define smt-on --define drop_caches intspeed  
runcpu --nobuild --action validate --define default-platform-flags --configfile  
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=48 --tune base --output_format all  
--define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base  
--size refspeed intspeed --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.235/templogs/preenv.intspeed.235.0.log --lognum 235.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3
```

```
-----  
6. /proc/cpuinfo  
model name      : INTEL(R) XEON(R) GOLD 6542Y  
vendor_id        : GenuineIntel  
cpu family       : 6  
model           : 207  
stepping         : 2  
microcode        : 0x21000200  
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss  
cpu cores        : 24  
siblings          : 48  
2 physical ids (chips)  
96 processors (hardware threads)  
physical id 0: core ids 0-23  
physical id 1: core ids 0-23  
physical id 0: apicids 0-47  
physical id 1: apicids 128-175
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.4:  
Architecture:          x86_64  
CPU op-mode(s):       32-bit, 64-bit  
Address sizes:        46 bits physical, 57 bits virtual  
Byte Order:           Little Endian  
CPU(s):               96
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Platform Notes (Continued)

On-line CPU(s) list:

0-95

Vendor ID:

GenuineIntel

BIOS Vendor ID:

Intel(R) Corporation

Model name:

INTEL(R) XEON(R) GOLD 6542Y

BIOS Model name:

INTEL(R) XEON(R) GOLD 6542Y

CPU family:

6

Model:

207

Thread(s) per core:

2

Core(s) per socket:

24

Socket(s):

2

Stepping:

2

BogoMIPS:

5800.00

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtTopology  
nonstop\_tsc cpuid aperfmpfper tsc\_known\_freq pni pclmulqdq dtes64 monitor  
ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4\_1  
sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand  
lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cat\_12 cdp\_13  
invpcid\_single cdp\_12 ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow  
vnmi flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmi1 avx2 smep bmi2  
erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512fma  
clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsaved  
xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local avx\_vnni  
avx512\_bf16 wbnoinvd dtherm ida arat pln pts hfi avx512vbmi umip pku ospke  
waitpkg avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme  
avx512\_vpopcntdq la57 rdpid bus\_lock\_detect cldemote movdiri movdir64b  
enqcmd fsrm md\_clear serialize tsxlptrk pconfig arch\_lbr ibt amx\_bf16  
avx512\_fp16 amx\_tile amx\_int8 flush\_lld arch\_capabilities

Virtualization:

VT-x

L1d cache:

2.3 MiB (48 instances)

L1i cache:

1.5 MiB (48 instances)

L2 cache:

96 MiB (48 instances)

L3 cache:

120 MiB (2 instances)

NUMA node(s):

2

NUMA node0 CPU(s):

0-23,48-71

NUMA node1 CPU(s):

24-47,72-95

Vulnerability Itlb multihit:

Not affected

Vulnerability Llft:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec store bypass:

Mitigation: Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation: Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Platform Notes (Continued)

```
available: 2 nodes (0-1)
node 0 cpus: 0-23,48-71
node 0 size: 515749 MB
node 0 free: 513983 MB
node 1 cpus: 24-47,72-95
node 1 size: 516041 MB
node 1 free: 515132 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10

-----
9. /proc/meminfo
MemTotal:      1056553144 kB

-----
10. who -r
run-level 3 Feb 26 22:53

-----
11. Systemd service manager version: systemd 252 (252-13.el9_2)
Default Target      Status
multi-user          degraded

-----
12. Failed units, from systemctl list-units --state=failed
UNIT              LOAD ACTIVE SUB DESCRIPTION
* dnf-makecache.service loaded failed failed dnf makecache

-----
13. Services, from systemctl list-unit-files
STATE            UNIT FILES
enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth
                  chrony crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi
                  iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor
                  microcode multipathd nis-domainname nvmeffc-boot-connections rhsmcertd rsyslog rtkit-daemon
                  selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator
                  tuned udisks2 upower
enabled-runtime  systemd-remount-fs
disabled         arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown
                  canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell
                  dnf-system-upgrade iprdump iprinit iprupdate iscsid iscsiuioc kpatch kvm_stat ledmon
                  man-db-restart-cache-update nftables nvmf-autoconnect pesign psacct rdisc rhcd rhsm
                  rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
                  systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                  systemd-sysupdate-reboot

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd3,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Platform Notes (Continued)

15. cpupower frequency-info

```
analyzing CPU 0:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes
```

16. tuned-adm active

```
Current active profile: throughput-performance
```

17. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

18. /sys/kernel/mm/transparent\_hugepage

```
defrag      always defer defer+madvise [madvise] never  
enabled     [always] madvise never  
hpage_pmd_size 2097152  
shmem_enabled always within_size advise [never] deny force
```

19. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

20. OS release

```
From /etc/*-release /etc/*-version  
os-release Red Hat Enterprise Linux 9.2 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)  
system-release Red Hat Enterprise Linux release 9.2 (Plow)
```

21. Disk information

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	819G	54G	765G	7%	/home

-----  
22. /sys/devices/virtual/dmi/id

Vendor:	Lenovo
Product:	ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
Product Family:	ThinkSystem
Serial:	1234567890

-----  
23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

5x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 5200  
11x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 5200

-----  
24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	Lenovo
BIOS Version:	ESE121V-3.10
BIOS Date:	01/09/2024
BIOS Revision:	3.10
Firmware Revision:	3.90

## Compiler Version Notes

=====

C | 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base) 657.xz\_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++ | 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base) 641.leela\_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

Fortran | 648.exchange2\_s(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglesstream-AA.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglesstream-AA.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-27 00:06:25-0500.

Report generated on 2024-03-27 20:21:03 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-26.