



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 5515+)

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2022

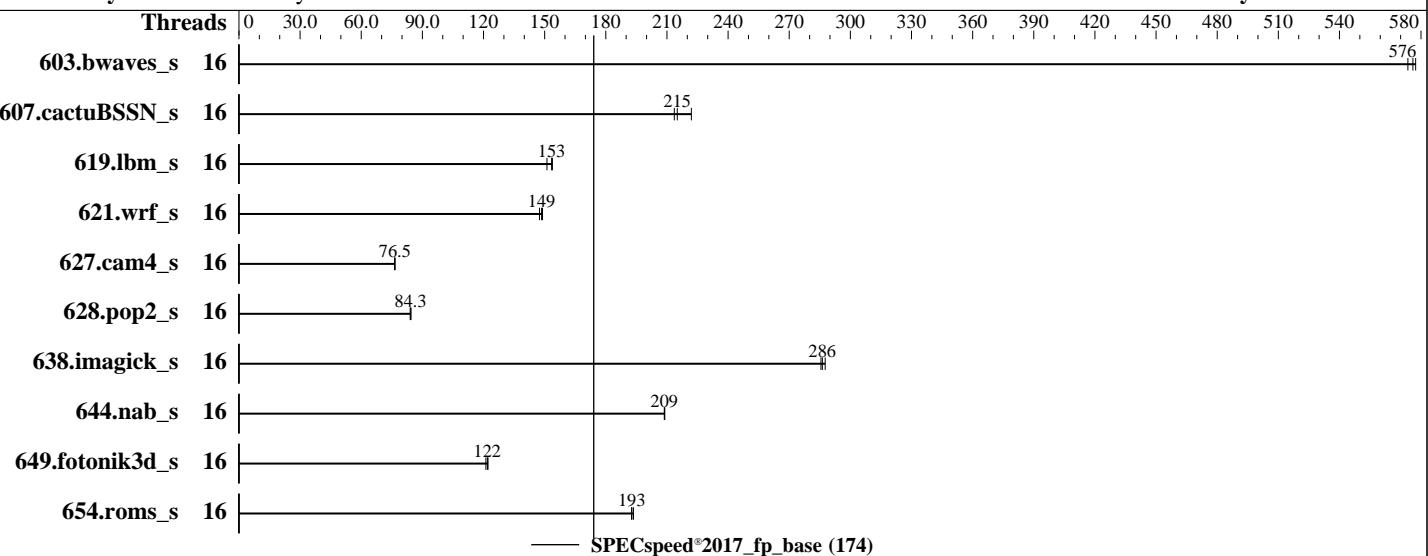

Hardware

CPU Name: Intel Xeon Gold 5515+
 Max MHz: 4100
 Nominal: 3200
 Enabled: 16 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 22.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
 Storage: 1 TB SATA SSDs 6Gb/s
 Other: Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 4.3.3a released Jan-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer power save with minimal impact on performance



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 5515+)

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds
603.bwaves_s	16	103	574	102	577	102	576							
607.cactuBSSN_s	16	77.5	215	75.1	222	78.0	214							
619.lbm_s	16	34.7	151	34.1	154	34.1	153							
621.wrf_s	16	88.8	149	89.7	147	89.1	149							
627.cam4_s	16	116	76.6	116	76.5	116	76.4							
628.pop2_s	16	141	84.0	141	84.3	141	84.4							
638.imagick_s	16	50.4	286	50.5	286	50.2	288							
644.nab_s	16	83.7	209	83.7	209	83.6	209							
649.fotonik3d_s	16	75.2	121	74.8	122	74.6	122							
654.roms_s	16	81.7	193	81.3	194	81.7	193							

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 5515+)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = Not Run

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2022

Platform Notes

BIOS settings:
Intel Hyper-Threading Technology set to Disabled
LLC Dead Line set to Disabled
LLC Prefetch set to Disabled
Enhanced CPU performance set to Auto
Processor C6 Report set to Enabled
ADDDC sparing set to Disabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on emr-x210m7 Fri Mar 1 10:11:45 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux emr-x210m7 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
10:11:45 up 1 min, 1 user, load average: 0.16, 0.07, 0.02
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttym1 - 10:11 9.00s 0.98s 0.11s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 5515+)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = Not Run

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2022

Platform Notes (Continued)

```
scheduling priority          (-e) 0
file size                  (blocks, -f) unlimited
pending signals             (-i) 4127052
max locked memory          (kbytes, -l) 64
max memory size            (kbytes, -m) unlimited
open files                 (-n) 1024
pipe size                  (512 bytes, -p) 8
POSIX message queues       (bytes, -q) 819200
real-time priority          (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes          (-u) 4127052
virtual memory              (kbytes, -v) unlimited
file locks                 (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=16
  --tune base -o all --define drop_caches fpspeed
runcpu --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define
  cores=16 --tune base -o output_format all --define drop_caches --nopower --runmode speed --tune base --size
  refspeed fpspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.022/templogs/preenv.fpspeed.022.0.log --lognum 022.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) GOLD 5515+
vendor_id       : GenuineIntel
cpu family     : 6
model          : 207
stepping        : 2
microcode       : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 8
siblings        : 8
2 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0,2,4,6,8,10,12,14
physical id 1: apicids 128,130,132,134,136,138,140,142
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:  0-15
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 5515+)

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2022

Platform Notes (Continued)

Vendor ID:	GenuineIntel
Model name:	INTEL(R) XEON(R) GOLD 5515+
CPU family:	6
Model:	207
Thread(s) per core:	1
Core(s) per socket:	8
Socket(s):	2
Stepping:	2
CPU max MHz:	4100.0000
CPU min MHz:	800.0000
BogoMIPS:	6400.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpfreq tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsavec cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16 amx_tile flush_lll arch_capabilities
Virtualization:	VT-x
L1d cache:	768 KiB (16 instances)
L1i cache:	512 KiB (16 instances)
L2 cache:	32 MiB (16 instances)
L3 cache:	45 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-7
NUMA node1 CPU(s):	8-15
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

```
From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K    768K   12 Data          1       64        1        64
  L1i     32K    512K    8 Instruction   1       64        1        64
  L2      2M     32M   16 Unified       2     2048        1        64
  L3    22.5M   45M   15 Unified       3    24576        1        64
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-7

node 0 size: 515708 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 5515+)

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Date: Mar-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
node 0 free: 514803 MB
node 1 cpus: 8-15
node 1 size: 516078 MB
node 1 free: 515708 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10

-----
9. /proc/meminfo
MemTotal:      1056549948 kB

-----
10. who -r
run-level 3 Mar 1 10:10

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target      Status
multi-user          running

-----
12. Services, from systemctl list-unit-files
STATE            UNIT FILES
enabled          YaST2-Firstboot YaST2-Second-Stage auditd cron getty@ haveged irqbalance issue-generator
                  kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections postfix purge-kernels rollback
                  rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                  firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load
                  lunmask man-db-create multipathd nfs nfs-blkmap nvmf-autoconnect rdisc rpcbind
                  rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice
                  systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd udisks2
indirect         wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=8d80b0cd-65b9-44c1-ac60-b6d545ca7460
splash=silent
mitigations=auto
quiet
security=

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
  The governor "performance" may decide which speed to use
  within this range.
  boost state support:
    Supported: yes
    Active: yes

-----
15. sysctl
kernel.numa_balancing
```

1

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 5515+)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = Not Run

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2022

Platform Notes (Continued)

```
kernel.randomize_va_space          2
vm.compaction_proactiveness       20
vm.dirty_background_bytes          0
vm.dirty_background_ratio          10
vm.dirty_bytes                     0
vm.dirty_expire_centisecs         3000
vm.dirty_ratio                    20
vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds       43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio             1
vm.nr_hugepages                   0
vm.nr_hugepages_mempolicy         0
vm.nr_overcommit_hugepages        0
vm.swappiness                      1
vm.watermark_boost_factor         15000
vm.watermark_scale_factor          10
vm.zone_reclaim_mode              0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
    defrag           [always] defer defer+madvise madvise never  
    enabled          [always] madvise never  
    hpage_pmd_size  2097152  
    shmem_enabled    always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
    alloc_sleep_millisecs   60000
    defrag                  1
    max_ptes_none           511
    max_ptes_shared          256
    max_ptes_swap            64
    pages_to_scan            4096
    scan_sleep_millisecs     10000
```

```
-----  
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----  
19. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sdb2        xfs   893G  29G  865G  4%  /
```

```
-----  
20. /sys/devices/virtual/dmi/id
    Vendor:          Cisco Systems Inc
    Product:         UCSX-210C-M7
    Serial:          FCH270978GR
```

```
-----  
21. dmidecode
    Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 5515+)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = Not Run

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2022

Platform Notes (Continued)

16x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Cisco Systems, Inc.
BIOS Version: X210M7.4.3.3a.0.0118241337
BIOS Date: 01/18/2024
BIOS Revision: 5.32

Compiler Version Notes

=====

C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactubSSN_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 5515+)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = Not Run

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 5515+)

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-EMR-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-EMR-revB.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-01 13:11:44-0500.

Report generated on 2024-03-27 20:32:06 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-26.