SPEC CPU®2017 Floating Point Rate Result

Fujitsu

PRIMERGY TX1330 M6,
Intel Xeon E-2436, 2.9 GHz

SPECrate®2017_fp_base = 88.4

SPECrate®2017_fp_peak = Not Run

CPU2017 License:	19	**Test Date:**	Apr-2024
Test Sponsor:	Fujitsu	**Hardware Availability:**	Apr-2024
Tested by:	Fujitsu	**Software Availability:**	Dec-2023

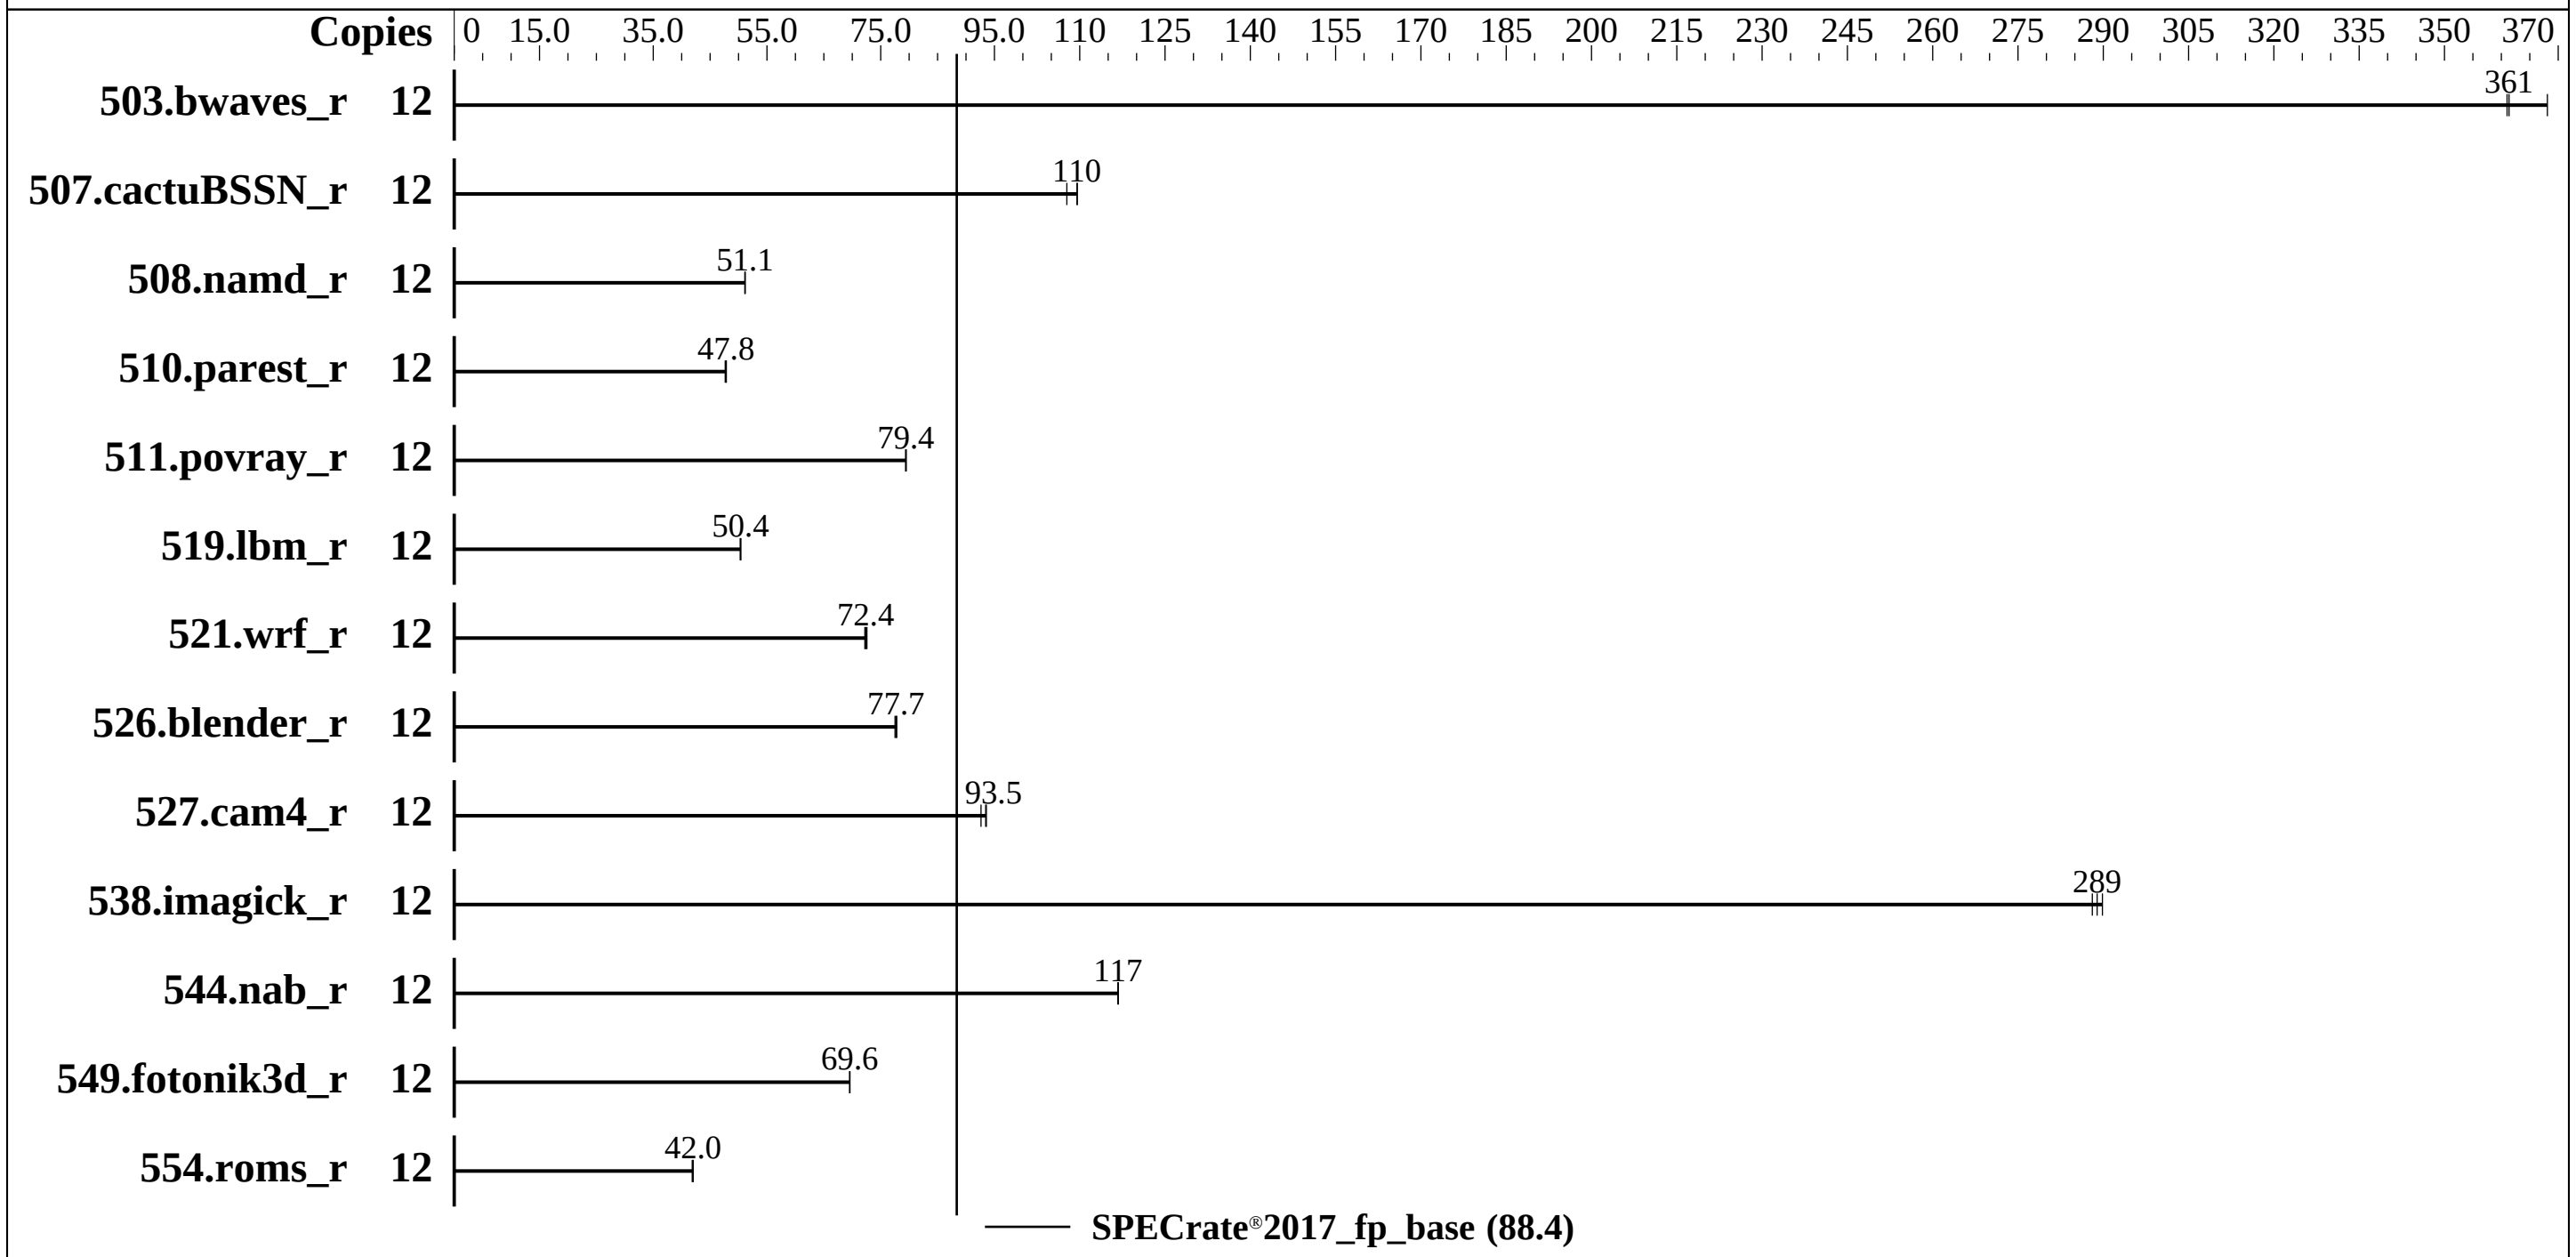

Hardware

CPU Name:	Intel Xeon E-2436
Max MHz:	5000
Nominal:	2900
Enabled:	6 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	18 MB I+D on chip per chip
Other:	None
Memory:	64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)
Storage:	1 x SATA M.2 SSD, 960 GB
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default
Compiler:	C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Fujitsu BIOS Version V5.0.0.27 R1.5.0 for D4132-A1x. Released Jul-2024 tested as V5.0.0.27 R1.0.0 for D4132-A1x Mar-2024
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	12	327	368	**333**	**361**	333	361							
507.cactuBSSN_r	12	141	108	139	110	**139**	**110**							
508.namd_r	12	223	51.2	223	51.1	**223**	**51.1**							
510.parest_r	12	656	47.9	**657**	**47.8**	659	47.7							
511.povray_r	12	353	79.4	**353**	**79.4**	353	79.5							
519.lbm_r	12	**251**	**50.4**	251	50.4	251	50.3							
521.wrf_r	12	**371**	**72.4**	370	72.6	372	72.2							
526.blender_r	12	**235**	**77.7**	236	77.5	235	77.8							
527.cam4_r	12	224	93.6	**225**	**93.5**	227	92.6							
538.imagick_r	12	**103**	**289**	103	290	104	288							
544.nab_r	12	**173**	**117**	173	117	173	117							
549.fotonik3d_r	12	672	69.6	**672**	**69.6**	672	69.6							
554.roms_r	12	454	42.0	**454**	**42.0**	456	41.9							

SPECrate®2017_fp_base = 88.4

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/Benchmark/speccpu.ic2024.0.2/lib/intel64:/home/Benchmark/speccpu.ic2024.0.2/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
C-State Auto Demotion = Disabled
CState Pre-Wake = Disabled
DMI Max Link Speed = Gen1
Fan Control = Full
Total Memory Encryption = Disabled


Sysinfo program /home/Benchmark/speccpu.ic2024.0.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Apr 27 01:20:33 2024

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   01:20:33 up  7:33,  1 user,  load average: 3.40, 9.30, 11.02
```

(Continued on next page)

Platform Notes (Continued)

```
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                17:50    7:13m  0.92s  0.11s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 254852
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 254852
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 -c
   ic2024.0.2-lin-core-avx2-rate-20231213.cfg --define smt-on --define cores=12 --define physicallogical
   --define no-numa --tune base -o all --define drop_caches fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 --configfile
   ic2024.0.2-lin-core-avx2-rate-20231213.cfg --define smt-on --define cores=12 --define physicallogical
   --define no-numa --tune base --output_format all --define drop_caches --nopower --runmode rate --tune base
   --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu.ic2024.0.2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) E E-2436
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 183
    stepping        : 1
    microcode       : 0x121
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 6
    siblings        : 12
    1 physical ids (chips)
    12 processors (hardware threads)
    physical id 0: core ids 0-5
    physical id 0: apicids 0-11
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 48 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          12
  On-line CPU(s) list:             0-11
  Vendor ID:                       GenuineIntel
  Model name:                      Intel(R) Xeon(R) E E-2436
  CPU family:                      6
  Model:                           183
  Thread(s) per core:              2
  Core(s) per socket:              6
  Socket(s):                       1
  Stepping:                        1
  CPU max MHz:                     6400.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        5836.80
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
                                   x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                   abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
                                   ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
                                   tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
                                   clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
                                   avx_vnni dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp
                                   hwp_pkg_req hfi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid
                                   movdiri movdir64b fsrm md_clear serialize pconfig arch_lbr flush_l1d
                                   arch_capabilities
  Virtualization:                  VT-x
  L1d cache:                       288 KiB (6 instances)
  L1i cache:                       192 KiB (6 instances)
  L2 cache:                        12 MiB (6 instances)
  L3 cache:                        18 MiB (1 instance)
  NUMA node(s):                    1
  NUMA node0 CPU(s):               0-11
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                   sequence
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     288K   12 Data            1    64        1             64
     L1i       32K     192K    8 Instruction     1    64        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
      L2         2M      12M   16 Unified         2  2048        1             64
      L3        18M      18M    9 Unified         3 32768        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 1 nodes (0)
   node 0 cpus: 0-11
   node 0 size: 63746 MB
   node 0 free: 63294 MB
   node distances:
   node   0
     0:  10

 ------------------------------------------------------------
 9. /proc/meminfo
    MemTotal:       65276752 kB

 ------------------------------------------------------------
 10. who -r
   run-level 3 Apr 26 17:48

 ------------------------------------------------------------
 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
   Default Target  Status
   multi-user      degraded

 ------------------------------------------------------------
 12. Failed units, from systemctl list-units --state=failed
     UNIT         LOAD   ACTIVE SUB    DESCRIPTION
   * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

 ------------------------------------------------------------
 13. Services, from systemctl list-unit-files
   STATE            UNIT FILES
   enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd chronyd cron display-manager getty@
                    haveged irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd
                    postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore wicked
                    wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
   enabled-runtime  systemd-remount-fs
   disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info firewalld gpm
                    grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                    man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                    smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                    systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                    vncserver@
   indirect         pcscd wickedd

 ------------------------------------------------------------
 14. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
   root=UUID=7d6282e3-8e21-4b62-ab94-5941e54159d1
   splash=silent
   mitigations=auto
   quiet
   security=apparmor
   crashkernel=235M,high
   crashkernel=72M,low
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 6.40 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing                0
  kernel.randomize_va_space            2
  vm.compaction_proactiveness         20
  vm.dirty_background_bytes            0
  vm.dirty_background_ratio           10
  vm.dirty_bytes                       0
  vm.dirty_expire_centisecs         3000
  vm.dirty_ratio                      20
  vm.dirty_writeback_centisecs       500
  vm.dirtytime_expire_seconds      43200
  vm.extfrag_threshold               500
  vm.min_unmapped_ratio                1
  vm.nr_hugepages                      0
  vm.nr_hugepages_mempolicy            0
  vm.nr_overcommit_hugepages           0
  vm.swappiness                       60
  vm.watermark_boost_factor        15000
  vm.watermark_scale_factor           10
  vm.zone_reclaim_mode                 0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP5

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/Benchmark/speccpu.ic2024.0.2
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      xfs   223G   98G  126G  44% /
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:         FUJITSU
     Product:        PRIMERGY TX1330 M6
     Product Family: SERVER
     Serial:         xxxxxxxxxx

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     2x Samsung M324R4GA3BB0-CQKOD 32 GB 2 rank 4800, configured at 4400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       FUJITSU // American Megatrends International, LLC.
    BIOS Version:      V5.0.0.27 R1.0.0 for D4132-A1x
    BIOS Date:         03/13/2024
    BIOS Revision:     1.0
```

Compiler Version Notes

```
==============================================================================================================
C                | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++              | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C           | 511.povray_r(base) 526.blender_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------

======================================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------

======================================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`

(Continued on next page)

Base Portability Flags (Continued)

521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RPL-RevA.html
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RPL-RevA.xml
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-26 12:20:33-0400.
Report generated on 2024-06-05 10:43:35 by CPU2017 PS formatter v6716.
Originally published on 2024-06-04.