



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

**SPECrate®2017\_int\_base = 264**

**SPECrate®2017\_int\_peak = 272**

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

**Test Date:** May-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

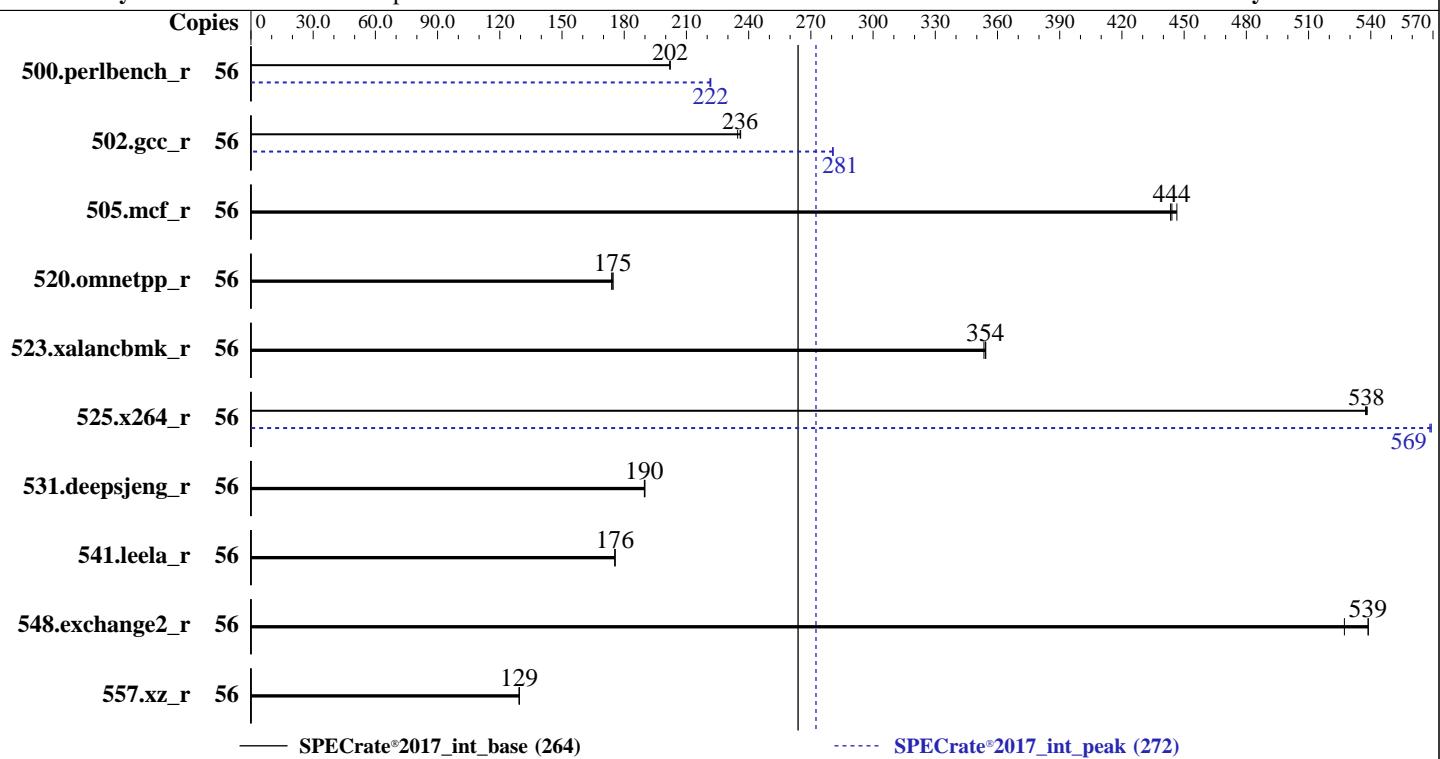

### Hardware

CPU Name: Intel Xeon Gold 5512U  
Max MHz: 3700  
Nominal: 2100  
Enabled: 28 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 52.5 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)  
Storage: 1 x 1.6 TB PCIe NVMe SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise High Performance Computing 15 SP5 (x86\_64)  
Compiler: Kernel 5.14.21-150500.53-default  
C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Version 2201 released Dec-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

SPECrate®2017\_int\_base = 264

SPECrate®2017\_int\_peak = 272

CPU2017 License: 9016

Test Date: May-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	56	441	202	<b>441</b>	<b>202</b>	441	202	56	<b>402</b>	<b>222</b>	402	222	403	221		
502.gcc_r	56	336	236	338	235	<b>336</b>	<b>236</b>	56	283	280	<b>283</b>	<b>281</b>	282	281		
505.mcf_r	56	204	443	203	446	<b>204</b>	<b>444</b>	56	204	443	203	446	<b>204</b>	<b>444</b>		
520.omnetpp_r	56	421	175	422	174	<b>421</b>	<b>175</b>	56	421	175	422	174	<b>421</b>	<b>175</b>		
523.xalancbmk_r	56	167	353	167	354	<b>167</b>	<b>354</b>	56	167	353	167	354	<b>167</b>	<b>354</b>		
525.x264_r	56	<b>182</b>	<b>538</b>	182	537	182	538	56	172	568	<b>172</b>	<b>569</b>	172	569		
531.deepsjeng_r	56	338	190	338	190	<b>338</b>	<b>190</b>	56	338	190	338	190	<b>338</b>	<b>190</b>		
541.leela_r	56	528	176	<b>528</b>	<b>176</b>	528	176	56	528	176	<b>528</b>	<b>176</b>	528	176		
548.exchange2_r	56	278	527	<b>272</b>	<b>539</b>	272	539	56	278	527	<b>272</b>	<b>539</b>	272	539		
557.xz_r	56	467	129	<b>467</b>	<b>129</b>	468	129	56	467	129	<b>467</b>	<b>129</b>	468	129		

SPECrate®2017\_int\_base = 264

SPECrate®2017\_int\_peak = 272

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/ic23u2/lib/intel64:/ic23u2/lib/ia32:/ic23u2/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

SPECrate®2017\_int\_base = 264

SPECrate®2017\_int\_peak = 272

CPU2017 License: 9016

Test Date: May-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

SNC = Enable SNC2 (2-clusters)

Engine Boost = Aggressive

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /ic23u2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue May 21 20:28:34 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
20:28:34 up 5:46, 1 user, load average: 41.59, 52.52, 54.51

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

SPECrate®2017\_int\_base = 264

SPECrate®2017\_int\_peak = 272

CPU2017 License: 9016

Test Date: May-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	14:43	5:45m	0.89s	0.01s	/bin/bash ./rate.sh

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

core file size	(blocks, -c)	unlimited
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	2062571
max locked memory	(kbytes, -l)	64
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	2062571
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./rate.sh
/bin/bash ./rate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=56 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=28 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=56 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=28 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size reffrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.259/templogs/preenv.intrate.259.0.log --lognum 259.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /ic23u2
```

### 6. /proc/cpuinfo

model name	:	INTEL(R) XEON(R) GOLD 5512U
vendor_id	:	GenuineIntel
cpu family	:	6
model	:	207
stepping	:	2
microcode	:	0x21000200
bugs	:	spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brsb
cpu cores	:	28
siblings	:	56
1 physical ids (chips)		
56 processors (hardware threads)		
physical id 0: core ids 0-27		
physical id 0: apicids 0-55		

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

SPECrate®2017\_int\_base = 264

SPECrate®2017\_int\_peak = 272

CPU2017 License: 9016

Test Date: May-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 46 bits physical, 57 bits virtual  
Byte Order: Little Endian  
CPU(s): 56  
On-line CPU(s) list: 0-55  
Vendor ID: GenuineIntel  
Model name: INTEL(R) XEON(R) GOLD 5512U  
CPU family: 6  
Model: 207  
Thread(s) per core: 2  
Core(s) per socket: 28  
Socket(s): 1  
Stepping: 2  
CPU max MHz: 3700.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4200.00  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good noopl xtopology nonstop\_tsc cpuid aperfmpfperf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cxl6 xtrp pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cat\_12 cdp\_13 invpcid\_single cdp\_12 ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 ertms invpcid rtm cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local avx\_vnni avx512\_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req avx512vbm1 umip pku ospke waitpkg avx512\_vbm12 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid bus\_lock\_detect cldemote movdiri movdir64b enqcmd fsrm md\_clear serialize tsxlptrk pconfig arch\_lbr avx512\_fp16 amx\_tile flush\_l1d arch\_capabilities  
Virtualization: VT-x  
L1d cache: 1.3 MiB (28 instances)  
L1i cache: 896 KiB (28 instances)  
L2 cache: 56 MiB (28 instances)  
L3 cache: 52.5 MiB (1 instance)  
NUMA node(s): 2  
NUMA node0 CPU(s): 0-13,28-41  
NUMA node1 CPU(s): 14-27,42-55  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence  
Vulnerability Srbds: Not affected

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

**SPECrate®2017\_int\_base = 264**

**SPECrate®2017\_int\_peak = 272**

**CPU2017 License:** 9016

**Test Date:** May-2024

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Dec-2023

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2023

## Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:  
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE  
L1d 48K 1.3M 12 Data 1 64 1 64  
L1i 32K 896K 8 Instruction 1 64 1 64  
L2 2M 56M 16 Unified 2 2048 1 64  
L3 52.5M 52.5M 15 Unified 3 57344 1 64

-----  
8. numactl --hardware  
NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 2 nodes (0-1)  
node 0 cpus: 0-13,28-41  
node 0 size: 257678 MB  
node 0 free: 256569 MB  
node 1 cpus: 14-27,42-55  
node 1 size: 257994 MB  
node 1 free: 256985 MB  
node distances:  
node 0 1  
0: 10 12  
1: 12 10

-----  
9. /proc/meminfo  
MemTotal: 528049124 kB

-----  
10. who -r  
run-level 3 May 21 14:42

-----  
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged  
irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections  
postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4  
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmiev  
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd ndctl-monitor nfs  
nfs-blkmap nvmmf-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@  
smartd\_generate\_opts snmpd snmptrapd svnserv systemd-boot-check-no-failures  
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned  
udisks2 vncserver@  
indirect wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=1821a225-9785-4821-9a33-99bd3ded8cae  
splash=silent

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

SPECrate®2017\_int\_base = 264

SPECrate®2017\_int\_peak = 272

CPU2017 License: 9016

Test Date: May-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
mitigations=auto
quiet
security=apparmor
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 3.70 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: latency-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs  500  
vm.dirtytime_expire_seconds   43200  
vm.extfrag_threshold          500  
vm.min_unmapped_ratio         1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy     0  
vm.nr_overcommit_hugepages    0  
vm.swappiness                  60  
vm.watermark_boost_factor     15000  
vm.watermark_scale_factor     10  
vm.zone_reclaim_mode          0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled   always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs  60000  
defrag               1  
max_ptes_none        511  
max_ptes_shared      256  
max_ptes_swap        64  
pages_to_scan        4096  
scan_sleep_millisecs 10000
```

```
-----  
19. OS release
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

SPECrate®2017\_int\_base = 264

SPECrate®2017\_int\_peak = 272

CPU2017 License: 9016

Test Date: May-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise High Performance Computing 15 SP5
```

---

20. Disk information

```
SPEC is set to: /ic23u2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p8  xfs   1.3T  103G  1.2T   9%  /
```

---

21. /sys/devices/virtual/dmi/id

```
Vendor:          ASUSTeK COMPUTER INC.
Product:         RS720-E11-RS12U
Product Family: Server
Serial:          R1S0MD000002
```

---

22. dmidecode

```
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
```

Memory:

```
8x Samsung M321R8GA0PB0-CWMXJ 64 GB 2 rank 5600, configured at 4800
```

---

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      American Megatrends Inc.
BIOS Version:    2201
BIOS Date:       12/22/2023
BIOS Revision:   22.1
```

## Compiler Version Notes

---

```
C | 502.gcc_r(peak)
```

---

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

---

```
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
```

---

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

---

```
C | 502.gcc_r(peak)
```

---

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

SPECrate®2017\_int\_base = 264

SPECrate®2017\_int\_peak = 272

CPU2017 License: 9016

Test Date: May-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Compiler Version Notes (Continued)

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

SPECrate®2017\_int\_base = 264

SPECrate®2017\_int\_peak = 272

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

SPECrate®2017\_int\_base = 264

SPECrate®2017\_int\_peak = 272

CPU2017 License: 9016

Test Date: May-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Peak Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.10 GHz, Intel Xeon Gold 5512U)

SPECrate®2017\_int\_base = 264

SPECrate®2017\_int\_peak = 272

CPU2017 License: 9016

Test Date: May-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.3.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.3.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-05-21 08:28:34-0400.

Report generated on 2024-07-03 09:26:24 by CPU2017 PDF formatter v6716.

Originally published on 2024-07-02.