SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Gold 6548Y+, 2.50 GHz)

SPECspeed®2017_fp_base = 353

SPECspeed®2017_fp_peak = 353

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Jul-2024
Hardware Availability: Jan-2024
Software Availability: Dec-2023

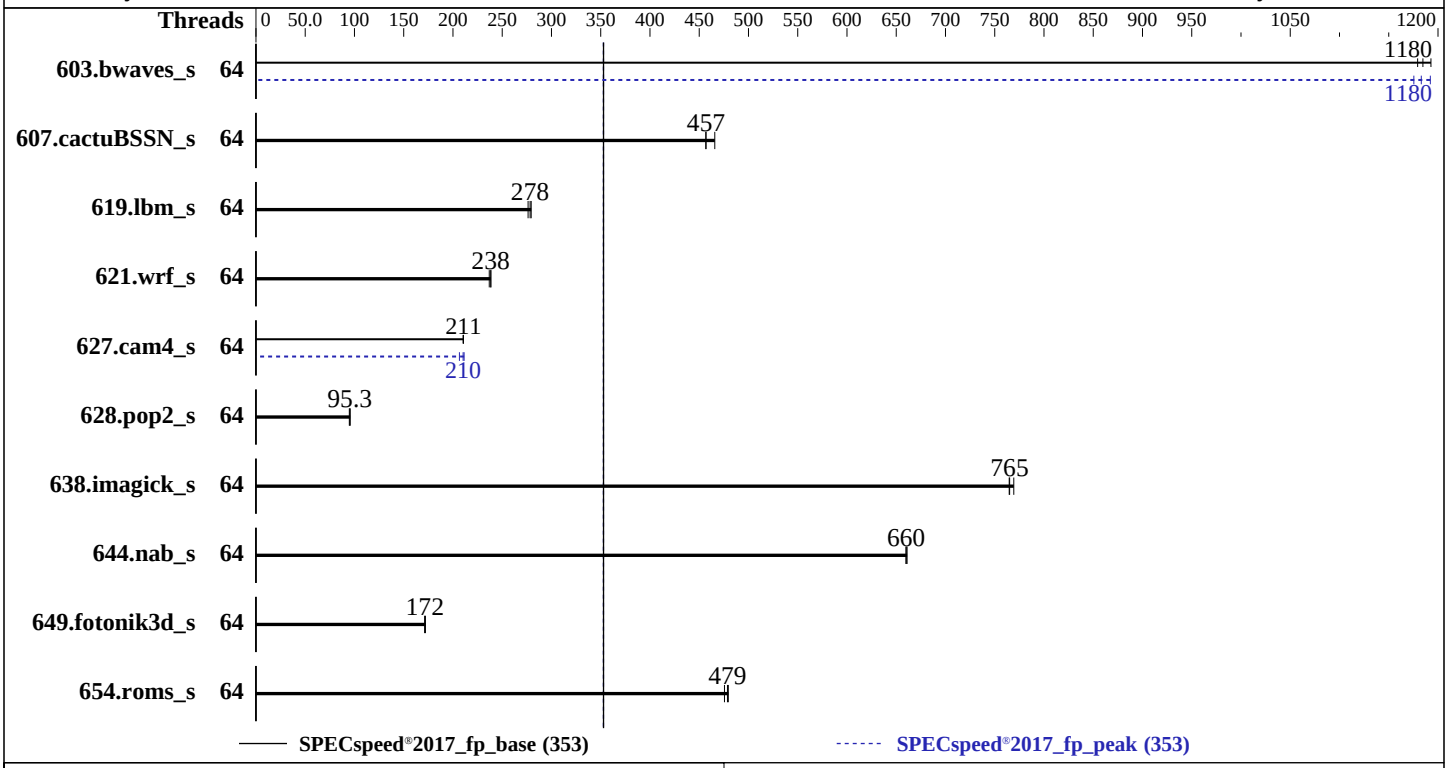

Hardware

CPU Name:	Intel Xeon Gold 6548Y+
Max MHz:	4100
Nominal:	2500
Enabled:	64 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	60 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)
Storage:	1 x 14 TB SATA HDD (7200 rpm)
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP5 5.14.21-150400.22-default
Compiler:	C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Nettrix BIOS Version NNH1041268 released Jan-2024
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Gold 6548Y+, 2.50 GHz)

SPECspeed®2017_fp_base = 353

SPECspeed®2017_fp_peak = 353

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Jul-2024
Hardware Availability: Jan-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	**49.8**	**1180**	49.5	1190	50.0	1180	64	50.2	1180	49.5	1190	**49.9**	**1180**
607.cactuBSSN_s	64	35.8	466	36.5	457	**36.5**	**457**	64	35.8	466	36.5	457	**36.5**	**457**
619.lbm_s	64	**18.8**	**278**	18.7	279	19.0	276	64	**18.8**	**278**	18.7	279	19.0	276
621.wrf_s	64	55.5	238	55.8	237	**55.5**	**238**	64	55.5	238	55.8	237	**55.5**	**238**
627.cam4_s	64	**42.1**	**211**	42.1	211	42.1	210	64	**42.1**	**210**	41.9	211	42.9	207
628.pop2_s	64	125	94.8	**125**	**95.3**	124	95.6	64	125	94.8	**125**	**95.3**	124	95.6
638.imagick_s	64	18.8	769	18.9	765	**18.9**	**765**	64	18.8	769	18.9	765	**18.9**	**765**
644.nab_s	64	26.5	660	**26.5**	**660**	26.4	661	64	26.5	660	**26.5**	**660**	26.4	661
649.fotonik3d_s	64	53.2	171	53.0	172	**53.1**	**172**	64	53.2	171	53.0	172	**53.1**	**172**
654.roms_s	64	**32.9**	**479**	32.8	480	33.1	476	64	**32.9**	**479**	32.8	480	33.1	476

SPECspeed®2017_fp_base = **353**

SPECspeed®2017_fp_peak = **353**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/tzk/SPECcpu/lib/intel64:/home/tzk/SPECcpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
  is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
  is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
  is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
  SNC (Sub NUMA) set to Enable SNC2 (2-clusters)
```

(Continued on next page)

Platform Notes (Continued)

```
  Patrol Scrub set to Disabled
  Hardware P-States set to Native Mode
  Enable LP [Global] set to Single LP

Sysinfo program /home/tzk/SPECcpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Jul  3 11:59:44 2024

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222/lp)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   11:59:44 up 17 min,  2 users,  load average: 2.47, 25.02, 19.61
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0    10.2.72.79       11:43    7.00s  0.96s  0.14s -bash
  root     pts/1    10.2.72.79       11:48   10:40   1.07s  1.04s ./ptat -mon -filter 0xf -moncpu 0 -l 1 -scr

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   pending signals                 (-i) 4125143
   max locked memory       (kbytes, -l) 64
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 4125143
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root@pts/0,pts/1
 -bash
 /bin/sh ./reportable-ic2024.0.2-lin-sapphirerapids-speed-smt-off-20231213.sh
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=64 --tune base,peak -o all --define
   drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=64 --tune base,peak --output_format all
   --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.620/templogs/preenv.fpspeed.620.0.log --lognum 620.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/tzk/SPECcpu

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : INTEL(R) XEON(R) GOLD 6548Y+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 207
    stepping        : 2
    microcode       : 0x21000200
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 32
    siblings        : 32
    2 physical ids (chips)
    64 processors (hardware threads)
    physical id 0: core ids 0-31
    physical id 1: core ids 0-31
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
    physical id 1: apicids
    128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
    80,182,184,186,188,190
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
```

(Continued on next page)

Platform Notes (Continued)

```
  Address sizes:                    52 bits physical, 57 bits virtual
  Byte Order:                       Little Endian
  CPU(s):                           64
  On-line CPU(s) list:              0-63
  Vendor ID:                        GenuineIntel
  Model name:                       INTEL(R) XEON(R) GOLD 6548Y+
  CPU family:                       6
  Model:                            207
  Thread(s) per core:               1
  Core(s) per socket:               32
  Socket(s):                        2
  Stepping:                         2
  Frequency boost:                  enabled
  CPU max MHz:                      2501.0000
  CPU min MHz:                      800.0000
  BogoMIPS:                         5000.00
  Flags:                            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                                    vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                    x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                    abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                    cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
                                    ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                                    rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                    intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                                    cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16
                                    wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
                                    avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                                    avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                    enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                    amx_tile flush_l1d arch_capabilities
  Virtualization:                   VT-x
  L1d cache:                        3 MiB (64 instances)
  L1i cache:                        2 MiB (64 instances)
  L2 cache:                         128 MiB (64 instances)
  L3 cache:                         120 MiB (2 instances)
  NUMA node(s):                     4
  NUMA node0 CPU(s):                0-15
  NUMA node1 CPU(s):                16-31
  NUMA node2 CPU(s):                32-47
  NUMA node3 CPU(s):                48-63
  Vulnerability Itlb multihit:      Not affected
  Vulnerability L1tf:               Not affected
  Vulnerability Mds:                Not affected
  Vulnerability Meltdown:           Not affected
  Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:         Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:              Not affected
  Vulnerability Tsx async abort:    Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       48K       3M   12 Data            1    64        1             64
      L1i       32K       2M    8 Instruction     1    64        1             64
      L2         2M     128M   16 Unified         2  2048        1             64
      L3        60M     120M   15 Unified         3 65536        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-15
  node 0 size: 258042 MB
  node 0 free: 256085 MB
  node 1 cpus: 16-31
  node 1 size: 257565 MB
  node 1 free: 256862 MB
  node 2 cpus: 32-47
  node 2 size: 258043 MB
  node 2 free: 254555 MB
  node 3 cpus: 48-63
  node 3 size: 257663 MB
  node 3 free: 256988 MB
  node distances:
  node   0   1   2   3
    0:  10  20  20  20
    1:  20  10  20  20
    2:  20  20  10  20
    3:  20  20  20  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056067508 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jul 3 11:42

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd chronyd cron cups firewalld getty@
                   haveged irqbalance issue-generator kbdsettings kdump kdump-early klog lm_sensors
                   lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                   wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         apcupsd autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates
                   chrony-wait console-getty corosync corosync-notifyd crm_mon ctdb cups-browsed debug-shell
                   dlm dmraid-activation drbd drbd-lvchange@ drbd-wait-promotable@ ebtables
                   exchange-bmc-os-info fancontrol gpm grub2-once haveged-switch-root hawk ipmi ipmievd
                   ipvsadm issue-add-ssh-keys kexec-load ldirectord logd lunmask lvmlockd lvmlocks
                   man-db-create multipathd nfs nfs-blkmap pacemaker rpcbind rpmconfigcheck rsyncd sanlock
                   sbd sbd_remote serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve
                   systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd tuned udisks2 wdmd
  indirect         wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=aec0cd35-b79c-432e-8a92-68e81aa94bbb
  splash=silent
```

(Continued on next page)

Platform Notes (Continued)

```
  resume=/dev/disk/by-uuid/d53caa22-ee5c-46fa-a8f2-44d678cc6069
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=317M,high
  crashkernel=72M,low
  default_hugepagesz=1G

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 2.50 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
```

(Continued on next page)

Platform Notes (Continued)

```
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release openSUSE Leap 15.5

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/tzk/SPECcpu
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda3      xfs    12T  290G   12T   3% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Nettrix
    Product:        R620 G50
    Product Family: Rack
    Serial:         6101810603447812

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Hynix HMCG94AGBRA179N 64 GB 2 rank 5600, configured at 5200


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      NNH1041268
   BIOS Date:         01/26/2024
   BIOS Revision:     5.32
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:
```
icx
```

Fortran benchmarks:
```
ifx
```

Benchmarks using both Fortran and C:
```
ifx icx
```

Benchmarks using Fortran, C, and C++:
```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.2024-07-30.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.2024-07-30.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-02 23:59:44-0400.
Report generated on 2024-07-30 19:30:05 by CPU2017 PS formatter v6716.
Originally published on 2024-07-30.