



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 6554S)

SPECrate®2017_int_base = 674

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

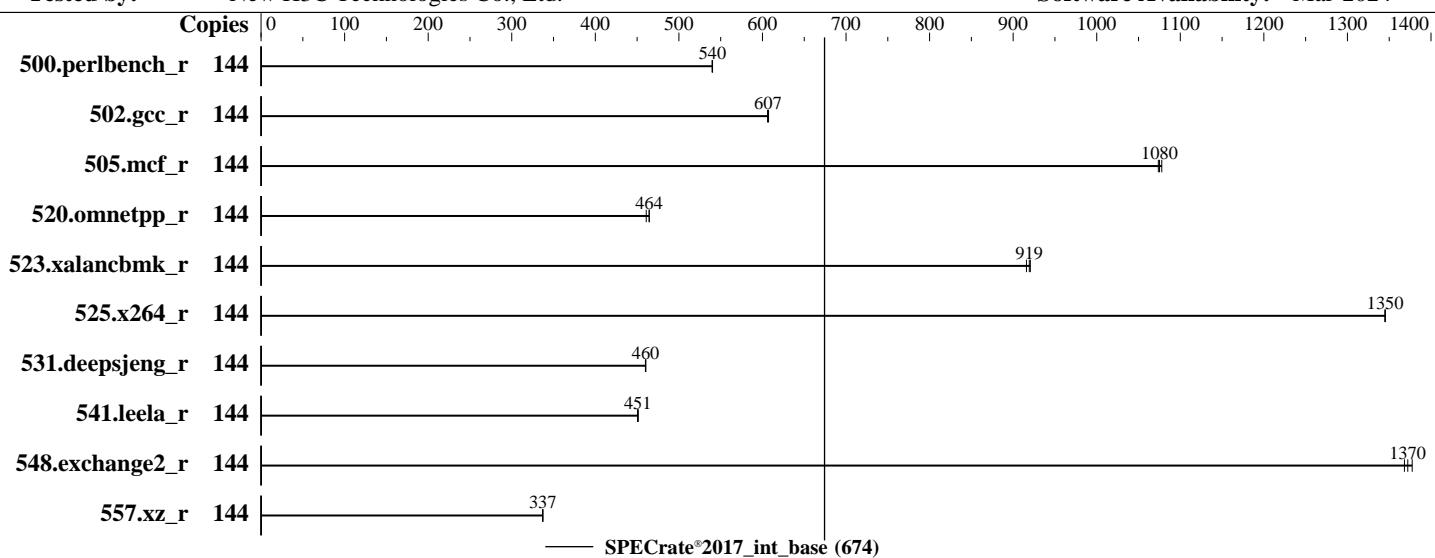

Hardware

CPU Name: Intel Xeon Gold 6554S
Max MHz: 4000
Nominal: 2200
Enabled: 72 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 180 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)
Storage: 1 x 6.4 TB NVME SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow 5.14.0-284.11.1.el9_2.x86_64)
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 6.10.43 released Jul-2024 BIOS
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 6554S)

SPECrate®2017_int_base = 674

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	424	540	425	540	424	540									
502.gcc_r	144	336	607	336	607	336	606									
505.mcf_r	144	216	1080	217	1070	216	1080									
520.omnetpp_r	144	410	461	407	465	407	464									
523.xalancbmk_r	144	166	916	165	919	165	921									
525.x264_r	144	187	1350	187	1350	187	1340									
531.deepsjeng_r	144	358	460	359	460	359	460									
541.leela_r	144	528	451	529	451	529	451									
548.exchange2_r	144	275	1370	276	1370	274	1380									
557.xz_r	144	461	337	461	337	462	337									

SPECrate®2017_int_base = 674

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 6554S)

SPECrate®2017_int_base = 674

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes

BIOS Settings:

SNC = Enable SNC2 (2-clusters)
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance

```
Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sun Aug 11 08:37:10 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. Systemd service manager version: systemd 252 (252-13.el9_2)
- 11. Services, from systemctl list-unit-files
- 12. Linux kernel boot-time arguments, from /proc/cmdline
- 13. cpupower frequency-info
- 14. tuned-adm active
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
08:37:10 up 1 min, 2 users, load average: 3.11, 1.57, 0.59
USER      TTY      LOGIN@      IDLE      JCPU      PCPU WHAT
root      pts/0      08:36    13.00s   1.19s  0.01s sh intrate.sh
root      pts/0      08:36    22.00s   0.04s  0.00s sh 6554s.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 6554S)

SPECrate®2017_int_base = 674

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes (Continued)

```
file size          (blocks, -f) unlimited
pending signals   (-i) 4126481
max locked memory (kbytes, -l) 64
max memory size   (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size          (kbytes, -s) unlimited
cpu time            (seconds, -t) unlimited
max user processes (-u) 4126481
virtual memory     (kbytes, -v) unlimited
file locks          (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31  
login -- root  
-bash  
sh intrate.sh  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 -c  
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=72 --define physicalfirst  
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 --configfile  
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=72 --define physicalfirst  
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode  
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile  
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/speccpu
```

```
-----  
6. /proc/cpuinfo  
model name      : INTEL(R) XEON(R) GOLD 6554S  
vendor_id        : GenuineIntel  
cpu family       : 6  
model           : 207  
stepping         : 2  
microcode        : 0x21000200  
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss  
cpu cores        : 36  
siblings         : 72  
2 physical ids (chips)  
144 processors (hardware threads)  
physical id 0: core ids 0-35  
physical id 1: core ids 0-35  
physical id 0: apicids 0-71  
physical id 1: apicids 128-199  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.4:  
Architecture:          x86_64  
CPU op-mode(s):       32-bit, 64-bit  
Address sizes:        52 bits physical, 57 bits virtual  
Byte Order:           Little Endian  
CPU(s):               144
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 6554S)

SPECrate®2017_int_base = 674

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes (Continued)

On-line CPU(s) list:

0-143

Vendor ID:

GenuineIntel

BIOS Vendor ID:

Intel(R) Corporation

Model name:

INTEL(R) XEON(R) GOLD 6554S

BIOS Model name:

INTEL(R) XEON(R) GOLD 6554S

CPU family:

6

Model:

207

Thread(s) per core:

2

Core(s) per socket:

36

Socket(s):

2

Stepping:

2

CPU max MHz:

4000.0000

CPU min MHz:

800.0000

BogoMIPS:

4400.00

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
 lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
 nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
 lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
 invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
 vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
 erms invpcid cqmq_rdt_a avx512f avx512dq rdseed adx smap avx512ifma
 clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
 xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local avx_vnni
 avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
 hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
 vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocpndq la57 rdpid
 bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize
 tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8
 flush_ll1d arch_capabilities

Virtualization:

VT-x

L1d cache:

3.4 MiB (72 instances)

L1i cache:

2.3 MiB (72 instances)

L2 cache:

144 MiB (72 instances)

L3 cache:

360 MiB (2 instances)

4

NUMA node(s):

0-17,72-89

NUMA node0 CPU(s):

18-35,90-107

NUMA node1 CPU(s):

36-53,108-125

NUMA node2 CPU(s):

54-71,126-143

Vulnerability Itlb multihit:

Not affected

Vulnerability Llft:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec store bypass:

Mitigation: Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation: Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 6554S)

SPECrate®2017_int_base = 674

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes (Continued)

L3

180M

360M 20 Unified

3 147456

1

64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0-17,72-89
node 0 size: 257616 MB
node 0 free: 256715 MB
node 1 cpus: 18-35,90-107
node 1 size: 258000 MB
node 1 free: 257176 MB
node 2 cpus: 36-53,108-125
node 2 size: 258039 MB
node 2 free: 257106 MB
node 3 cpus: 54-71,126-143
node 3 size: 258026 MB
node 3 free: 257262 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1056443484 kB

'who -r' did not return a run level

10. Systemd service manager version: systemd 252 (252-13.el9_2)

Default Target Status
multi-user starting

11. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvmefc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower vgaauthd vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq fancontrol fcoe grafana-server gssproxy httpd httpd@ ibacm iprdump iprinit iprule ipsec iscsid iscsiuio kpatch kvm_stat ledmon llppad man-db-restart-cache-update nfs-blkmap nfs-server nftables nmb nvmf-autoconnect ostree-readonly-sysroot-migration pesign pmfind pmie_farm pmlogger_farm pmproxy podman podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmbuild rrddcached saslauthd selinux-check-proper-disable serial-getty@ smb snmpd snmptrapd speech-dispatcher srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext target targetcid tog-pegasus trace-cmd vsftpd wpa_supplicant
indirect	pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 6554S)

SPECrate®2017_int_base = 674

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Platform Notes (Continued)

systemd-sysupdate systemd-sysupdate-reboot vsftpd@

```
-----  
12. Linux kernel boot-time arguments, from /proc/cmdline  
    BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64  
    root=/dev/mapper/rhel-root  
    ro  
    resume=/dev/mapper/rhel-swap  
    rd.lvm.lv=rhel/root  
    rd.lvm.lv=rhel/swap  
    rhgb  
    quiet  
    nohz_full=1-143  
    rcu_nocbs=1-143  
    console=tty0
```

```
-----  
13. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 4.00 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
14. tuned-adm active  
Current active profile: throughput-performance
```

```
-----  
15. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio     10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 40  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                   10  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor       10  
vm.zone_reclaim_mode            0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
    defrag           always defer defer+madvise [madvise] never  
    enabled          [always] madvise never  
    hpage_pmd_size  2097152  
    shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 6554S)

SPECrate®2017_int_base = 674

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)

19. Disk information
SPEC is set to: /home/speccpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 5.8T 152G 5.6T 3% /home

20. /sys/devices/virtual/dmi/id
Vendor: New H3C Technologies Co., Ltd.
Product: H3C UniServer R4900 G6 Ultra
Product Family: Rack
Serial: 210235A4CHH244000003

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Hynix HMCG94AGBRA179N 64 GB 2 rank 5600, configured at 5200

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 6.10.43
BIOS Date: 07/27/2024
BIOS Revision: 5.32

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 6554S)

SPECrate®2017_int_base = 674

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-fipa -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 6554S)

SPECrate®2017_int_base = 674

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-08-11 08:37:10-0400.

Report generated on 2024-08-29 10:51:19 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-27.