SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7 (AMD EPYC 9655)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = 1090

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Sep-2024

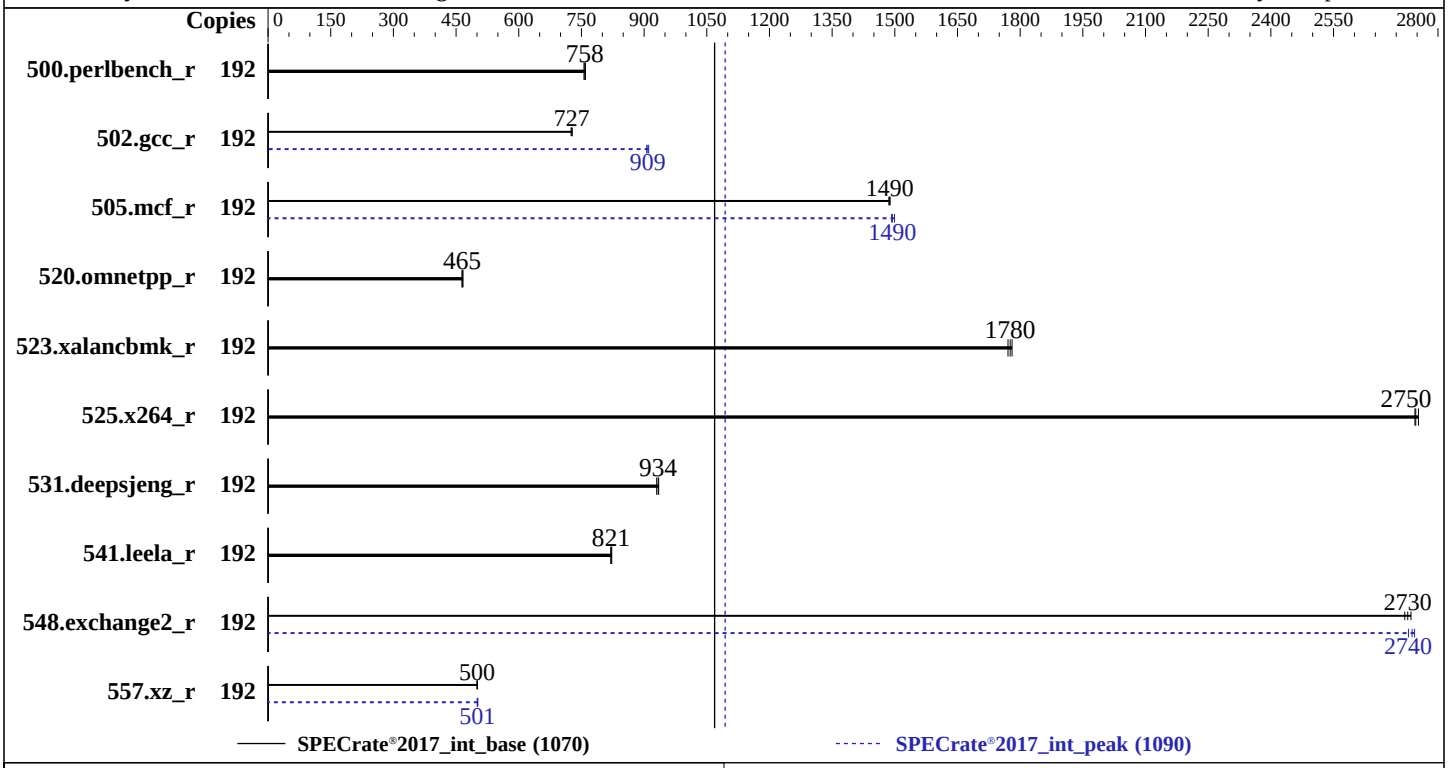

Hardware

CPU Name:	AMD EPYC 9655
Max MHz:	4500
Nominal:	2600
Enabled:	96 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
Storage:	1 x 7.68 TB NVME
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 24.04.1 LTS kernel version 6.8.0-41-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	Version 7.30.00P04 released Aug-2024
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G7 (AMD EPYC 9655)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = 1090

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	**403**	**758**	404	756	402	760	192	**403**	**758**	404	756	402	760
502.gcc_r	192	375	725	**374**	**727**	373	728	192	298	911	**299**	**909**	300	906
505.mcf_r	192	**209**	**1490**	208	1490	209	1490	192	207	1500	208	1490	**208**	**1490**
520.omnetpp_r	192	540	467	**542**	**465**	543	464	192	540	467	**542**	**465**	543	464
523.xalancbmk_r	192	114	1770	114	1780	**114**	**1780**	192	114	1770	114	1780	**114**	**1780**
525.x264_r	192	**122**	**2750**	122	2740	122	2750	192	**122**	**2750**	122	2740	122	2750
531.deepsjeng_r	192	**236**	**934**	237	930	235	935	192	**236**	**934**	237	930	235	935
541.leela_r	192	388	820	387	823	**387**	**821**	192	388	820	387	823	**387**	**821**
548.exchange2_r	192	185	2720	**184**	**2730**	184	2740	192	**184**	**2740**	184	2730	183	2740
557.xz_r	192	414	500	414	501	**414**	**500**	192	**414**	**501**	414	501	413	502

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = 1090

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/spec2017/amd_rate_aocc500_znver5_A_lib/lib:/home/spec2017/amd_rate_aocc500_znver5_A_lib/lib32:/
     usr/local/mpc-131/lib:/usr/local/gmp-630/lib:/usr/local/mpfr-421/lib:/usr/local/isl-027/lib:/usr/local
     /gcc-1420/lib64:/usr/local/lib:/usr/lib"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS settings:
cTDP Control: Manual
cTDP: 400
PPT Control: Manual
PPT: 400
Determinism Slider set to Power
NUMA nodes per socket: NPS4
IOMMU: Auto
SVM Mode: Disabled
ACPI SRAT L3 Cache As NUMA Domain: Enabled

 Sysinfo program /home/spec2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on h3c Sat Sep 28 17:19:49 2024

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
```

(Continued on next page)

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux h3c 6.8.0-41-generic #41-Ubuntu SMP PREEMPT_DYNAMIC Fri Aug  2 20:41:06 UTC 2024 x86_64 x86_64 x86_64
  GNU/Linux

------------------------------------------------------------
2. w
   17:19:49 up  1:58,  3 users,  load average: 0.13, 0.04, 0.01
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                15:22   13.00s  0.88s  0.06s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
  root             172.17.16.110    15:22    1:58m  0.00s  0.08s sshd: root@pts/0
  root             172.17.16.110    15:22    1:58m  0.00s  0.01s sshd: root@notty

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              3093763
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 python3 ./run_amd_rate_aocc500_znver5_A1.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/spec2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9655 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
```

(Continued on next page)

Platform Notes (Continued)

```
     stepping        : 1
     microcode       : 0xb00210e
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
     TLB size        : 192 4K pages
     cpu cores       : 96
     siblings        : 192
     1 physical ids (chips)
     192 processors (hardware threads)
     physical id 0: core ids 0-95
     physical id 0: apicids 0-191
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               192
   On-line CPU(s) list:                  0-191
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       Advanced Micro Devices, Inc.
   Model name:                           AMD EPYC 9655 96-Core Processor
   BIOS Model name:                      AMD EPYC 9655 96-Core Processor                 Unknown CPU @ 2.6GHz
   BIOS CPU family:                      107
   CPU family:                           26
   Model:                                2
   Thread(s) per core:                   2
   Core(s) per socket:                   96
   Socket(s):                            1
   Stepping:                             1
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   38%
   CPU max MHz:                          4509.3750
   CPU min MHz:                          1500.0000
   BogoMIPS:                             5193.14
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                         extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                         sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                         cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                         osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                         perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                         ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                         smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                         avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                         xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                         xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                         nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                         pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                         avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                         avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                         movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                         flush_l1d debug_swap
   L1d cache:                            4.5 MiB (96 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
  L1i cache:                           3 MiB (96 instances)
  L2 cache:                            96 MiB (96 instances)
  L3 cache:                            384 MiB (12 instances)
  NUMA node(s):                        12
  NUMA node0 CPU(s):                   0-7,96-103
  NUMA node1 CPU(s):                   8-15,104-111
  NUMA node2 CPU(s):                   16-23,112-119
  NUMA node3 CPU(s):                   24-31,120-127
  NUMA node4 CPU(s):                   32-39,128-135
  NUMA node5 CPU(s):                   40-47,136-143
  NUMA node6 CPU(s):                   48-55,144-151
  NUMA node7 CPU(s):                   56-63,152-159
  NUMA node8 CPU(s):                   64-71,160-167
  NUMA node9 CPU(s):                   72-79,168-175
  NUMA node10 CPU(s):                  80-87,176-183
  NUMA node11 CPU(s):                  88-95,184-191
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                       always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     4.5M   12 Data            1    64        1             64
     L1i       32K       3M    8 Instruction     1    64        1             64
     L2         1M      96M   16 Unified         2  1024        1             64
     L3        32M     384M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 12 nodes (0-11)
  node 0 cpus: 0-7,96-103
  node 0 size: 64045 MB
  node 0 free: 63412 MB
  node 1 cpus: 8-15,104-111
  node 1 size: 64506 MB
  node 1 free: 64251 MB
  node 2 cpus: 16-23,112-119
  node 2 size: 64463 MB
  node 2 free: 64208 MB
  node 3 cpus: 24-31,120-127
  node 3 size: 64506 MB
  node 3 free: 64300 MB
  node 4 cpus: 32-39,128-135
  node 4 size: 64506 MB
  node 4 free: 64256 MB
  node 5 cpus: 40-47,136-143
  node 5 size: 64506 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 5 free: 64329 MB
  node 6 cpus: 48-55,144-151
  node 6 size: 64506 MB
  node 6 free: 64286 MB
  node 7 cpus: 56-63,152-159
  node 7 size: 64506 MB
  node 7 free: 64314 MB
  node 8 cpus: 64-71,160-167
  node 8 size: 64506 MB
  node 8 free: 64304 MB
  node 9 cpus: 72-79,168-175
  node 9 size: 64506 MB
  node 9 free: 64312 MB
  node 10 cpus: 80-87,176-183
  node 10 size: 64506 MB
  node 10 free: 64296 MB
  node 11 cpus: 88-95,184-191
  node 11 size: 64444 MB
  node 11 free: 64249 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11
    0:  10  11  11  12  12  12  12  12  12  12  12  12
    1:  11  10  11  12  12  12  12  12  12  12  12  12
    2:  11  11  10  12  12  12  12  12  12  12  12  12
    3:  12  12  12  10  11  11  12  12  12  12  12  12
    4:  12  12  12  11  10  11  12  12  12  12  12  12
    5:  12  12  12  11  11  10  12  12  12  12  12  12
    6:  12  12  12  12  12  12  10  11  11  12  12  12
    7:  12  12  12  12  12  12  11  10  11  12  12  12
    8:  12  12  12  12  12  12  11  11  10  12  12  12
    9:  12  12  12  12  12  12  12  12  12  10  11  11
   10:  12  12  12  12  12  12  12  12  12  11  10  11
   11:  12  12  12  12  12  12  12  12  12  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792075556 kB

------------------------------------------------------------
10. who -r
  run-level 5 Sep 28 15:21

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local
                   console-setup e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback
                   keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi pollinate
                   secureboot-db setvtrgb snapd systemd-networkd systemd-networkd-wait-online systemd-pstore
                   systemd-resolved systemd-timesyncd thermald unattended-upgrades
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid serial-getty@ ssh systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-networkd-wait-online@
                   systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config
                   systemd-pcrlock-machine-id systemd-pcrlock-make-policy
```


(Continued on next page)

Platform Notes (Continued)

```
                  systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                  systemd-time-wait-sync upower
  indirect        systemd-sysupdate systemd-sysupdate-reboot
  masked          cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-6.8.0-41-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro
  iommu=pt

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 11:
    current policy: frequency should be within 1.50 GHz and 2.60 GHz.
                    The governor "schedutil" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  800MHz

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
```

(Continued on next page)

Platform Notes (Continued)

```
  max_ptes_swap             64
  pages_to_scan           4096
  scan_sleep_millisecs   10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.1 LTS

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/spec2017
  Filesystem                     Type  Size  Used Avail Use% Mounted on
  /dev/mapper/ubuntu--vg-ubuntu--lv ext4   98G   16G   77G  18% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         H3C
    Product:        R3950 G6
    Serial:         202311A3SFH20C000109

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    4x Samsung M321R8GA0EB2-CCPKC 64 GB 2 rank 6400, configured at 6000
    8x Samsung M321R8GA0EB2-CCPWC 64 GB 2 rank 6400, configured at 6000


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      7.30.00P04
   BIOS Date:         08/21/2024
   BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
```


(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
------------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Peak Portability Flags

500.perlbench_r: `-DSPEC_LINUX_X64 -DSPEC_LP64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LINUX -DSPEC_LP64`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl

Peak Other Flags

C benchmarks (except as noted below):
-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.1-Turin.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc500-flags.xml
http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.1-Turin.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-28 13:19:48-0400.
Report generated on 2024-10-23 13:32:16 by CPU2017 PS formatter v6716.
Originally published on 2024-10-23.