



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865


Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2022

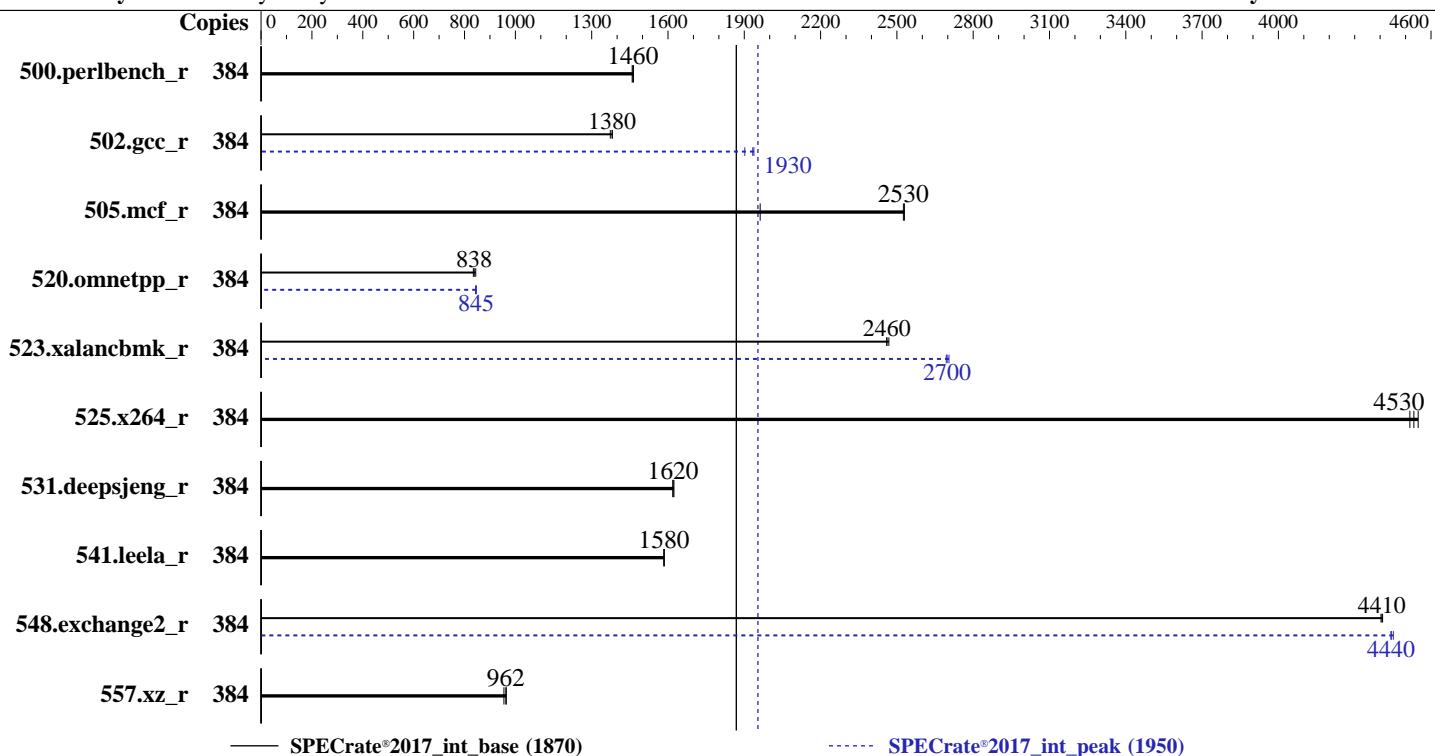

Hardware		Software	
CPU Name:	AMD EPYC 9684X	OS:	SUSE Linux Enterprise Server 15 SP4
Max MHz:	3700		5.14.21-150400.22-default
Nominal:	2550	Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Enabled:	192 cores, 2 chips, 2 threads/core	Parallel:	No
Orderable:	1,2 chips	Firmware:	Version 04.02.32 released May-2024
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	xfs
L2:	1 MB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	1152 MB I+D on chip per chip, 96 MB shared / 8 cores	Base Pointers:	64-bit
Other:	None	Peak Pointers:	32/64-bit
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)	Other:	None
Storage:	1 x 480 GB SSD	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.
Other:	CPU Cooling: Air		



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	418	1460	418	1460	419	1460	384	418	1460	418	1460	419	1460	419	1460
502.gcc_r	384	396	1370	394	1380	394	1380	384	281	1930	281	1940	286	1900		
505.mcf_r	384	316	1960	245	2530	246	2530	384	316	1960	245	2530	246	2530		
520.omnetpp_r	384	597	844	604	835	601	838	384	597	844	596	846	596	845		
523.xalancbmk_r	384	165	2460	165	2460	164	2470	384	150	2700	151	2690	150	2700		
525.x264_r	384	148	4530	149	4520	148	4550	384	148	4530	149	4520	148	4550		
531.deepsjeng_r	384	272	1620	272	1620	271	1620	384	272	1620	272	1620	271	1620		
541.leela_r	384	401	1580	402	1580	401	1580	384	401	1580	402	1580	401	1580		
548.exchange2_r	384	228	4410	228	4410	228	4400	384	226	4440	226	4450	226	4440		
557.xz_r	384	431	962	430	964	434	955	384	431	962	430	964	434	955		

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = 1950

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
 'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
 To enable THP for all allocations for peak runs,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/CPU2017/amd_rate_aocc400_znver4_A_lib/lib:/home/CPU2017/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

SVM Mode = disable

DRAM Scrub time = disable

NUMA nodes per socket = NPS4

Determinism Slider = Power

cTDP = 400

Package Power Limit = 400

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Aug 29 18:57:21 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

Platform Notes (Continued)

19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
18:57:21 up 2 min, 1 user, load average: 13.57, 5.90, 2.20
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttym1 - 18:56 25.00s 1.40s 0.24s /bin/bash ./amd_rate_aocc400_znver4_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 6190762
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 6190762
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.003/templogs/preenv.intrate.003.0.log --lognum 003.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/CPU2017

6. /proc/cpuinfo
model name : AMD EPYC 9684X 96-Core Processor
vendor_id : AuthenticAMD
cpu family : 25

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_int_base = 1870

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

Platform Notes (Continued)

```

model          : 17
stepping       : 2
microcode      : 0xa101244
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 96
siblings        : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        52 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               384
On-line CPU(s) list: 0-383
Vendor ID:            AuthenticAMD
Model name:           AMD EPYC 9684X 96-Core Processor
CPU family:           25
Model:                17
Thread(s) per core:  2
Core(s) per socket:  96
Socket(s):            2
Stepping:             2
Frequency boost:     enabled
CPU max MHz:         3715.4290
CPU min MHz:         1500.0000
BogoMIPS:             5092.49
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                     clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                     constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl
                     pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                     popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                     abm sse4a misalignsns 3dnnowprefetch osvw ibs skinit wdt tce topoext
                     perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
                     invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bml
                     avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
                     avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                     xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
                     avx512_bf16 clzero irperf xsaveerpr rdpru wbnoinvd amd_ppin arat npt lbrv
                     svm_lock nrrip_save tsc_scale vmcbl_clean flushbyasid decodeassist
                     pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                     umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                     avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
                     AMD-V
Virtualization:       AMD-V
L1d cache:            6 MiB (192 instances)
L1i cache:            6 MiB (192 instances)
L2 cache:             192 MiB (192 instances)
L3 cache:             2.3 GiB (24 instances)
NUMA node(s):          8

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

Platform Notes (Continued)

NUMA node0 CPU(s):	0-23,192-215
NUMA node1 CPU(s):	24-47,216-239
NUMA node2 CPU(s):	48-71,240-263
NUMA node3 CPU(s):	72-95,264-287
NUMA node4 CPU(s):	96-119,288-311
NUMA node5 CPU(s):	120-143,312-335
NUMA node6 CPU(s):	144-167,336-359
NUMA node7 CPU(s):	168-191,360-383
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	96M	2.3G	16	Unified	3	98304	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available:	8 nodes (0-7)
node 0 cpus:	0-23,192-215
node 0 size:	193212 MB
node 0 free:	191982 MB
node 1 cpus:	24-47,216-239
node 1 size:	193489 MB
node 1 free:	192875 MB
node 2 cpus:	48-71,240-263
node 2 size:	193523 MB
node 2 free:	193014 MB
node 3 cpus:	72-95,264-287
node 3 size:	193523 MB
node 3 free:	193036 MB
node 4 cpus:	96-119,288-311
node 4 size:	193523 MB
node 4 free:	192956 MB
node 5 cpus:	120-143,312-335
node 5 size:	193523 MB
node 5 free:	192903 MB
node 6 cpus:	144-167,336-359
node 6 size:	193523 MB
node 6 free:	192980 MB
node 7 cpus:	168-191,360-383
node 7 size:	193393 MB
node 7 free:	190803 MB
node distances:	
node 0 1 2 3 4 5 6 7	
0:	10 12 12 12 32 32 32 32
1:	12 10 12 12 32 32 32 32
2:	12 12 10 12 32 32 32 32
3:	12 12 12 10 32 32 32 32

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_int_base = 1870

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

Platform Notes (Continued)

```
4: 32 32 32 32 32 10 12 12 12  
5: 32 32 32 32 12 10 12 12  
6: 32 32 32 32 12 12 10 12  
7: 32 32 32 32 12 12 12 10
```

9. /proc/meminfo

```
MemTotal: 1584859836 kB
```

10. who -r

```
run-level 3 Aug 29 18:55
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status  
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES  
enabled getty@  
enabled-runtime systemd-remount-fs  
disabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd autofs autoyast-initscripts  
blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cron cups  
cups-browsed debug-shell display-manager ebttables exchange-bmc-os-info firewalld gpm  
grub2-once haveged-haveged-switch-root hwloc-dump-hwdata ipmi ipmievrd irqbalance  
issue-add-ssh-keys issue-generator kbdsettings kexec-load klog lunmask lvm2-monitor  
man-db-create multipathd nfs nfs-blkmap nsqd nvmefc-boot-connections nvmf-autoconnect  
postfix purge-kernels rdisc rollback rpcbind rpmconfigcheck rsyncd rsyslog serial-getty@  
smartd smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures  
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned  
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
generated jexec  
indirect wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=23fac4c3-67a0-43a3-b5eb-2787b6b441ca  
splash=silent  
resume=/dev/disk/by-uuid/5e1ca509-5afc-4c24-bca2-34d66622ea63  
mitigations=auto  
quiet  
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 0:  
    current policy: frequency should be within 1.50 GHz and 2.55 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
boost state support:  
    Supported: yes  
    Active: yes
```

15. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.
```

```
Preset profile: latency-performance
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_int_base = 1870

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

Platform Notes (Continued)

```
16. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space      0
    vm.compaction_proactiveness   20
    vm.dirty_background_bytes     0
    vm.dirty_background_ratio     10
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs    3000
    vm.dirty_ratio                 8
    vm.dirty_writeback_centisecs  500
    vm.dirtytime_expire_seconds   43200
    vm.extfrag_threshold          500
    vm.min_unmapped_ratio         1
    vm.nr_hugepages                0
    vm.nr_hugepages_mempolicy     0
    vm.nr_overcommit_hugepages    0
    vm.swappiness                  1
    vm.watermark_boost_factor    15000
    vm.watermark_scale_factor     10
    vm.zone_reclaim_mode          1
```

```
17. /sys/kernel/mm/transparent_hugepage
    defrag           [always] defer defer+madvise madvise never
    enabled          [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force
```

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                  1
    max_ptes_none          511
    max_ptes_shared        256
    max_ptes_swap          64
    pages_to_scan          4096
    scan_sleep_millisecs   10000
```

```
19. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP4
```

```
20. Disk information
    SPEC is set to: /home/CPU2017
    Filesystem  Type  Size  Used  Avail Use% Mounted on
    /dev/nvme0n1p3  xfs  381G  65G  316G  17% /home
```

```
21. /sys/devices/virtual/dmi/id
    Vendor:      KAYTUS
    Product:     KR2280-E2-A0-R0-00
    Product Family: Not specified
    Serial:      000000000
```

```
22. dmidecode
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
3x Hynix HMCG94MEBRA109N 64 GB 2 rank 4800
6x Samsung M329R8GA0BB0-CQKDG 64 GB 2 rank 4800
10x Samsung M329R8GA0BB0-CQKEG 64 GB 2 rank 4800
5x Samsung M329R8GA0BB0-CQKVG 64 GB 2 rank 4800
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 04.02.32
BIOS Date: 05/14/2024
```

Compiler Version Notes

```
=====
C | 502.gcc_r(peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

=====
C | 502.gcc_r(peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Compiler Version Notes (Continued)

C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.
KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_base = 1870
SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2024

Aug-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc
```

C++ benchmarks:

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-flang -lamdaloc
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Peak Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-flang -lamdalloc
```

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-V1.0.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_int_base = 1870

KR2280V2 (AMD EPYC 9684X)

SPECrate®2017_int_peak = 1950

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-08-29 18:57:20-0400.

Report generated on 2024-11-06 12:20:29 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-05.