



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

**SPECSpeed®2017\_int\_base = 18.9**

**SPECSpeed®2017\_int\_peak = 19.0**

CPU2017 License: 9017


Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

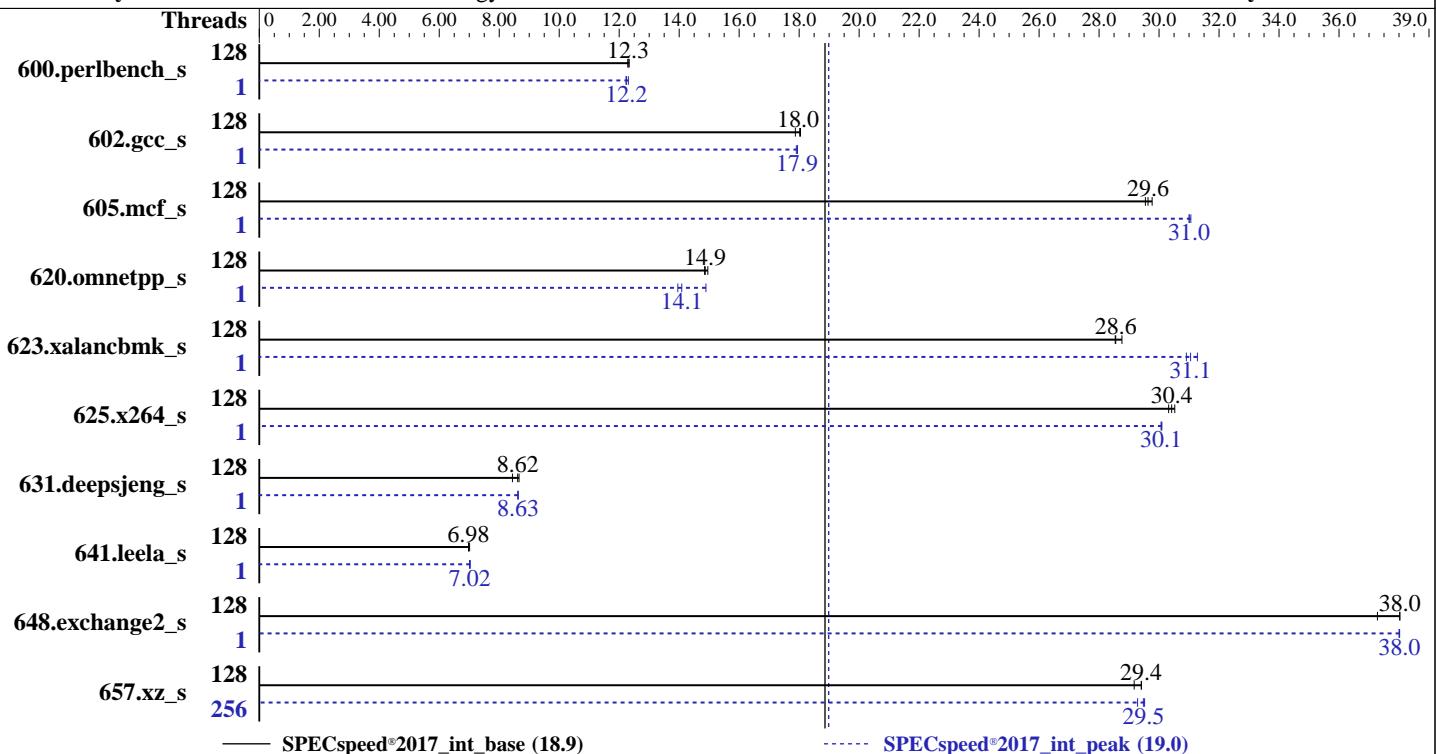

### Hardware

CPU Name: AMD EPYC 9555  
Max MHz: 4400  
Nominal: 3200  
Enabled: 128 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 256 MB I+D on chip per chip,  
32 MB shared / 8 cores  
Other: None  
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)  
Storage: 1 x 480 GB SATA SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
Compiler: Kernel 6.4.0-150600.21-default  
Parallel: C/C++/Fortran: Version 5.0.0 of AOCC  
Firmware: Yes  
File System: Lenovo BIOS Version KAE127C 5.10 released Sep-2024  
System State: btrfs  
Base Pointers: Run level 3 (multi-user)  
Peak Pointers: 64-bit  
Other: 64-bit  
Power Management: None  
BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	144	12.3	<b>144</b>	<b>12.3</b>	144	12.3	1	144	12.3	145	12.2	<b>145</b>	<b>12.2</b>		
602.gcc_s	128	221	18.0	223	17.9	<b>221</b>	<b>18.0</b>	1	222	17.9	<b>222</b>	<b>17.9</b>	222	17.9		
605.mcf_s	128	160	29.5	159	29.8	<b>159</b>	<b>29.6</b>	1	152	31.1	<b>152</b>	<b>31.0</b>	152	31.0		
620.omnetpp_s	128	<b>110</b>	<b>14.9</b>	110	14.8	109	15.0	1	110	14.9	<b>116</b>	<b>14.1</b>	117	14.0		
623.xalancbmk_s	128	<b>49.6</b>	<b>28.6</b>	49.7	28.5	49.3	28.8	1	<b>45.6</b>	<b>31.1</b>	45.3	31.3	<b>45.8</b>	30.9		
625.x264_s	128	57.8	30.5	58.2	30.3	<b>58.0</b>	<b>30.4</b>	1	58.7	30.1	<b>58.7</b>	<b>30.1</b>	58.6	30.1		
631.deepsjeng_s	128	<b>166</b>	<b>8.62</b>	170	8.44	165	8.66	1	<b>166</b>	<b>8.63</b>	166	8.63	166	8.62		
641.leela_s	128	243	7.01	245	6.98	<b>244</b>	<b>6.98</b>	1	243	7.01	243	7.03	<b>243</b>	<b>7.02</b>		
648.exchange2_s	128	78.9	37.3	<b>77.3</b>	<b>38.0</b>	77.3	38.0	1	77.4	38.0	77.3	38.0	<b>77.3</b>	<b>38.0</b>		
657.xz_s	128	210	29.4	<b>210</b>	<b>29.4</b>	212	29.2	256	209	29.5	<b>210</b>	<b>29.5</b>	211	29.3		
SPECspeed®2017_int_base = 18.9								SPECspeed®2017_int_peak = 19.0								

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

cpupower set to performance mode  
cpupower frequency-set -r -g performance  
To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-
    aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"
```

Environment variables set by runcpu during the 600.perlbench\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 602.gcc\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 648.exchange2\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-255"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes

### BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

NUMA nodes per socket set to NPS4

P-State set to Enabled

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Oct 24 18:47:21 2024
```

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
18:47:21 up 3 min, 1 user, load average: 0.23, 0.55, 0.29
USER   TTY   FROM           LOGIN@   IDLE   JCPU   PCPU WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 3093813
max locked memory        (kbytes, -l) 2097152
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

```
max memory size      (kbytes, -m) unlimited
open files           (-n) 1024
pipe size            (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority   (-r) 0
stack size            (kbytes, -s) unlimited
cpu time              (seconds, -t) unlimited
max user processes    (-u) 3093813
virtual memory        (kbytes, -v) unlimited
file locks             (-x) unlimited
```

---

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.058/templogs/preenv.intspeed.058.0.log --lognum 058.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
```

---

### 6. /proc/cpuinfo

```
model name      : AMD EPYC 9555 64-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 26
model          : 2
stepping        : 1
microcode       : 0xb002116
bugs            : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores      : 64
siblings        : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

---

### 7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255
Vendor ID:             AuthenticAMD
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9555 64-Core Processor
BIOS Model name:	AMD EPYC 9555 64-Core Processor
BIOS CPU family:	Unknown CPU @ 3.2GHz
CPU family:	107
Model:	26
Thread(s) per core:	2
Core(s) per socket:	64
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	100%
CPU max MHz:	3200.0000
CPU min MHz:	1500.0000
BogoMIPS:	6390.59
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperf_fmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnwprefetch osrw ibs skinfit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bml1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local user_shstk avx_vnni avx512_bf16 clzero iperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vmbi umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpocntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_ll1d debug_swap
Virtualization:	AMD-V
L1d cache:	6 MiB (128 instances)
L1i cache:	4 MiB (128 instances)
L2 cache:	128 MiB (128 instances)
L3 cache:	512 MiB (16 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-15,128-143
NUMA node1 CPU(s):	16-31,144-159
NUMA node2 CPU(s):	32-47,160-175
NUMA node3 CPU(s):	48-63,176-191
NUMA node4 CPU(s):	64-79,192-207
NUMA node5 CPU(s):	80-95,208-223
NUMA node6 CPU(s):	96-111,224-239
NUMA node7 CPU(s):	112-127,240-255
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

Vulnerability Spectre v2:

Mitigation: Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-15,128-143

node 0 size: 96337 MB

node 0 free: 95786 MB

node 1 cpus: 16-31,144-159

node 1 size: 96759 MB

node 1 free: 96126 MB

node 2 cpus: 32-47,160-175

node 2 size: 96759 MB

node 2 free: 96282 MB

node 3 cpus: 48-63,176-191

node 3 size: 96721 MB

node 3 free: 96104 MB

node 4 cpus: 64-79,192-207

node 4 size: 96759 MB

node 4 free: 96241 MB

node 5 cpus: 80-95,208-223

node 5 size: 96759 MB

node 5 free: 96243 MB

node 6 cpus: 96-111,224-239

node 6 size: 96759 MB

node 6 free: 96224 MB

node 7 cpus: 112-127,240-255

node 7 size: 96623 MB

node 7 free: 96014 MB

node distances:

node 0	1	2	3	4	5	6	7
0:	10	12	12	12	32	32	32
1:	12	10	12	12	32	32	32
2:	12	12	10	12	32	32	32
3:	12	12	12	10	32	32	32
4:	32	32	32	32	10	12	12
5:	32	32	32	32	12	10	12
6:	32	32	32	32	12	12	10
7:	32	32	32	32	12	12	10

-----  
9. /proc/meminfo

MemTotal: 792043176 kB

-----  
10. who -r

run-level 3 Oct 24 18:44

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator  
kdbsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd  
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievrd issue-add-ssh-keys  
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd  
serial-getty@ smartd\_generate\_opts snmpd snmptrapd systemd-boot-check-no-failures  
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync  
systemd-timesyncd  
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=c7bcdd76-5da5-4465-a15b-714d6d85ddbc  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 144:  
current policy: frequency should be within 1.50 GHz and 3.20 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 1

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

16. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hugepage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information  
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 btrfs 444G 266G 176G 61% /home

20. /sys/devices/virtual/dmi/id  
Vendor: Lenovo  
Product: ThinkSystem SR665 V3  
Product Family: ThinkSystem  
Serial: 1234567890

21. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
13x SK Hynix HMCG88AHBRA471N 32 GB 2 rank 6400, configured at 6000  
4x SK Hynix HMCG88AHBRA472N 32 GB 2 rank 6400, configured at 6000  
7x SK Hynix HMCG88AHBRA478N 32 GB 2 rank 6400, configured at 6000

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: KAE127C-5.10  
BIOS Date: 09/18/2024  
BIOS Revision: 5.10  
Firmware Revision: 53.9



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Compiler Version Notes

=====

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran | 648.exchange2\_s(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Base Portability Flags (Continued)

641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -fsto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdaloc -lflang
```

602.gcc\_s: Same as 600.perlbench\_s

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -fsto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

605.mcf\_s (continued):

```
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdaloc -lflang
```

625.x264\_s: Same as 600.perlbench\_s

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

620.omnetpp\_s: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdaloc-ext -lflang
```

623.xalancbmk\_s: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdaloc-ext -lflang
```

631.deepsjeng\_s: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

641.leela\_s: Same as 631.deepsjeng\_s

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.20 GHz, AMD EPYC 9555)

SPECspeed®2017\_int\_base = 18.9

SPECspeed®2017\_int\_peak = 19.0

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsrc-in-nested-loop -O3 -march=znver5 -fvecelib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -flang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.html>  
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.xml>  
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-24 06:47:21-0400.

Report generated on 2024-11-20 11:08:17 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-19.