# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11
(2.00 GHz, AMD EPYC 8224PN)

**SPECrate®2017_fp_base = 245**

**SPECrate®2017_fp_peak = 247**

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Nov-2024
**Hardware Availability:** Oct-2024
**Software Availability:** Sep-2024

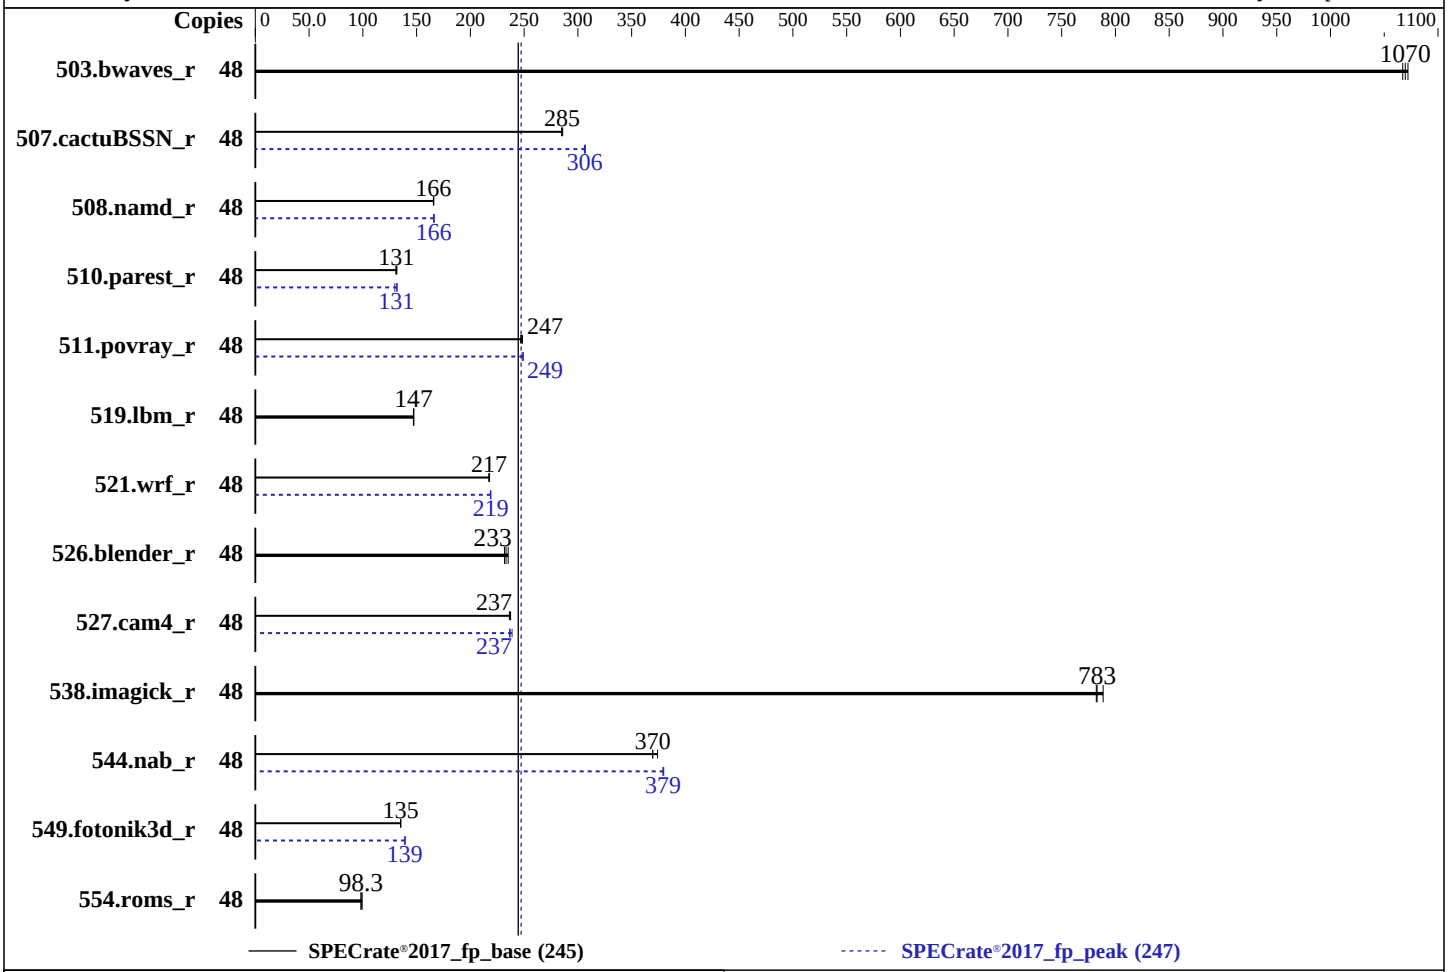


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 8224PN |
| Max MHz: | 3000 |
| Nominal: | 2000 |
| Enabled: | 24 cores, 1 chip, 2 threads/core |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 64 MB I+D on chip per chip, 16 MB shared / 6 cores |
| Other: | None |
| Memory: | 192 GB (6 x 32 GB 2Rx8 PC5-4800B-R) |
| Storage: | 1 x 480 GB SATA SSD |
| Other: | CPU Cooling: Air |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.21-default |
| Compiler: | C/C++/Fortran: Version 5.0.0 of AOCC |
| Parallel: | No |
| Firmware: | HPE BIOS Version v1.20 08/09/2024 released Aug-2024 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | None |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11
(2.00 GHz, AMD EPYC 8224PN)

SPECrate®2017_fp_base = 245

SPECrate®2017_fp_peak = 247

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Nov-2024
**Hardware Availability:** Oct-2024
**Software Availability:** Sep-2024

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 48 | 449 | 1070 | 451 | 1070 | **450** | **1070** | 48 | 449 | 1070 | 451 | 1070 | **450** | **1070** |
| 507.cactuBSSN_r | 48 | 213 | 285 | **213** | **285** | 213 | 286 | 48 | 199 | 306 | **198** | **306** | 198 | 307 |
| 508.namd_r | 48 | **275** | **166** | 275 | 166 | 275 | 166 | 48 | 275 | 166 | **275** | **166** | 274 | 166 |
| 510.parest_r | 48 | 954 | 132 | 961 | 131 | **957** | **131** | 48 | 952 | 132 | **955** | **131** | 968 | 130 |
| 511.povray_r | 48 | 451 | 248 | **453** | **247** | 454 | 247 | 48 | 450 | 249 | 452 | 248 | **450** | **249** |
| 519.lbm_r | 48 | **343** | **147** | 343 | 147 | 344 | 147 | 48 | **343** | **147** | 343 | 147 | 344 | 147 |
| 521.wrf_r | 48 | 494 | 218 | **495** | **217** | 495 | 217 | 48 | 491 | 219 | **491** | **219** | 492 | 219 |
| 526.blender_r | 48 | 315 | 232 | **313** | **233** | 311 | 235 | 48 | 315 | 232 | **313** | **233** | 311 | 235 |
| 527.cam4_r | 48 | **355** | **237** | 355 | 236 | 354 | 237 | 48 | 355 | 236 | 352 | 239 | **354** | **237** |
| 538.imagick_r | 48 | **152** | **783** | 151 | 789 | 153 | 782 | 48 | **152** | **783** | 151 | 789 | 153 | 782 |
| 544.nab_r | 48 | 219 | 370 | **219** | **370** | 216 | 374 | 48 | 213 | 379 | **213** | **379** | 213 | 380 |
| 549.fotonik3d_r | 48 | **1383** | **135** | 1382 | 135 | 1385 | 135 | 48 | **1344** | **139** | 1344 | 139 | 1345 | 139 |
| 554.roms_r | 48 | 768 | 99.4 | **776** | **98.3** | 776 | 98.3 | 48 | 768 | 99.4 | **776** | **98.3** | 776 | 98.3 |

**SPECrate®2017_fp_base = 245**

**SPECrate®2017_fp_peak = 247**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib:/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
 BIOS Configuration
 Workload Profile set to General Throughput Compute
 Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
 AMD Periodic Directory Rinse Tuning set to Cache-Bound
 Memory Patrol Scrubbing set to Disabled
 ACPI CST C2 Latency set to 18 microseconds
 Thermal Configuration set to Maximum Cooling
 The reference code/AGESA version used in this ROM is version Siena-PI 1.0.0

 Sysinfo program /home/CPU2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Mon Nov 18 03:58:11 2024

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
```

**(Continued on next page)**

## Platform Notes (Continued)

```
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   03:58:11 up 1 min,  3 users,  load average: 1.64, 0.98, 0.38
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 771620
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 771620
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=31
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 bash -c cd $SPEC/ && $SPEC/fprate.sh
 python3 ./run_fprate.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 8224PN 24-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 160
```

(Continued on next page)

## Platform Notes (Continued)

```
     stepping        : 2
     microcode       : 0xaa00215
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
     TLB size        : 3584 4K pages
     cpu cores       : 24
     siblings        : 48
     1 physical ids (chips)
     48 processors (hardware threads)
     physical id 0: core ids 0-5,8-13,16-21,24-29
     physical id 0: apicids 0-11,16-27,32-43,48-59
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               48
   On-line CPU(s) list:                  0-47
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       Advanced Micro Devices, Inc.
   Model name:                           AMD EPYC 8224PN 24-Core Processor
   BIOS Model name:                      AMD EPYC 8224PN 24-Core Processor                CPU @ 2.0GHz
   BIOS CPU family:                      107
   CPU family:                           25
   Model:                                160
   Thread(s) per core:                   2
   Core(s) per socket:                   24
   Socket(s):                            1
   Stepping:                             2
   BogoMIPS:                             3993.64
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                         extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                         sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                         cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                         osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                         perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                         ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                                         erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                         clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                         xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                         user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                                         amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                                         flushbyasid decodeassists pausefilter pfthreshold avic
                                         v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                                         ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                         avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                                         debug_swap
   Virtualization:                       AMD-V
   L1d cache:                            768 KiB (24 instances)
   L1i cache:                            768 KiB (24 instances)
   L2 cache:                             24 MiB (24 instances)
   L3 cache:                             64 MiB (4 instances)
   NUMA node(s):                         1
```

(Continued on next page)

## Platform Notes (Continued)

```
  NUMA node0 CPU(s):                   0-47
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Mitigation; Safe RET
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                       always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K     768K    8 Data            1    64        1             64
     L1i       32K     768K    8 Instruction     1    64        1             64
     L2         1M      24M    8 Unified         2  2048        1             64
     L3        16M      64M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 1 nodes (0)
  node 0 cpus: 0-47
  node 0 size: 192930 MB
  node 0 free: 191936 MB
  node distances:
  node   0
    0:  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       197560404 kB

------------------------------------------------------------
10. who -r
  run-level 3 Nov 18 03:57

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
                  purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
                  wickedd-dhcp6 wickedd-nanny
  enabled-runtime systemd-remount-fs
  disabled        blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                  grub2-once haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck
                  serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator
                  systemd-sysext systemd-time-wait-sync systemd-timesyncd
  indirect        systemd-userdbd wickedd
```

**(Continued on next page)**

## Platform Notes (Continued)

```
------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=45afd261-73b0-43a7-a23e-94db089f1753
  splash=silent
  resume=/dev/disk/by-uuid/d6c60601-2238-4347-950d-7321063e97c9
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 7:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               0
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
```

(Continued on next page)

## Platform Notes (Continued)

```
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/CPU2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda3      xfs   476G  104G  373G  22% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL145 Gen11
    Product Family: ProLiant
    Serial:         DL145GEN11

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    6x Hynix HMCG88MEBRA115N 32 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      1.20
   BIOS Date:         08/09/2024
   BIOS Revision:     1.20
   Firmware Revision: 1.62
```

## Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

**(Continued on next page)**

## Base Optimization Flags (Continued)

C++ benchmarks (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Benchmarks using both C and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

## Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

**(Continued on next page)**

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

C++ benchmarks:

508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast

**(Continued on next page)**

## Peak Optimization Flags (Continued)

510.parest_r (continued):
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

**(Continued on next page)**

## Peak Optimization Flags (Continued)

511.povray_r: `-m64 -std=c++14`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-x86-use-vzeroupper=false`
`-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5`
`-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7`
`-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000`
`-fremap-arrays -mllvm -reduce-array-computations=3 -zopt`
`-mllvm -unroll-threshold=100`
`-mllvm -loop-unswitch-threshold=200000 -lamdlibm`
`-lamdalloc -ldl`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5`
`-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7`
`-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining`
`-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt`
`-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000`
`-faggressive-loop-transform -fvector-transform -fscalar-transform`
`-Mrecursive -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc`
`-ldl -lflang`

## Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

**(Continued on next page)**

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc500-flags.html`
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Siena-rev1.0.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc500-flags.xml`
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Siena-rev1.0.xml`


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.



Tested with SPEC CPU®2017 v1.1.9 on 2024-11-17 17:28:11-0500.
Report generated on 2024-12-18 18:24:13 by CPU2017 PS formatter v6716.
Originally published on 2024-12-17.