# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.
## KR1280V3 (Intel Xeon 6740E)

**SPECrate®2017_fp_base = 938**

**SPECrate®2017_fp_peak = 954**

**CPU2017 License:** 3358
**Test Sponsor:** Kaytus Systems Pte. Ltd.
**Tested by:** Kaytus Systems Pte. Ltd.

**Test Date:** Nov-2024
**Hardware Availability:** Oct-2024
**Software Availability:** Jun-2024

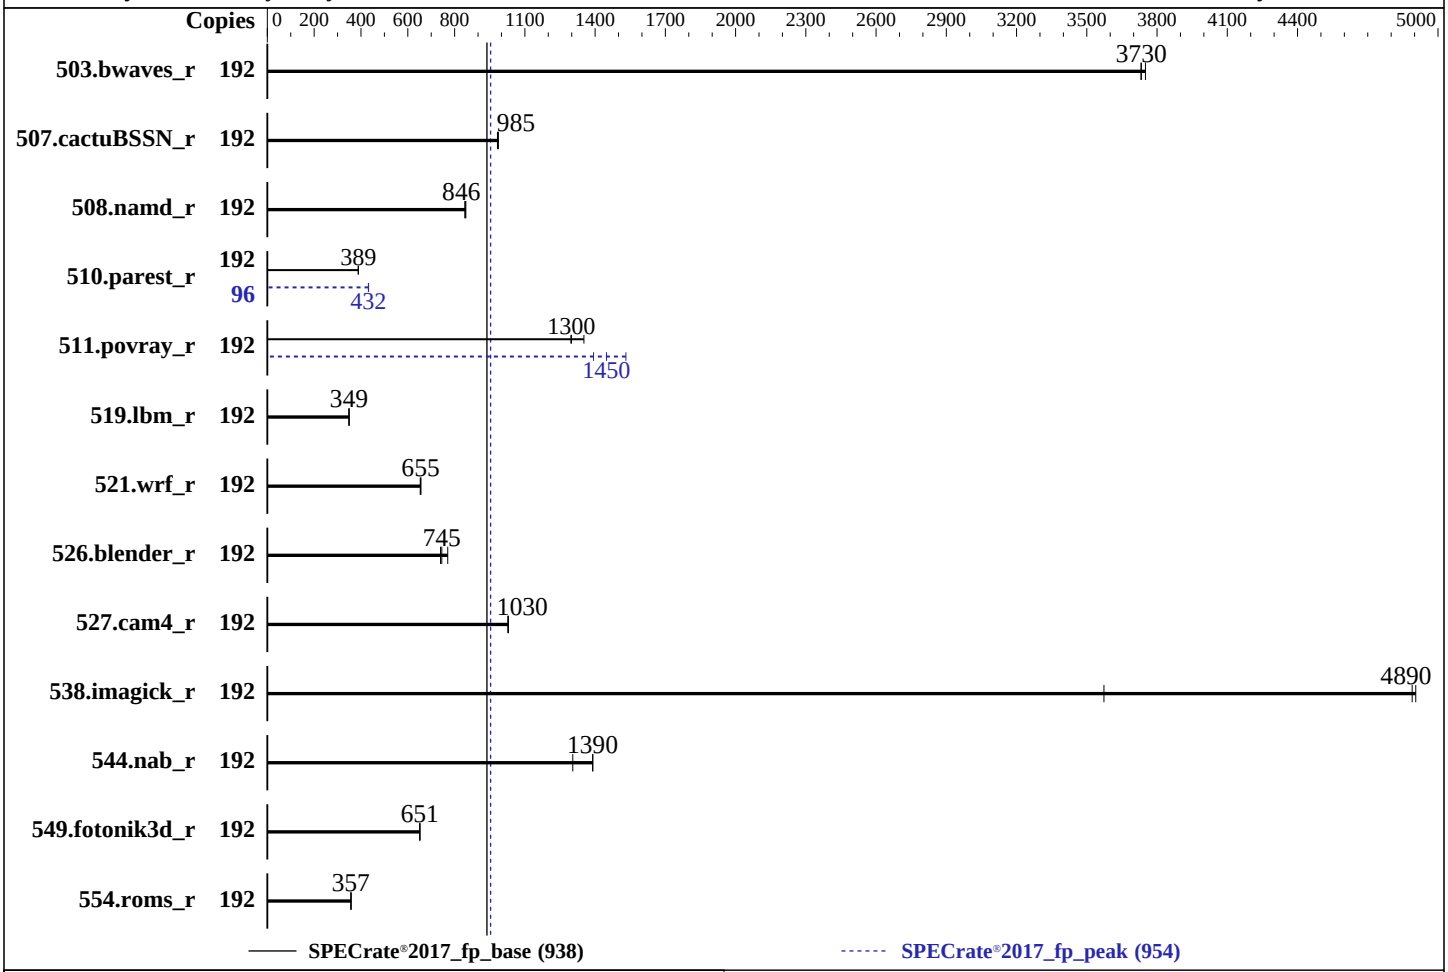


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon 6740E |
| Max MHz: | 3200 |
| Nominal: | 2400 |
| Enabled: | 192 cores, 2 chips |
| Orderable: | 1,2 chips |
| Cache L1: | 64 KB I + 32 KB D on chip per core |
| L2: | 4 MB I+D on chip per core |
| L3: | 96 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R) |
| Storage: | 1 x 960 GB NVME SSD |
| Other: | CPU Cooling: Air |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP6<br>6.4.0-150600.21-default |
| Compiler: | C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;<br>Fortran: Version 2024.1 of Intel Fortran Compiler for Linux; |
| Parallel: | No |
| Firmware: | Version 00.17.03 released Sep-2024 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.
## KR1280V3 (Intel Xeon 6740E)

SPECrate®2017_fp_base = 938

SPECrate®2017_fp_peak = 954

**CPU2017 License:** 3358
**Test Sponsor:** Kaytus Systems Pte. Ltd.
**Tested by:** Kaytus Systems Pte. Ltd.

**Test Date:** Nov-2024
**Hardware Availability:** Oct-2024
**Software Availability:** Jun-2024

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 192 | 516 | 3730 | 513 | 3750 | **516** | **3730** | 192 | 516 | 3730 | 513 | 3750 | **516** | **3730** |
| 507.cactuBSSN_r | 192 | **247** | **985** | 246 | 987 | 247 | 983 | 192 | **247** | **985** | 246 | 987 | 247 | 983 |
| 508.namd_r | 192 | 215 | 848 | **216** | **846** | 216 | 844 | 192 | 215 | 848 | **216** | **846** | 216 | 844 |
| 510.parest_r | 192 | 1293 | 388 | 1290 | 389 | **1292** | **389** | 96 | 581 | 432 | **581** | **432** | 582 | 432 |
| 511.povray_r | 192 | 346 | 1300 | **345** | **1300** | 332 | 1350 | 192 | 293 | 1530 | **309** | **1450** | 322 | 1390 |
| 519.lbm_r | 192 | 580 | 349 | 579 | 349 | **580** | **349** | 192 | 580 | 349 | 579 | 349 | **580** | **349** |
| 521.wrf_r | 192 | **656** | **655** | 659 | 653 | 656 | 656 | 192 | **656** | **655** | 659 | 653 | 656 | 656 |
| 526.blender_r | 192 | 395 | 740 | **392** | **745** | 379 | 771 | 192 | 395 | 740 | **392** | **745** | 379 | 771 |
| 527.cam4_r | 192 | 327 | 1030 | 326 | 1030 | **327** | **1030** | 192 | 327 | 1030 | 326 | 1030 | **327** | **1030** |
| 538.imagick_r | 192 | **97.7** | **4890** | 97.4 | 4910 | 134 | 3570 | 192 | **97.7** | **4890** | 97.4 | 4910 | 134 | 3570 |
| 544.nab_r | 192 | 232 | 1390 | 248 | 1300 | **233** | **1390** | 192 | 232 | 1390 | 248 | 1300 | **233** | **1390** |
| 549.fotonik3d_r | 192 | **1149** | **651** | 1149 | 651 | 1148 | 652 | 192 | **1149** | **651** | 1149 | 651 | 1148 | 652 |
| 554.roms_r | 192 | 853 | 358 | 855 | 357 | **854** | **357** | 192 | 853 | 358 | 855 | 357 | **854** | **357** |

**SPECrate®2017_fp_base = 938**

**SPECrate®2017_fp_peak = 954**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

**(Continued on next page)**

## General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Nov 13 02:15:06 2024

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   02:15:06 up  5:21,  1 user,  load average: 116.24, 172.67, 183.71
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
```

(Continued on next page)

## Platform Notes (Continued)

```
  root     tty1     -                20:55    5:19m  1.60s  0.03s sh
  reportable-ic2024.1-lin-sierraforest-rate-20240308.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4124634
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4124634
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 sh reportable-ic2024.1-lin-sierraforest-rate-20240308.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
   ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=96 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all
   fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
   ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=96 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
   --output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6740E
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 175
    stepping        : 3
    microcode       : 0x3000190
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 96
    siblings        : 96
    2 physical ids (chips)
    192 processors (hardware threads)
    physical id 0: core ids 0-95
    physical id 1: core ids 0-95
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
    32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
    4,186,188,190
    physical id 1: apicids
    512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
    64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
    6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668
    ,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 48 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               192
  On-line CPU(s) list:                  0-191
  Vendor ID:                            GenuineIntel
  BIOS Vendor ID:                       Intel(R) Corporation
  Model name:                           Intel(R) Xeon(R) 6740E
  BIOS Model name:                      Intel(R) Xeon(R) 6740E  CPU @ 2.4GHz
  BIOS CPU family:                      179
  CPU family:                           6
  Model:                                175
  Thread(s) per core:                   1
  Core(s) per socket:                   96
  Socket(s):                            2
  Stepping:                             3
  Frequency boost:                      enabled
  CPU(s) scaling MHz:                   34%
  CPU max MHz:                          2401.0000
  CPU min MHz:                          800.0000
  BogoMIPS:                             4800.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                                        xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                                        cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                        ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
                                        cqm rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt
                                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                        cqm_mbm_local split_lock_detect user_shstk avx_vnni lam wbnoinvd
                                        dtherm ida arat pln pts umip pku ospke waitpkg gfni vaes vpclmulqdq
                                        tme rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                                        md_clear serialize pconfig arch_lbr ibt flush_l1d arch_capabilities
  L1d cache:                            6 MiB (192 instances)
  L1i cache:                            12 MiB (192 instances)
  L2 cache:                             192 MiB (48 instances)
  L3 cache:                             192 MiB (2 instances)
  NUMA node(s):                         2
  NUMA node0 CPU(s):                    0-95
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  NUMA node1 CPU(s):                   96-191
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                       PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       6M    8 Data            1     64        1             64
     L1i       64K      12M    8 Instruction     1    128        1             64
     L2         4M     192M   16 Unified         2   4096        1             64
     L3        96M     192M   12 Unified         3 131072        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-95
  node 0 size: 515526 MB
  node 0 free: 475387 MB
  node 1 cpus: 96-191
  node 1 size: 515658 MB
  node 1 free: 477967 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055933316 kB

------------------------------------------------------------
10. who -r
  run-level 3 Nov 12 20:54

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
                   irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor
                   nscd nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback rsyslog
                   smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
```

(Continued on next page)

## Platform Notes (Continued)

```
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info fsidd
                   gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load
                   lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                   serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd udisks2 vncserver@
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=18377317-737e-4218-af3f-1dfefc7f1bec
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=371M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 27:
    current policy: frequency should be within 800 MHz and 2.40 GHz.
                    The governor "ondemand" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
```

(Continued on next page)

## Platform Notes (Continued)

```
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs   60000
   defrag                      1
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan            4096
   scan_sleep_millisecs    10000

 ------------------------------------------------------------
 18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP6

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /home/CPU2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p2 xfs   892G  218G  675G  25% /

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:         KAYTUS
     Product:        KR1280-X3-A0-R0-00
     Product Family: Not specified
     Serial:         000000000

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      00.17.03
    BIOS Date:         09/27/2024
```

## Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

## Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

# Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `basepeak = yes`

Benchmarks using both Fortran and C:

521.wrf_r: `basepeak = yes`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2 -flto -Ofast -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-intel-V1.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-intel-V1.0.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.9 on 2024-11-13 02:15:05-0500.
Report generated on 2025-01-15 12:36:55 by CPU2017 PS formatter v6716.
Originally published on 2025-01-14.