



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6960P)

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

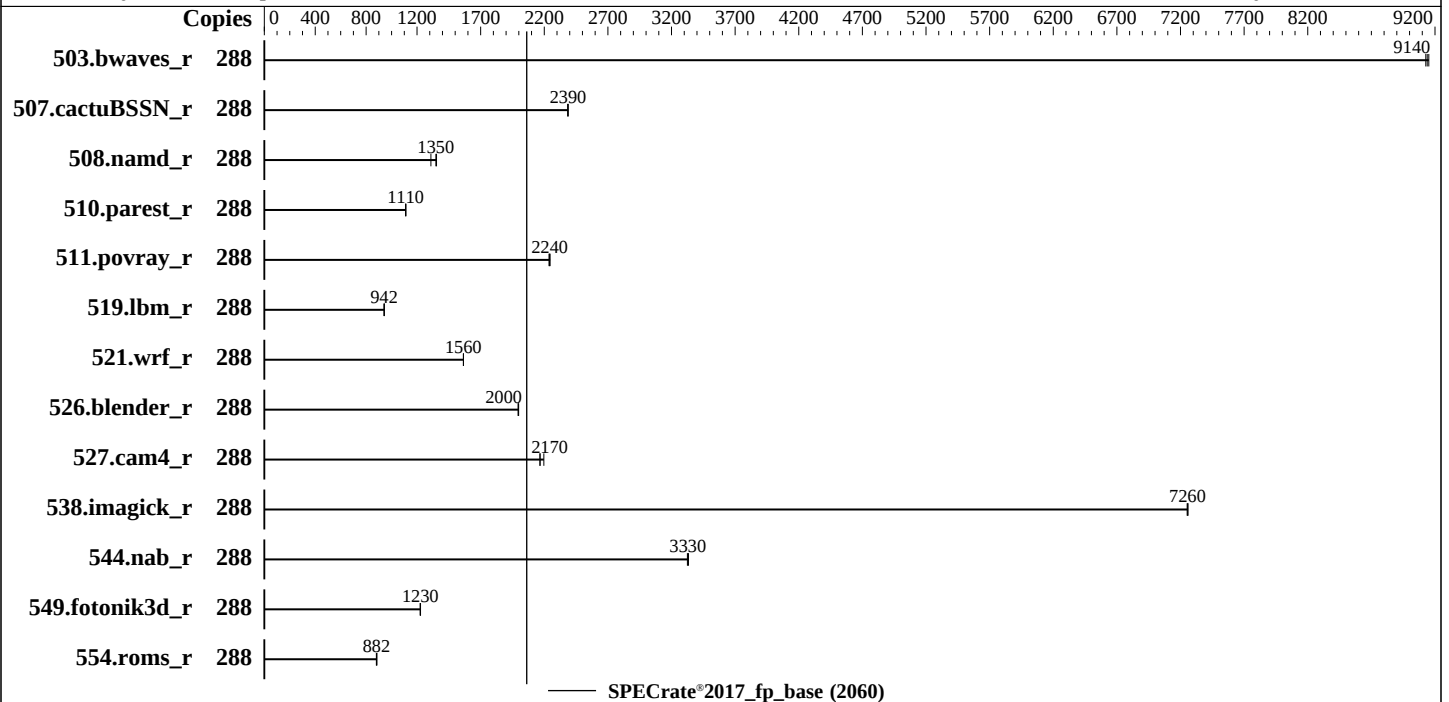

Hardware

CPU Name: Intel Xeon 6960P
Max MHz: 3900
Nominal: 2700
Enabled: 144 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 432 MB I+D on chip per chip
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-88/56B-M)
Storage: 1 x 1.6TB NVMe SSD
Other: CPU Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler
for Linux;
Parallel: No
Firmware: Version 1.2 released Jan-2025
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of
additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL, Intel Xeon 6960P)

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	288	316	9140	316	9150	316	9130							
507.cactuBSSN_r	288	153	2390	153	2390	153	2380							
508.namd_r	288	202	1350	203	1350	209	1310							
510.parest_r	288	678	1110	678	1110	678	1110							
511.povray_r	288	301	2240	299	2250	300	2240							
519.lbm_r	288	322	942	322	942	322	942							
521.wrf_r	288	412	1560	412	1560	412	1570							
526.blender_r	288	219	2000	220	2000	220	2000							
527.cam4_r	288	233	2170	232	2170	229	2200							
538.imagick_r	288	98.7	7260	98.8	7250	98.7	7260							
544.nab_r	288	146	3330	145	3330	146	3320							
549.fotonik3d_r	288	914	1230	915	1230	917	1220							
554.roms_r	288	519	882	517	885	520	880							

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6960P)

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Performance Tuning = BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode = Extreme Performance

KTI Prefetch = Enable

DCU Streamer Prefetcher = Disable

LLC Dead Line Alloc = Disable

Stale AtoS = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on 181-170 Mon Mar 10 11:24:33 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-
1. uname -a
Linux 181-170 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86_64
x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6960P)

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
-----
2. w
   11:24:33 up 1 min,  1 user,  load average: 6.82, 3.15, 1.17
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty2      -             11:24    9.00s  0.91s  0.02s -bash
```

```
-----
3. Username
   From environment variable $USER:  root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6188528
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6188528
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 -c
ic2024.1-lin-core-avx512-rate-20240308.cfg --define smt-on --define cores=144 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 --configfile
ic2024.1-lin-core-avx512-rate-20240308.cfg --define smt-on --define cores=144 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.012/templots/preenv.fprate.012.0.log --lognum 012.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6960P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 72
siblings       : 144
2 physical ids (chips)
288 processors (hardware threads)
physical id 0: core ids 0-23,64-87,128-151
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL, Intel Xeon 6960P)

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

physical id 1: core ids 0-23,64-87,128-151

physical id 0: apicids 0-47,128-175,256-303

physical id 1: apicids 512-559,640-687,768-815

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      288
On-line CPU(s) list:         0-287
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6960P
BIOS Model name:             Intel(R) Xeon(R) 6960P   CPU @ 2.7GHz
BIOS CPU family:             179
CPU family:                  6
Model:                       173
Thread(s) per core:         2
Core(s) per socket:         72
Socket(s):                   2
Stepping:                    1
BogoMIPS:                    5400.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                             rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                             clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                             gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                             la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                             md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                             amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:              VT-x
L1d cache:                   6.8 MiB (144 instances)
L1i cache:                   9 MiB (144 instances)
L2 cache:                    288 MiB (144 instances)
L3 cache:                    864 MiB (2 instances)
NUMA node(s):                6
NUMA node0 CPU(s):           0-23,144-167
NUMA node1 CPU(s):           24-47,168-191
NUMA node2 CPU(s):           48-71,192-215
NUMA node3 CPU(s):           72-95,216-239
NUMA node4 CPU(s):           96-119,240-263
NUMA node5 CPU(s):           120-143,264-287
Vulnerability Gather data sampling: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6960P)

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6.8M	12	Data	1	64	1	64
L1i	64K	9M	16	Instruction	1	64	1	64
L2	2M	288M	16	Unified	2	2048	1	64
L3	432M	864M	16	Unified	3	442368	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 6 nodes (0-5)
node 0 cpus: 0-23,144-167
node 0 size: 257469 MB
node 0 free: 256624 MB
node 1 cpus: 24-47,168-191
node 1 size: 258035 MB
node 1 free: 257402 MB
node 2 cpus: 48-71,192-215
node 2 size: 258035 MB
node 2 free: 257123 MB
node 3 cpus: 72-95,216-239
node 3 size: 258035 MB
node 3 free: 256788 MB
node 4 cpus: 96-119,240-263
node 4 size: 258035 MB
node 4 free: 257325 MB
node 5 cpus: 120-143,264-287
node 5 size: 257550 MB
node 5 free: 256884 MB
node distances:
node 0 1 2 3 4 5
0: 10 12 12 21 21 21
1: 12 10 12 21 21 21
2: 12 12 10 21 21 21
3: 21 21 21 10 12 12
4: 21 21 21 12 10 12
5: 21 21 21 12 12 10

9. /proc/meminfo

MemTotal: 1584293084 kB

10. who -r

run-level 3 Mar 10 11:24 last=5

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6960P)

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
graphical	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* udisks2.service	loaded	failed	failed	Disk Manager

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nscd nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd gpm grub2-once haveged ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd-generate-opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
indirect	systemd-userdbd wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=d1a687ce-0a78-499c-9181-4e82ae083016
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=365M,high
crashkernel=72M,low
```

15. cpupower frequency-info

```
analyzing CPU 115:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6960P)

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2025
Hardware Availability: Feb-2025
Software Availability: Jun-2024

Platform Notes (Continued)

```
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3 btrfs 1.5T 138G 1.4T 10% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      Supermicro
Product:     Super Server
Product Family: Family
Serial:      0123456789
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
24x Micron Technology MTC40F2046S1HC88XD1 WCCCC 64 GB 2 rank 8800
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6960P)

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2025
Hardware Availability: Feb-2025
Software Availability: Jun-2024

Platform Notes (Continued)

BIOS Version: 1.2
BIOS Date: 01/24/2025
BIOS Revision: 5.35

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6960P)

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2025
Hardware Availability: Feb-2025
Software Availability: Jun-2024

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL, Intel Xeon 6960P)

SPECrate®2017_fp_base = 2060

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revG.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revG.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-10 14:24:32-0400.

Report generated on 2025-04-29 18:09:28 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-25.