SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 1288H V7 (Intel Xeon Gold 6430)

SPECrate®2017_int_base = 264

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2025
Hardware Availability: Dec-2023
Software Availability: Apr-2024

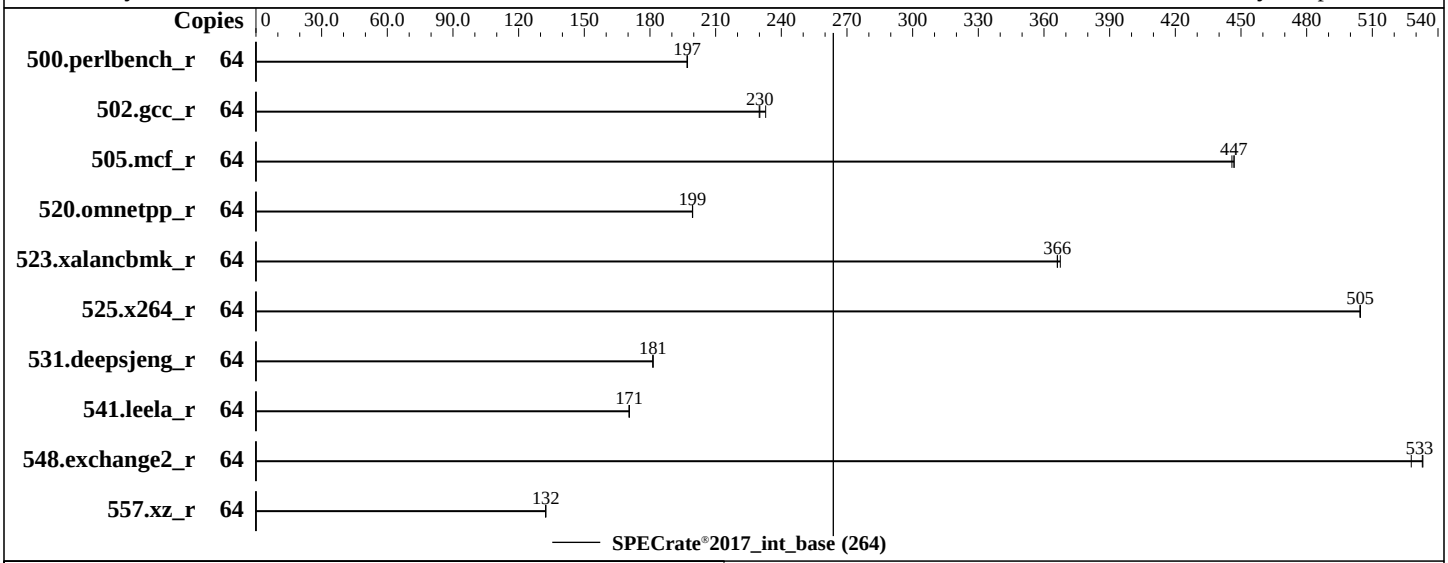

Hardware

CPU Name:	Intel Xeon Gold 6430
Max MHz:	3400
Nominal:	2100
Enabled:	32 cores, 1 chip, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	60 MB I+D on chip per chip
Other:	None
Memory:	256 GB (8 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)
Storage:	1 x 960 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	Red Hat Enterprise Linux 9.4 (Plow) 5.14.0-427.13.1.el9_4.x86_64
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 01.01.06.08 Released Jan-2025
File System:	xfs
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 1288H V7 (Intel Xeon Gold 6430)

SPECrate®2017_int_base = 264

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2025
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	517	197	517	197	**517**	**197**							
502.gcc_r	64	394	230	389	233	**394**	**230**							
505.mcf_r	64	**231**	**447**	231	447	232	446							
520.omnetpp_r	64	**421**	**199**	421	199	421	200							
523.xalancbmk_r	64	**185**	**366**	185	366	184	367							
525.x264_r	64	**222**	**505**	222	505	222	504							
531.deepsjeng_r	64	**404**	**181**	404	181	404	181							
541.leela_r	64	622	171	621	171	**622**	**171**							
548.exchange2_r	64	315	533	**315**	**533**	318	528							
557.xz_r	64	523	132	522	132	**522**	**132**							

SPECrate®2017_int_base = 264

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC4 (4-clusters)

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Mon Mar  3 07:55:28 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-32.el9_4)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
   2024 x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    07:55:28 up  3:20,  3 users,  load average: 44.30, 59.11, 61.94
   USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
   root     seat0     04:35    0.00s  0.00s  0.00s /usr/libexec/gdm-x-session --register-session --run-script
   gnome-session
   root     :1        04:35   ?xdm?   1:22   0.00s /usr/libexec/gdm-x-session --register-session --run-script
   gnome-session
   root     pts/1     04:36    3:17m  0.01s  0.01s -bash

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   real-time non-blocking time  (microseconds, -R) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   core file size              (blocks, -c) 0
   data seg size               (kbytes, -d) unlimited
   scheduling priority                 (-e) 0
   file size                   (blocks, -f) unlimited
   pending signals                     (-i) 1027915
   max locked memory           (kbytes, -l) 8192
   max memory size             (kbytes, -m) unlimited
   open files                          (-n) 1024
   pipe size                (512 bytes, -p) 8
   POSIX message queues         (bytes, -q) 819200
   real-time priority                  (-r) 0
   stack size                  (kbytes, -s) unlimited
   cpu time                   (seconds, -t) unlimited
   max user processes                  (-u) 1027915
   virtual memory              (kbytes, -v) unlimited
   file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 31
 /usr/lib/systemd/systemd --user
 /usr/libexec/gnome-terminal-server
 bash
 bash
 runcpu --define default-platform-flags --copies 64 -c ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define
   smt-on --define cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches
   --tune base -o all intrate
 runcpu --define default-platform-flags --copies 64 --configfile
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
   rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.028/templogs/preenv.intrate.028.0.log --lognum 028.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Gold 6430
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b000603
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 32
    siblings        : 64
    1 physical ids (chips)
    64 processors (hardware threads)
    physical id 0: core ids 0-31
    physical id 0: apicids 0-63
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                       x86_64
  CPU op-mode(s):                     32-bit, 64-bit
  Address sizes:                      46 bits physical, 57 bits virtual
```

(Continued on next page)

Platform Notes (Continued)

```
   Byte Order:                      Little Endian
   CPU(s):                          64
   On-line CPU(s) list:             0-63
   Vendor ID:                       GenuineIntel
   BIOS Vendor ID:                  Intel(R) Corporation
   Model name:                      Intel(R) Xeon(R) Gold 6430
   BIOS Model name:                 Intel(R) Xeon(R) Gold 6430
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              2
   Core(s) per socket:              32
   Socket(s):                       1
   Stepping:                        8
   BogoMIPS:                        4200.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                                    rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                                    xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                                    dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                                    sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                                    rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                    intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                    flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                                    erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                    clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
                                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                    split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                    vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                    vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                    bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                    serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                    amx_int8 flush_l1d arch_capabilities
   Virtualization:                  VT-x
   L1d cache:                       1.5 MiB (32 instances)
   L1i cache:                       1 MiB (32 instances)
   L2 cache:                        64 MiB (32 instances)
   L3 cache:                        60 MiB (1 instance)
   NUMA node(s):                    4
   NUMA node0 CPU(s):               0-7,32-39
   NUMA node1 CPU(s):               8-15,40-47
   NUMA node2 CPU(s):               16-23,48-55
   NUMA node3 CPU(s):               24-31,56-63
   Vulnerability Gather data sampling: Not affected
   Vulnerability Itlb multihit:     Not affected
   Vulnerability L1tf:              Not affected
   Vulnerability Mds:               Not affected
   Vulnerability Meltdown:          Not affected
   Vulnerability Mmio stale data:   Not affected
   Vulnerability Retbleed:          Not affected
   Vulnerability Spec rstack overflow: Not affected
   Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:        Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                                    PBRSB-eIBRS SW sequence
   Vulnerability Srbds:             Not affected
   Vulnerability Tsx async abort:   Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     1.5M   12 Data            1    64        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
     L1i       32K       1M    8 Instruction     1    64        1             64
     L2         2M      64M   16 Unified         2  2048        1             64
     L3        60M      60M   15 Unified         3 65536        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-7,32-39
  node 0 size: 63524 MB
  node 0 free: 62099 MB
  node 1 cpus: 8-15,40-47
  node 1 size: 64507 MB
  node 1 free: 63465 MB
  node 2 cpus: 16-23,48-55
  node 2 size: 64507 MB
  node 2 free: 63368 MB
  node 3 cpus: 24-31,56-63
  node 3 size: 64502 MB
  node 3 free: 63508 MB
  node distances:
  node   0   1   2   3
    0:  10  12  12  12
    1:  12  10  12  12
    2:  12  12  10  12
    3:  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       263211768 kB

------------------------------------------------------------
10. who -r
  run-level 5 Mar 3 04:35

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-32.el9_4)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                  accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
                  gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt
                  low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                  nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
                  rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
                  systemd-boot-update systemd-network-generator tuned udisks2 upower vgauthd vmtoolsd
  enabled-runtime systemd-remount-fs
  disabled        arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                  canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty
                  cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq iprdump iprinit
                  iprupdate iscsi-init iscsid iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update
                  netavark-dhcp-proxy netavark-firewalld-reload nftables numad nvmf-autoconnect
                  ostree-readonly-sysroot-migration ostree-state-overlay@ pesign podman podman-auto-update
                  podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd
                  rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@
                  speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures systemd-pstore
```

(Continued on next page)

Platform Notes (Continued)

```
                  systemd-sysext wpa_supplicant
  indirect        iscsi spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                  systemd-sysupdate systemd-sysupdate-reboot

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
  root=/dev/mapper/rhel-root
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  nohz_full=1-63

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 52:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
```

(Continued on next page)

Platform Notes (Continued)

```
   defrag                      1
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan            4096
   scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.4 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
  system-release Red Hat Enterprise Linux release 9.4 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   791G   15G  777G   2% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         XFUSION
    Product:        1288H V7
    Product Family: Eagle Stream

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    8x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800, configured at 4400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       XFUSION
   BIOS Version:      01.01.06.08
   BIOS Date:         01/03/2025
   BIOS Revision:     6.8
```

Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================================================
Fortran | 548.exchange2_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-03 07:55:27-0500.
Report generated on 2025-03-26 10:37:17 by CPU2017 PS formatter v6716.
Originally published on 2025-03-25.