SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1
(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = 1690

CPU2017 License: 9082
Test Sponsor: Giga Computing Technology Co., Ltd.
Tested by: Giga Computing Technology Co., Ltd.

Test Date: May-2025
Hardware Availability: Feb-2025
Software Availability: Jun-2024

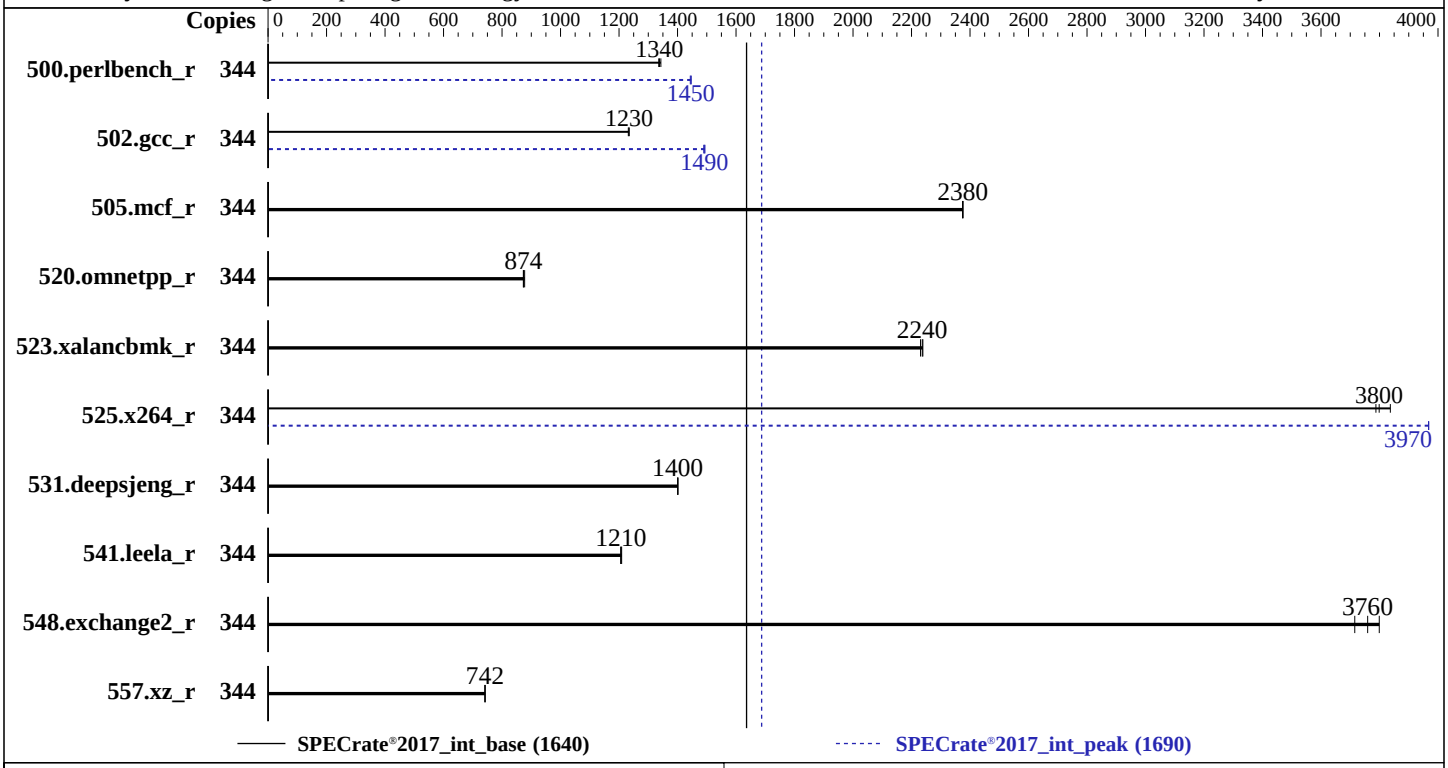

Hardware

CPU Name:	Intel Xeon 6787P
Max MHz:	3800
Nominal:	2000
Enabled:	172 cores, 2 chips, 2 threads/core
Orderable:	1,2 chip(s)
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-88/56B-M, running at 8000)
Storage:	1 x 3.84TB SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version F25 released May-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to perfer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
(Test Sponsor: Giga Computing Technology Co., Ltd.)
R284-S90-AAJ1
(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = 1690

CPU2017 License: 9082
Test Sponsor: Giga Computing Technology Co., Ltd.
Tested by: Giga Computing Technology Co., Ltd.

Test Date: May-2025
Hardware Availability: Feb-2025
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	344	408	1340	410	1340	**409**	**1340**	344	**379**	**1450**	379	1440	379	1450
502.gcc_r	344	395	1230	**395**	**1230**	395	1230	344	**327**	**1490**	326	1490	327	1490
505.mcf_r	344	234	2370	234	2380	**234**	**2380**	344	234	2370	234	2380	**234**	**2380**
520.omnetpp_r	344	517	873	**517**	**874**	514	877	344	517	873	**517**	**874**	514	877
523.xalancbmk_r	344	163	2230	**162**	**2240**	162	2240	344	163	2230	**162**	**2240**	162	2240
525.x264_r	344	157	3840	159	3790	**159**	**3800**	344	152	3970	152	3970	**152**	**3970**
531.deepsjeng_r	344	281	1400	**281**	**1400**	281	1400	344	281	1400	**281**	**1400**	281	1400
541.leela_r	344	**472**	**1210**	471	1210	473	1210	344	**472**	**1210**	471	1210	473	1210
548.exchange2_r	344	243	3720	237	3800	**240**	**3760**	344	243	3720	237	3800	**240**	**3760**
557.xz_r	344	501	742	501	741	**501**	**742**	344	501	742	501	741	**501**	**742**

SPECrate®2017_int_base = **1640**

SPECrate®2017_int_peak = **1690**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu May 22 11:44:19 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   11:44:19 up 11 min,  1 user,  load average: 0.05, 0.87, 1.18
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                11:40    6.00s  1.23s  0.02s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4125853
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
```

(Continued on next page)

Platform Notes (Continued)

```
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 4125853
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 -c
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=172 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 --configfile
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=172 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.085/templogs/preenv.intrate.085.0.log --lognum 085.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6787P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003a3
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 86
    siblings        : 172
    2 physical ids (chips)
    344 processors (hardware threads)
    physical id 0: core ids 0-42,64-106
    physical id 1: core ids 0-42,64-106
    physical id 0: apicids 0-85,128-213
    physical id 1: apicids 256-341,384-469
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               344
  On-line CPU(s) list:                  0-343
  Vendor ID:                            GenuineIntel
  BIOS Vendor ID:                       Intel(R) Corporation
  Model name:                           Intel(R) Xeon(R) 6787P
  BIOS Model name:                      Intel(R) Xeon(R) 6787P  CPU @ 2.0GHz
  BIOS CPU family:                      179
```

(Continued on next page)

Platform Notes (Continued)

```
   CPU family:                           6
   Model:                                173
   Thread(s) per core:                   2
   Core(s) per socket:                   86
   Socket(s):                            2
   Stepping:                             1
   CPU(s) scaling MHz:                   23%
   CPU max MHz:                          3800.0000
   CPU min MHz:                          800.0000
   BogoMIPS:                             4000.00
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                         nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                         pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                         xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                         tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                         3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                         ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                         vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                                         rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                         clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                         xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                         split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                         arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
                                         umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                                         avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                         cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                                         pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                         arch_capabilities
   Virtualization:                       VT-x
   L1d cache:                            8.1 MiB (172 instances)
   L1i cache:                            10.8 MiB (172 instances)
   L2 cache:                             344 MiB (172 instances)
   L3 cache:                             672 MiB (2 instances)
   NUMA node(s):                         4
   NUMA node0 CPU(s):                    0-42,172-214
   NUMA node1 CPU(s):                    43-85,215-257
   NUMA node2 CPU(s):                    86-128,258-300
   NUMA node3 CPU(s):                    129-171,301-343
   Vulnerability Gather data sampling:   Not affected
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
   Vulnerability Mmio stale data:        Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:               Not affected
   Vulnerability Spec rstack overflow:   Not affected
   Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                         PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                  Not affected
   Vulnerability Tsx async abort:        Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     8.1M   12 Data            1     64        1             64
      L1i       64K    10.8M   16 Instruction     1     64        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
     L2          2M     344M   16 Unified         2   2048        1             64
     L3        336M     672M   16 Unified         3 344064        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-42,172-214
  node 0 size: 257500 MB
  node 0 free: 255634 MB
  node 1 cpus: 43-85,215-257
  node 1 size: 258025 MB
  node 1 free: 256757 MB
  node 2 cpus: 86-128,258-300
  node 2 size: 258025 MB
  node 2 free: 257084 MB
  node 3 cpus: 129-171,301-343
  node 3 size: 257943 MB
  node 3 free: 256994 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056250764 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 22 11:33

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                   bluetooth cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings
                   klog lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels
                   rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
                   wickedd-dhcp6 wickedd-nanny wpa_supplicant
  enabled-runtime  systemd-remount-fs
  disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                   autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                   chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq
                   ebtables exchange-bmc-os-info fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys
                   kexec-load ksm kvm_stat lunmask man-db-create multipathd munge nfs nfs-blkmap nmb ntp-wait
                   ntpd openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon salt-minion
                   serial-getty@ slurmd smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd svnserve
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
                   wpa_supplicant@ ypbind
  indirect         pcscd saned@ systemd-userdbd wickedd
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=205c50d5-8622-4656-b281-2c13270d7dbe
  splash=silent
  resume=/dev/disk/by-uuid/66e6d88c-6f5e-41e0-a414-a0794a222fa2
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 230:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               0
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP6

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p3 xfs   2.5T  715G  1.8T  29% /home

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:          Giga Computing
     Product:         R284-S90-AAJ1-000
     Product Family: Server
     Serial:          0123456789012345678 9AB

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M327R8GA0EB0-CLVXB 64 GB 2 rank 11200, configured at 8000


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       GIGABYTE
    BIOS Version:      F25
    BIOS Date:         05/08/2025
    BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:
```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Peak Compiler Invocation

C benchmarks:
```
icx
```

C++ benchmarks:
```
icpx
```

Fortran benchmarks:
```
ifx
```

Peak Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-w -std=c11 -m64 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1) `-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fno-strict-overflow -L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc`

502.gcc_r: `-m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1) `-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib -ljemalloc`

505.mcf_r: `basepeak = yes`

525.x264_r: `-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fno-alias -L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc`

557.xz_r: `basepeak = yes`

C++ benchmarks:

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-GNR-rev1.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-GNR-rev1.0.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-21 23:44:19-0400.
Report generated on 2025-06-18 10:24:11 by CPU2017 PS formatter v6716.
Originally published on 2025-06-18.