



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

SPECrate®2017\_fp\_peak = 2180

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

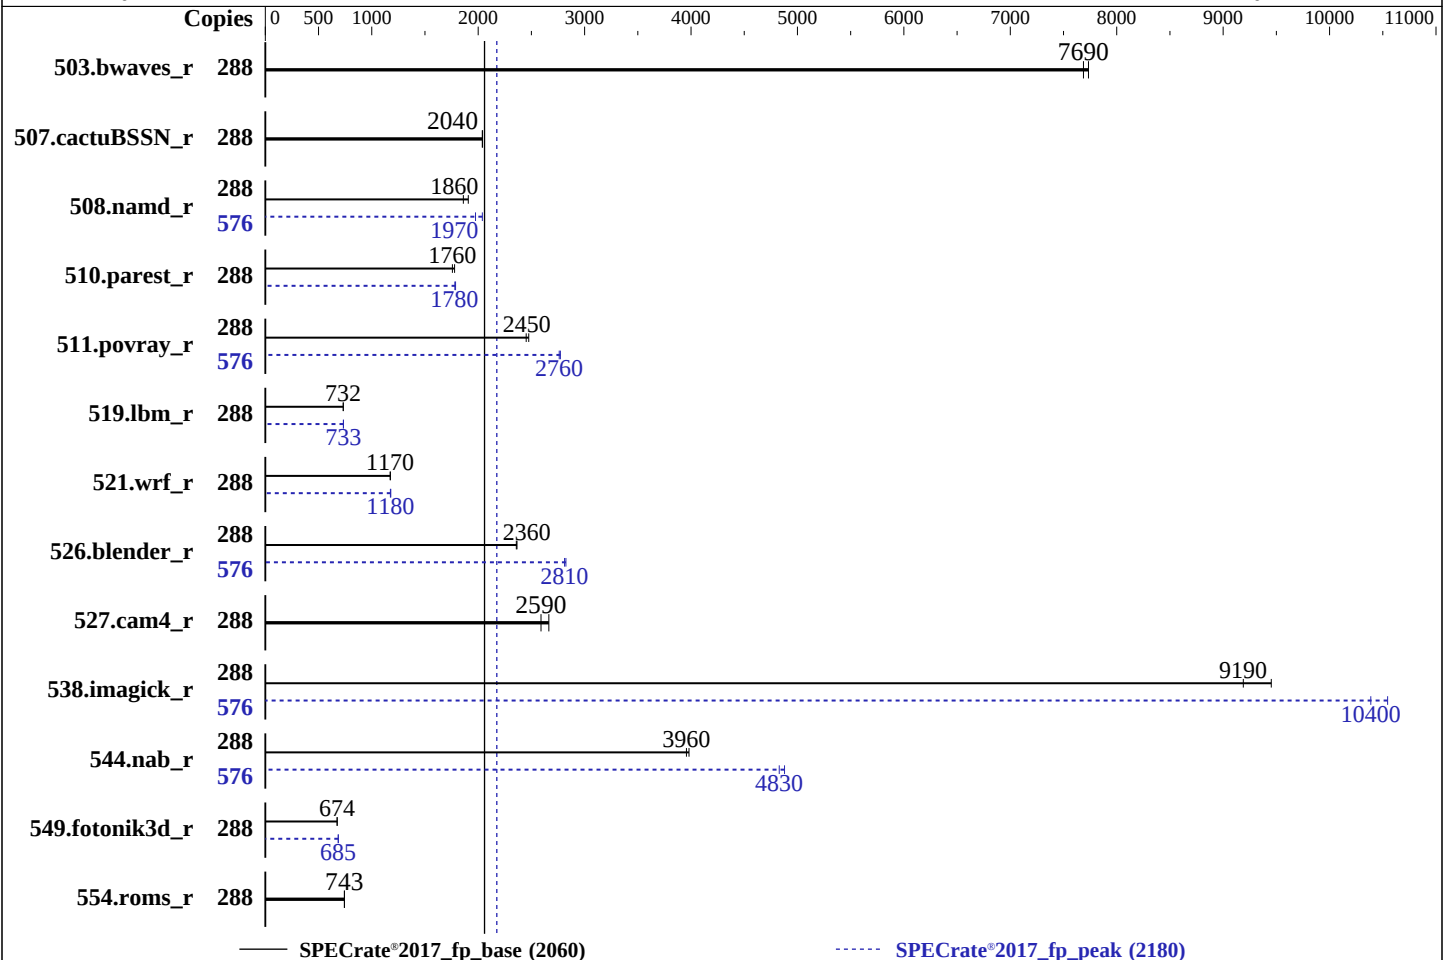

## Hardware

CPU Name: AMD EPYC 9825  
Max MHz: 3700  
Nominal: 2200  
Enabled: 288 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 384 MB I+D on chip per chip, 32 MB shared / 12 cores  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)  
Storage: 260 GB on tmpfs  
Other: CPU Cooling: Air

## Software

OS: Ubuntu 24.04.1 LTS  
6.8.0-51-generic  
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
Parallel: No  
Firmware: Version 1.2.1 released May-2025  
File System: tmpfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECrate®2017\_fp\_peak = 2180

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Results Table

| Benchmark       | Base   |             |             |             |             |         |       | Peak   |             |              |            |             |         |       |
|-----------------|--------|-------------|-------------|-------------|-------------|---------|-------|--------|-------------|--------------|------------|-------------|---------|-------|
|                 | Copies | Seconds     | Ratio       | Seconds     | Ratio       | Seconds | Ratio | Copies | Seconds     | Ratio        | Seconds    | Ratio       | Seconds | Ratio |
| 503.bwaves_r    | 288    | <b>376</b>  | <b>7690</b> | 373         | 7730        |         |       | 288    | <b>376</b>  | <b>7690</b>  | 373        | 7730        |         |       |
| 507.cactuBSSN_r | 288    | 179         | 2040        | <b>179</b>  | <b>2040</b> |         |       | 288    | 179         | 2040         | <b>179</b> | <b>2040</b> |         |       |
| 508.namd_r      | 288    | <b>147</b>  | <b>1860</b> | 143         | 1910        |         |       | 576    | <b>277</b>  | <b>1970</b>  | 268        | 2040        |         |       |
| 510.parest_r    | 288    | 424         | 1780        | <b>429</b>  | <b>1760</b> |         |       | 288    | 421         | 1790         | <b>423</b> | <b>1780</b> |         |       |
| 511.povray_r    | 288    | 272         | 2480        | <b>274</b>  | <b>2450</b> |         |       | 576    | <b>487</b>  | <b>2760</b>  | 485        | 2770        |         |       |
| 519.lbm_r       | 288    | 414         | 733         | <b>415</b>  | <b>732</b>  |         |       | 288    | 413         | 735          | <b>414</b> | <b>733</b>  |         |       |
| 521.wrf_r       | 288    | <b>550</b>  | <b>1170</b> | 549         | 1180        |         |       | 288    | <b>549</b>  | <b>1180</b>  | 547        | 1180        |         |       |
| 526.blender_r   | 288    | 185         | 2360        | <b>186</b>  | <b>2360</b> |         |       | 576    | 311         | 2820         | <b>312</b> | <b>2810</b> |         |       |
| 527.cam4_r      | 288    | 189         | 2660        | <b>194</b>  | <b>2590</b> |         |       | 288    | 189         | 2660         | <b>194</b> | <b>2590</b> |         |       |
| 538.imagick_r   | 288    | 75.8        | 9450        | <b>77.9</b> | <b>9190</b> |         |       | 576    | <b>138</b>  | <b>10400</b> | 136        | 10500       |         |       |
| 544.nab_r       | 288    | 122         | 3980        | <b>122</b>  | <b>3960</b> |         |       | 576    | <b>201</b>  | <b>4830</b>  | 199        | 4880        |         |       |
| 549.fotonik3d_r | 288    | <b>1665</b> | <b>674</b>  | 1662        | 675         |         |       | 288    | <b>1638</b> | <b>685</b>   | 1637       | 685         |         |       |
| 554.roms_r      | 288    | <b>616</b>  | <b>743</b>  | 616         | 743         |         |       | 288    | <b>616</b>  | <b>743</b>   | 616        | 743         |         |       |

SPECrate®2017\_fp\_base = 2060

SPECrate®2017\_fp\_peak = 2180

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

SPECrate®2017\_fp\_peak = 2180

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5\_A1.3/amd\_rate\_aocc500\_znver5\_A\_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5\_A1.3/amd\_rate\_aocc500\_znver5\_A\_lib/lib32:"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

Benchmark run from a 260 GB ramdisk created with the cmd: "mount -t tmpfs -o size=260G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

Virtualization Technology : Disabled

NUMA Nodes Per Socket : 4

System Profile : Custom

C-States : Disabled

Memory Patrol Scrub : Disabled

PCI ASPM L1 Link Power Management : Disabled

Periodic Directory Rinse Tuning : Blended

Determinism Control : Manual

Determinism Slider : Power Determinism

Optimizer Mode : Enabled

Adaptive Allocation : Enabled

Dram Refresh Delay : Performance

DIMM Self Healing -

on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5\_A1.3/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on SLR7734-R7725 Sat Jun 14 09:13:22 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

SPECrate®2017\_fp\_peak = 2180

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Platform Notes (Continued)

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a  
Linux SLR7734-R7725 6.8.0-51-generic #52-Ubuntu SMP PREEMPT\_DYNAMIC Thu Dec 5 13:09:44 UTC 2024 x86\_64  
x86\_64 x86\_64 GNU/Linux

2. w  
09:13:22 up 4:29, 1 user, load average: 269.99, 490.47, 537.63  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 04:47 4:24m 1.97s 0.75s /bin/bash ./amd\_rate\_aocc500\_znver5\_A1.sh

3. Username  
From environment variable \$USER: root

4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 6187765  
nofiles 1024  
vmemory(kbytes) unlimited  
locks unlimited  
rtprio 0

5. sysinfo process ancestry  
/sbin/init  
/bin/login -p --  
-bash  
/bin/bash /home/DellFiles/bin/DELL\_rate.sh  
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate  
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate  
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-VERS=6.2 --output\_format html,pdf,txt  
python3 ./run\_amd\_rate\_aocc500\_znver5\_A1.py  
/bin/bash ./amd\_rate\_aocc500\_znver5\_A1.sh  
runcpu --config amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 2 --define  
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-VERS=6.2 --output\_format html,pdf,txt fprate  
runcpu --configfile amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 2 --define  
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-VERS=6.2 --output\_format html,pdf,txt --nopower

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

SPECrate®2017\_fp\_peak = 2180

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Platform Notes (Continued)

```
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templots/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9825 144-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101047
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 144
siblings       : 288
2 physical ids (chips)
576 processors (hardware threads)
physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 1: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 0: apicids
0-23,32-55,64-87,96-119,128-151,160-183,192-215,224-247,256-279,288-311,320-343,352-375
physical id 1: apicids
512-535,544-567,576-599,608-631,640-663,672-695,704-727,736-759,768-791,800-823,832-855,864-887
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

### 7. lscpu

From lscpu from util-linux 2.39.3:

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Architecture:        | x86_64                                                                                                                                                                                                                                                                                                                                                                                                                               |
| CPU op-mode(s):      | 32-bit, 64-bit                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Address sizes:       | 52 bits physical, 57 bits virtual                                                                                                                                                                                                                                                                                                                                                                                                    |
| Byte Order:          | Little Endian                                                                                                                                                                                                                                                                                                                                                                                                                        |
| CPU(s):              | 576                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| On-line CPU(s) list: | 0-575                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Vendor ID:           | AuthenticAMD                                                                                                                                                                                                                                                                                                                                                                                                                         |
| BIOS Vendor ID:      | AMD                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Model name:          | AMD EPYC 9825 144-Core Processor                                                                                                                                                                                                                                                                                                                                                                                                     |
| BIOS Model name:     | AMD EPYC 9825 144-Core Processor                                                                                                                                                                                                                                                                                                                                                                                                     |
| BIOS CPU family:     | 107                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| CPU family:          | 26                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Model:               | 17                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Thread(s) per core:  | 2                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Core(s) per socket:  | 144                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Socket(s):           | 2                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Stepping:            | 0                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Frequency boost:     | enabled                                                                                                                                                                                                                                                                                                                                                                                                                              |
| CPU(s) scaling MHz:  | 59%                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| CPU max MHz:         | 3714.6479                                                                                                                                                                                                                                                                                                                                                                                                                            |
| CPU min MHz:         | 1500.0000                                                                                                                                                                                                                                                                                                                                                                                                                            |
| BogoMIPS:            | 4394.14                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Flags:               | fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat<br>pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb<br>rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid<br>extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid<br>sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm<br>cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch |

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECrate®2017\_fp\_peak = 2180

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Platform Notes (Continued)

osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext  
perfctr\_llc mwaitx cpb cat\_l3 cdp\_l3 hw\_pstate ssbd mba perfmon\_v2  
ibrs ibpb stibp ibrs\_enhanced vmmcall fsgsbase tsc\_adjust bmi1 avx2  
smep bmi2 invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap  
avx512ifma clflushopt clwb avx512cd sha\_ni avx512bw avx512vl xsaveopt  
xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total  
cqm\_mbm\_local user\_shstk avx\_vnni avx512\_bf16 clzero irperf  
xsaveerptr rdpru wbnoinvd amd\_ppin cppc arat npt lbrv svm\_lock  
nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter  
pfthreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl vnmi  
avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect  
movdiri movdir64b overflow\_recov succor smca avx512\_vp2intersect  
flush\_l1d debug\_swap

L1d cache: 13.5 MiB (288 instances)  
L1i cache: 9 MiB (288 instances)  
L2 cache: 288 MiB (288 instances)  
L3 cache: 768 MiB (24 instances)

NUMA node(s): 24  
NUMA node0 CPU(s): 0-11, 288-299  
NUMA node1 CPU(s): 12-23, 300-311  
NUMA node2 CPU(s): 24-35, 312-323  
NUMA node3 CPU(s): 36-47, 324-335  
NUMA node4 CPU(s): 48-59, 336-347  
NUMA node5 CPU(s): 60-71, 348-359  
NUMA node6 CPU(s): 72-83, 360-371  
NUMA node7 CPU(s): 84-95, 372-383  
NUMA node8 CPU(s): 96-107, 384-395  
NUMA node9 CPU(s): 108-119, 396-407  
NUMA node10 CPU(s): 120-131, 408-419  
NUMA node11 CPU(s): 132-143, 420-431  
NUMA node12 CPU(s): 144-155, 432-443  
NUMA node13 CPU(s): 156-167, 444-455  
NUMA node14 CPU(s): 168-179, 456-467  
NUMA node15 CPU(s): 180-191, 468-479  
NUMA node16 CPU(s): 192-203, 480-491  
NUMA node17 CPU(s): 204-215, 492-503  
NUMA node18 CPU(s): 216-227, 504-515  
NUMA node19 CPU(s): 228-239, 516-527  
NUMA node20 CPU(s): 240-251, 528-539  
NUMA node21 CPU(s): 252-263, 540-551  
NUMA node22 CPU(s): 264-275, 552-563  
NUMA node23 CPU(s): 276-287, 564-575

Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP  
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECrate®2017\_fp\_peak = 2180

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Platform Notes (Continued)

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 13.5M    | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 9M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 288M     | 16   | Unified     | 2     | 1024  | 1        | 64             |
| L3   | 32M      | 768M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 24 nodes (0-23)
node 0 cpus: 0-11,288-299
node 0 size: 63594 MB
node 0 free: 57343 MB
node 1 cpus: 12-23,300-311
node 1 size: 64503 MB
node 1 free: 62862 MB
node 2 cpus: 24-35,312-323
node 2 size: 64497 MB
node 2 free: 62809 MB
node 3 cpus: 36-47,324-335
node 3 size: 64503 MB
node 3 free: 60369 MB
node 4 cpus: 48-59,336-347
node 4 size: 64503 MB
node 4 free: 62824 MB
node 5 cpus: 60-71,348-359
node 5 size: 64497 MB
node 5 free: 62723 MB
node 6 cpus: 72-83,360-371
node 6 size: 64503 MB
node 6 free: 62822 MB
node 7 cpus: 84-95,372-383
node 7 size: 64503 MB
node 7 free: 62842 MB
node 8 cpus: 96-107,384-395
node 8 size: 64497 MB
node 8 free: 62750 MB
node 9 cpus: 108-119,396-407
node 9 size: 64503 MB
node 9 free: 62804 MB
node 10 cpus: 120-131,408-419
node 10 size: 64503 MB
node 10 free: 62786 MB
node 11 cpus: 132-143,420-431
node 11 size: 64481 MB
node 11 free: 62886 MB
node 12 cpus: 144-155,432-443
node 12 size: 64503 MB
node 12 free: 62832 MB
node 13 cpus: 156-167,444-455
node 13 size: 64503 MB
node 13 free: 62797 MB
node 14 cpus: 168-179,456-467
node 14 size: 64497 MB
node 14 free: 62786 MB
node 15 cpus: 180-191,468-479
node 15 size: 64503 MB
node 15 free: 62748 MB
node 16 cpus: 192-203,480-491
node 16 size: 64460 MB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECrate®2017\_fp\_peak = 2180

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Platform Notes (Continued)

node 16 free: 62771 MB  
node 17 cpus: 204-215,492-503  
node 17 size: 64497 MB  
node 17 free: 62817 MB  
node 18 cpus: 216-227,504-515  
node 18 size: 64503 MB  
node 18 free: 62833 MB  
node 19 cpus: 228-239,516-527  
node 19 size: 64503 MB  
node 19 free: 62787 MB  
node 20 cpus: 240-251,528-539  
node 20 size: 64497 MB  
node 20 free: 62811 MB  
node 21 cpus: 252-263,540-551  
node 21 size: 64503 MB  
node 21 free: 62820 MB  
node 22 cpus: 264-275,552-563  
node 22 size: 64503 MB  
node 22 free: 62767 MB  
node 23 cpus: 276-287,564-575  
node 23 size: 64442 MB  
node 23 free: 62744 MB  
node distances:

| node | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 |
|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0:   | 10 | 11 | 11 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 1:   | 11 | 10 | 11 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 2:   | 11 | 11 | 10 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 3:   | 12 | 12 | 12 | 10 | 11 | 11 | 12 | 12 | 12 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 4:   | 12 | 12 | 12 | 11 | 10 | 11 | 12 | 12 | 12 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 5:   | 12 | 12 | 12 | 11 | 11 | 10 | 12 | 12 | 12 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 6:   | 12 | 12 | 12 | 12 | 12 | 12 | 10 | 11 | 11 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 7:   | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 10 | 11 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 8:   | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 11 | 10 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 9:   | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 10 | 11 | 11 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 10:  | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 10 | 11 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 11:  | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 11 | 10 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 12:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 10 | 11 | 11 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| 13:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 11 | 10 | 11 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| 14:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 11 | 11 | 10 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| 15:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 10 | 11 | 11 | 12 | 12 | 12 | 12 | 12 | 12 |
| 16:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 11 | 10 | 11 | 12 | 12 | 12 | 12 | 12 | 12 |
| 17:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 11 | 11 | 10 | 12 | 12 | 12 | 12 | 12 | 12 |
| 18:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 10 | 11 | 11 | 12 | 12 | 12 |
| 19:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 10 | 11 | 12 | 12 | 12 |
| 20:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 11 | 10 | 12 | 12 | 12 |
| 21:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 10 | 11 | 11 | 11 |
| 22:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 10 | 11 | 11 |
| 23:  | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 11 | 10 | 10 |

9. /proc/meminfo  
MemTotal: 1584147040 kB

10. who -r  
run-level 3 Jun 14 04:44

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)  
Default Target Status

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECrate®2017\_fp\_peak = 2180

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Platform Notes (Continued)

multi-user      running

### 12. Services, from systemctl list-unit-files

| STATE           | UNIT FILES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled         | ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online<br>accounts-daemon anacron apparmor apport avahi-daemon blk-availability bluetooth<br>cloud-config cloud-final cloud-init cloud-init-local console-setup cron cups cups-browsed<br>dmesg e2scrub_reap finalrd getty@ gnome-remote-desktop gpu-manager grub-common<br>grub-initrd-fallback kerneloops keyboard-setup lm-sensors lvm2-monitor multipathd<br>networkd-dispatcher networking nvme-fc-boot-connections nvme-fc-autoconnect open-iscsi<br>open-vm-tools openvpn pollinate power-profiles-daemon rsyslog secureboot-db setvtrgb snapd<br>ssl-cert sssd switcheroo-control sysstat systemd-networkd systemd-oomd systemd-pstore<br>systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2<br>ufw vgauth wpa_supplicant |
| enabled-runtime | netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| disabled        | brltty console-getty debug-shell fio ifupdown-wait-online iscsid nftables openvpn-client@<br>openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd ssh<br>systemd-boot-check-no-failures systemd-confext systemd-network-generator<br>systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code<br>systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy<br>systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex<br>systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@<br>wpa_supplicant@                                                                                                                                                                                                           |
| generated       | speech-dispatcher                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| indirect        | saned@ spice-vdagentd sssd-autofs sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo<br>systemd-sysupdate systemd-sysupdate-reboot uuid                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| masked          | alsa-utils cryptdisks cryptdisks-early hwclock multipath-tools-boot saned screen-cleanup<br>sudo systemd-networkd-wait-online x11-common                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

### 13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.8.0-51-generic  
root=UUID=8458ae54-58cc-4621-9289-b1d743fde503  
ro

### 14. cpupower frequency-info

analyzing CPU 522:  
current policy: frequency should be within 1.50 GHz and 2.20 GHz.  
The governor "performance" may decide which speed to use  
within this range.

boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 2200MHz

### 15. tuned-adm active

Current active profile: throughput-performance

### 16. sysctl

|                             |    |
|-----------------------------|----|
| kernel.numa_balancing       | 1  |
| kernel.randomize_va_space   | 0  |
| vm.compaction_proactiveness | 20 |
| vm.dirty_background_bytes   | 0  |
| vm.dirty_background_ratio   | 10 |

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

SPECrate®2017\_fp\_peak = 2180

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Platform Notes (Continued)

```
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS
```

```
-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 260G 3.3G 257G 2% /mnt/ramdisk
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R7725
Product Family: PowerEdge
Serial: SLR7734
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
```

```
Memory:
23x 80AD000080AD HMC94AHBRA277N 64 GB 2 rank 6400
1x 80AD000080AD HMC94AHBRA480N 64 GB 2 rank 6400
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECrate®2017\_fp\_peak = 2180

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Platform Notes (Continued)

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 1.2.1  
BIOS Date: 05/01/2025  
BIOS Revision: 1.2

## Compiler Version Notes

=====

|   |  |                       |                           |                       |
|---|--|-----------------------|---------------------------|-----------------------|
| C |  | 519.lbm_r(base, peak) | 538.imagick_r(base, peak) | 544.nab_r(base, peak) |
|---|--|-----------------------|---------------------------|-----------------------|

-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

=====

|     |  |                        |                          |
|-----|--|------------------------|--------------------------|
| C++ |  | 508.namd_r(base, peak) | 510.parest_r(base, peak) |
|-----|--|------------------------|--------------------------|

-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

=====

|        |  |                          |                           |
|--------|--|--------------------------|---------------------------|
| C++, C |  | 511.povray_r(base, peak) | 526.blender_r(base, peak) |
|--------|--|--------------------------|---------------------------|

-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

=====

|                 |  |                             |
|-----------------|--|-----------------------------|
| C++, C, Fortran |  | 507.cactuBSSN_r(base, peak) |
|-----------------|--|-----------------------------|

-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECrate®2017\_fp\_peak = 2180

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Compiler Version Notes (Continued)

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

SPECrate®2017\_fp\_peak = 2180

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Base Portability Flags (Continued)

510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang -ldl

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

SPECrate®2017\_fp\_peak = 2180

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECrate®2017\_fp\_peak = 2180

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECrate®2017\_fp\_peak = 2180

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Peak Optimization Flags (Continued)

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick\_r: Same as 519.lbm\_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

SPECrate®2017\_fp\_peak = 2180

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Peak Optimization Flags (Continued)

549.fotonik3d\_r (continued):

-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-ldl -lflang

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm  
-lamdalloc -ldl

526.blender\_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 2060

SPECrate®2017\_fp\_peak = 2180

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-14 05:13:21-0400.

Report generated on 2025-07-01 19:11:10 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-01.