



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V4  
(2.50 GHz, Intel Xeon 6761P)

SPECspeed®2017\_fp\_base = 349

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Date: Jun-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

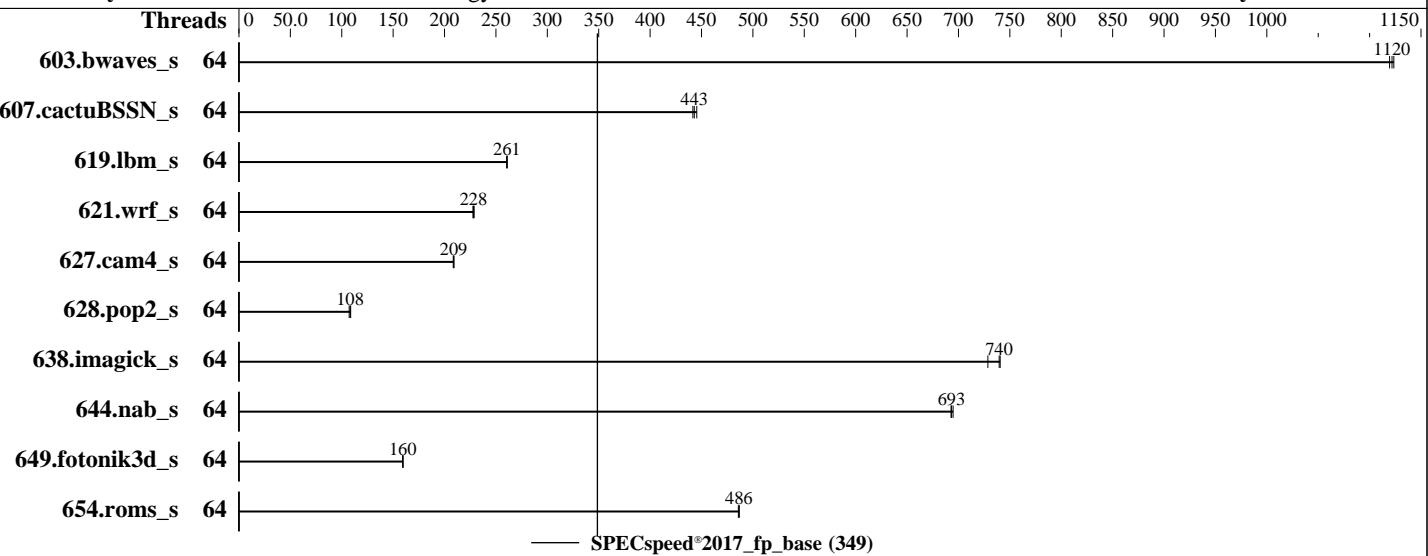

### Hardware

CPU Name: Intel Xeon 6761P  
Max MHz: 3900  
Nominal: 2500  
Enabled: 64 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 64 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 336 MB I+D on chip per chip  
Other: None  
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-88/56B-M, running at 8000)  
Storage: 1 x 960 GB NVME SSD  
Other: CPU Cooling: DLC

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
Compiler: Kernel 6.4.0-150600.21-default  
Parallel: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Firmware: Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
File System: Yes  
System State: Lenovo BIOS Version IHE109U 1.20 released Mar-2025  
Base Pointers: xfs  
Peak Pointers: Run level 3 (multi-user)  
Other: 64-bit  
Power Management: Not Applicable  
jmalloc memory allocator V5.0.1  
BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V4  
(2.50 GHz, Intel Xeon 6761P)

SPECspeed®2017\_fp\_base = 349

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	52.7	1120	52.5	1120	<b>52.6</b>	<u>1120</u>									
607.cactuBSSN_s	64	<b>37.6</b>	<u>443</u>	37.4	445	37.7	442									
619.lbm_s	64	20.1	261	20.1	261	<b>20.1</b>	<u>261</u>									
621.wrf_s	64	58.1	228	<b>58.0</b>	<u>228</u>	57.8	229									
627.cam4_s	64	<b>42.4</b>	<u>209</u>	42.4	209	42.5	208									
628.pop2_s	64	<b>110</b>	<u>108</u>	109	109	111	107									
638.imagick_s	64	<b>19.5</b>	<u>740</u>	19.5	741	19.8	729									
644.nab_s	64	25.2	693	<b>25.2</b>	<u>693</u>	25.1	695									
649.fotonik3d_s	64	<b>57.2</b>	<u>160</u>	57.2	159	57.1	160									
654.roms_s	64	<b>32.4</b>	<u>486</u>	32.4	486	32.3	487									

SPECspeed®2017\_fp\_base = 349

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V4  
(2.50 GHz, Intel Xeon 6761P)

SPECspeed®2017\_fp\_base = 349

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Platform Notes

BIOS configuration:

Workload Profile set to High Performance Computing

Hyper-Threading set to Disabled

Page Policy set to Adaptive

LLC Prefetch set to Enabled

Patrol Scrub set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Jun  6 22:57:08 2025
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

-----

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

-----

```
2. w
22:57:08 up 29 min, 1 user, load average: 21.61, 46.56, 42.87
USER   TTY     FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
```

-----

```
3. Username
From environment variable $USER: root
```

-----

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V4  
(2.50 GHz, Intel Xeon 6761P)

SPECspeed®2017\_fp\_base = 349

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Platform Notes (Continued)

```

pending signals          (-i) 1029972
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 1029972
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

---

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
sh Run2013-compliant-ic2024.1-lin-sapphirerapids-speedfp-base-smt-off-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=64 --tune base -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=64 --tune base --output_format all --define
  drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.051/templogs/preenv.fpspeed.051.0.log --lognum 051.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

```

---

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6761P
vendor_id       : GenuineIntel
cpu family     : 6
model          : 173
stepping        : 1
microcode       : 0xa0000c0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 64
siblings        : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31,64-95
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,128,130,132,13
4,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186
,188,190

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

---

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V4  
(2.50 GHz, Intel Xeon 6761P)

SPECspeed®2017\_fp\_base = 349

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Platform Notes (Continued)

CPU(s):	64
On-line CPU(s) list:	0-63
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6761P
BIOS Model name:	Intel(R) Xeon(R) 6761P UNKNOWN CPU @ 2.5GHz
BIOS CPU family:	179
CPU family:	6
Model:	173
Thread(s) per core:	1
Core(s) per socket:	64
Socket(s):	1
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	114%
CPU max MHz:	2501.0000
CPU min MHz:	800.0000
BogoMIPS:	5000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtstopology nonstop_tsc cpuid aperfmpf tsc_known_freq pn1 pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bm1l hle avx2 smep bmi2 erms invpcid rtm cqmm_rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmm_llc cqmm_occup_llc cqmm_mbm_total cqmm_mbm_local split_lock_detect user_shstx avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:	VT-x
L1d cache:	3 MiB (64 instances)
L1i cache:	4 MiB (64 instances)
L2 cache:	128 MiB (64 instances)
L3 cache:	336 MiB (1 instance)
NUMA node(s):	1
NUMA node0 CPU(s):	0-63
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSB-eIBRS
Vulnerability Srbds:	Not affected; BHI BHI_DIS_S
Vulnerability Tsx async abort:	Not affected

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V4  
(2.50 GHz, Intel Xeon 6761P)

SPECspeed®2017\_fp\_base = 349

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	64K	4M	16	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	336M	336M	16	Unified	3	344064	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-63

node 0 size: 257519 MB

node 0 free: 255455 MB

node distances:

node 0

0: 10

-----  
9. /proc/meminfo

MemTotal: 263700024 kB

-----  
10. who -r

run-level 3 Jun 6 22:28

-----  
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievfd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated	ntp_sync
indirect	systemd-userdbd wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default

root=UUID=8c76b9eb-7cab-4e58-a0ba-c4f6030335e5

splash=silent

mitigations=auto

quiet

security=apparmor

-----  
14. cpupower frequency-info

analyzing CPU 5:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V4  
(2.50 GHz, Intel Xeon 6761P)

SPECspeed®2017\_fp\_base = 349

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Platform Notes (Continued)

```
current policy: frequency should be within 800 MHz and 2.50 GHz.  
The governor "performance" may decide which speed to use  
within this range.
```

```
boost state support:
```

```
Supported: yes  
Active: yes
```

```
-----  
15. sysctl  
kernel.numa_balancing          0  
kernel.randomize_va_space      2  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages    0  
vm.swappiness                  60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor       10  
vm.zone_reclaim_mode           0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hugepage_pmd_size 2097152  
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs        60000  
defrag                      1  
max_ptes_none                511  
max_ptes_shared              256  
max_ptes_swap                64  
pages_to_scan                 4096  
scan_sleep_millisecs         10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----  
19. Disk information  
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1  
Filesystem  Type  Size  Used  Avail Use% Mounted on  
/dev/nvme0n1p2  xfs  893G  90G  804G  10%  /
```

```
-----  
20. /sys/devices/virtual/dmi/id  
Vendor:      Lenovo
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V4  
(2.50 GHz, Intel Xeon 6761P)

SPECspeed®2017\_fp\_base = 349

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Platform Notes (Continued)

Product: ThinkSystem SR650 V4  
Product Family: ThinkSystem  
Serial: 0987654321

-----  
21. dmidecode

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M327R4GA3EB0-CLVXB 32 GB 2 rank 8800, configured at 8000

-----  
22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: IHE109U-1.20  
BIOS Date: 03/15/2025  
BIOS Revision: 1.20  
Firmware Revision: 1.20

## Compiler Version Notes

=====

C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactusBSSN\_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V4  
(2.50 GHz, Intel Xeon 6761P)

SPECspeed®2017\_fp\_base = 349

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V4  
(2.50 GHz, Intel Xeon 6761P)

SPECspeed®2017\_fp\_base = 349

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-floop -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -floop -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-C.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-C.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-06 10:57:08-0400.

Report generated on 2025-07-01 19:11:59 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-01.