SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2025
Hardware Availability: Aug-2025
Software Availability: Oct-2024

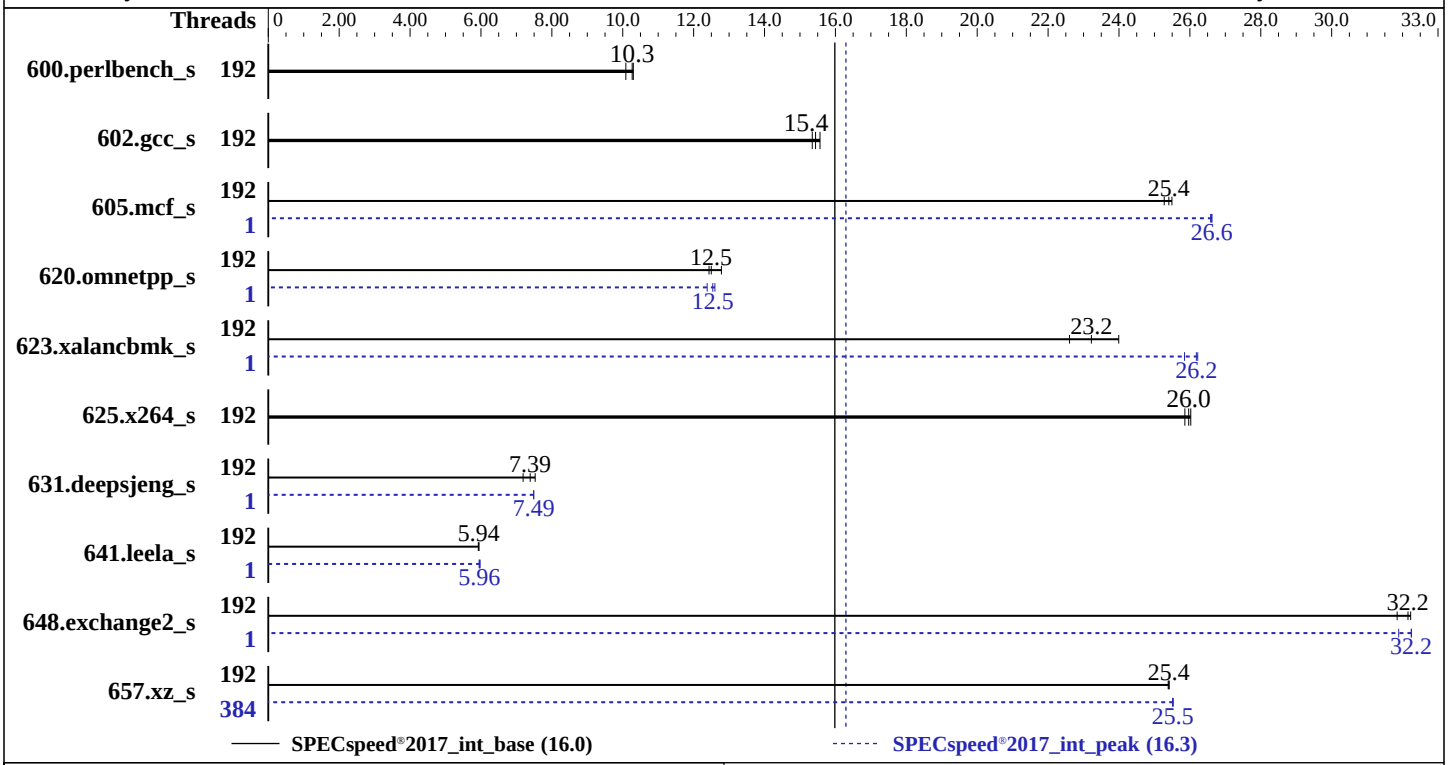

Hardware

CPU Name:	AMD EPYC 9965
Max MHz:	3700
Nominal:	2250
Enabled:	192 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 16 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage:	1 x 2.9 TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.21-default
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	HPE BIOS Version v1.10 05/27/2025 released May-2025
File System:	xfs
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2025
Hardware Availability: Aug-2025
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	176	10.1	172	10.3	**173**	**10.3**	192	176	10.1	172	10.3	**173**	**10.3**
602.gcc_s	192	256	15.6	259	15.3	**258**	**15.4**	192	256	15.6	259	15.3	**258**	**15.4**
605.mcf_s	192	185	25.5	**186**	**25.4**	187	25.3	1	177	26.6	**177**	**26.6**	178	26.6
620.omnetpp_s	192	128	12.8	**131**	**12.5**	131	12.4	1	129	12.6	**130**	**12.5**	132	12.4
623.xalancbmk_s	192	62.7	22.6	59.1	24.0	**61.0**	**23.2**	1	54.8	25.8	54.0	26.2	**54.1**	**26.2**
625.x264_s	192	68.2	25.9	**67.9**	**26.0**	67.8	26.0	192	68.2	25.9	**67.9**	**26.0**	67.8	26.0
631.deepsjeng_s	192	199	7.19	190	7.53	**194**	**7.39**	1	191	7.49	**191**	**7.49**	192	7.48
641.leela_s	192	288	5.93	**287**	**5.94**	287	5.94	1	**286**	**5.96**	286	5.98	287	5.95
648.exchange2_s	192	92.3	31.8	**91.4**	**32.2**	91.2	32.2	1	**91.2**	**32.2**	91.2	32.3	92.2	31.9
657.xz_s	192	244	25.4	243	25.4	**243**	**25.4**	384	242	25.5	**242**	**25.5**	242	25.5

SPECspeed®2017_int_base = **16.0**

SPECspeed®2017_int_peak = **16.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-383"
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "384"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-383"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configurations : Parameters are selected in the order shown below
 Workload Profile set to General Peak Frequency Compute
 Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
 Memory Patrol Scrubbing set to Disabled
 ACPI CST C2 Latency set to 18 microseconds
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 NUMA memory domains per socket set to Two memory domains per socket
 Thermal Configuration set to Maximum Cooling
 Workload Profile set to Custom
  Power Regulator set to OS Control Mode
 The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.5
```

(Continued on next page)

Platform Notes (Continued)

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Jul 11 13:55:23 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   13:55:23 up 7 min,  3 users,  load average: 0.14, 1.42, 1.31
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0    172.17.1.96      15Jun24 20.00s  0.99s  0.11s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 3093795
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
```

(Continued on next page)

Platform Notes (Continued)

```
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size             (kbytes, -s) unlimited
   cpu time              (seconds, -t) unlimited
   max user processes              (-u) 3093795
   virtual memory         (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 python3 ./run_intspeed.py
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
 runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.007/templogs/preenv.intspeed.007.0.log --lognum 007.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9965 192-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
    microcode       : 0xb101047
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 192
    siblings        : 384
    1 physical ids (chips)
    384 processors (hardware threads)
    physical id 0: core ids 0-191
    physical id 0: apicids 0-383
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               384
  On-line CPU(s) list:                  0-383
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
  Model name:                           AMD EPYC 9965 192-Core Processor
  BIOS Model name:                      AMD EPYC 9965 192-Core Processor                CPU @ 2.2GHz
  BIOS CPU family:                      107
  CPU family:                           26
```

(Continued on next page)

Platform Notes (Continued)

```
  Model:                               17
  Thread(s) per core:                  2
  Core(s) per socket:                  192
  Socket(s):                           1
  Stepping:                            0
  Frequency boost:                     enabled
  CPU(s) scaling MHz:                  101%
  CPU max MHz:                         2250.0000
  CPU min MHz:                         1500.0000
  BogoMIPS:                            4493.35
  Flags:                               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                       pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                       rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                       extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                       sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                       cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                       osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                       perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                       ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                       smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                       avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                       xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                       cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                       xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                       nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                       pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                       avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                       avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                       movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                       flush_l1d debug_swap
  Virtualization:                      AMD-V
  L1d cache:                           9 MiB (192 instances)
  L1i cache:                           6 MiB (192 instances)
  L2 cache:                            192 MiB (192 instances)
  L3 cache:                            384 MiB (12 instances)
  NUMA node(s):                        12
  NUMA node0 CPU(s):                   0-15,192-207
  NUMA node1 CPU(s):                   16-31,208-223
  NUMA node2 CPU(s):                   32-47,224-239
  NUMA node3 CPU(s):                   48-63,240-255
  NUMA node4 CPU(s):                   64-79,256-271
  NUMA node5 CPU(s):                   80-95,272-287
  NUMA node6 CPU(s):                   96-111,288-303
  NUMA node7 CPU(s):                   112-127,304-319
  NUMA node8 CPU(s):                   128-143,320-335
  NUMA node9 CPU(s):                   144-159,336-351
  NUMA node10 CPU(s):                  160-175,352-367
  NUMA node11 CPU(s):                  176-191,368-383
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
```

(Continued on next page)

Platform Notes (Continued)

```
                                       always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1    64        1             64
     L1i       32K       6M    8 Instruction     1    64        1             64
     L2         1M     192M   16 Unified         2  1024        1             64
     L3        32M     384M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 12 nodes (0-11)
  node 0 cpus: 0-15,192-207
  node 0 size: 64124 MB
  node 0 free: 63716 MB
  node 1 cpus: 16-31,208-223
  node 1 size: 64503 MB
  node 1 free: 64230 MB
  node 2 cpus: 32-47,224-239
  node 2 size: 64503 MB
  node 2 free: 64294 MB
  node 3 cpus: 48-63,240-255
  node 3 size: 64503 MB
  node 3 free: 64256 MB
  node 4 cpus: 64-79,256-271
  node 4 size: 64503 MB
  node 4 free: 64287 MB
  node 5 cpus: 80-95,272-287
  node 5 size: 64503 MB
  node 5 free: 64283 MB
  node 6 cpus: 96-111,288-303
  node 6 size: 64503 MB
  node 6 free: 63637 MB
  node 7 cpus: 112-127,304-319
  node 7 size: 64503 MB
  node 7 free: 64284 MB
  node 8 cpus: 128-143,320-335
  node 8 size: 64358 MB
  node 8 free: 63995 MB
  node 9 cpus: 144-159,336-351
  node 9 size: 64465 MB
  node 9 free: 64251 MB
  node 10 cpus: 160-175,352-367
  node 10 size: 64503 MB
  node 10 free: 64295 MB
  node 11 cpus: 176-191,368-383
  node 11 size: 64503 MB
  node 11 free: 63760 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11
    0:  10  11  11  11  11  11  12  12  12  12  12  12
    1:  11  10  11  11  11  11  12  12  12  12  12  12
    2:  11  11  10  11  11  11  12  12  12  12  12  12
    3:  11  11  11  10  11  11  12  12  12  12  12  12
    4:  11  11  11  11  10  11  12  12  12  12  12  12
    5:  11  11  11  11  11  10  12  12  12  12  12  12
    6:  12  12  12  12  12  12  10  11  11  11  11  11
```

(Continued on next page)

Platform Notes (Continued)

```
     7:  12  12  12  12  12  12  11  10  11  11  11  11
     8:  12  12  12  12  12  12  11  11  10  11  11  11
     9:  12  12  12  12  12  12  11  11  11  10  11  11
    10:  12  12  12  12  12  12  11  11  11  11  10  11
    11:  12  12  12  12  12  12  11  11  11  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792042656 kB

------------------------------------------------------------
10. who -r
  run-level 5 Jun 15 21:22

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                   bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
                   lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback
                   rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                   wickedd-nanny wpa_supplicant
  enabled-runtime  systemd-remount-fs
  disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                   autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                   chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables
                   exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd
                   issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@
                   ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
                   smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
  indirect         pcscd saned@ systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=3e491841-6770-49cb-971b-19b95280c956
  splash=silent
  resume=/dev/disk/by-uuid/191e4613-2a6c-45aa-ad42-fb8ad9d4619a
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 188:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                     8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme1n1p3 xfs   2.2T   64G  2.1T   3% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        HPE ProLiant Compute DL345 Gen12
    Product Family: ProLiant
    Serial:         SANJACSCM
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     12x Hynix HMCG94AHBRA480N 64 GB 2 rank 6400, configured at 5200


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      1.10
    BIOS Date:         05/27/2025
    BIOS Revision:     1.10
    Firmware Revision: 1.13
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: `basepeak = yes`

602.gcc_s: `basepeak = yes`

605.mcf_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

625.x264_s: `basepeak = yes`

657.xz_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

C++ benchmarks:

620.omnetpp_s: `-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt -fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang`

623.xalancbmk_s: `-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3`

(Continued on next page)

Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.6.html
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html

Copyright 2017-2025 Standard Performance Evaluation Corporation

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.6.xml
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-11 04:25:23-0400.
Report generated on 2025-07-30 15:12:36 by CPU2017 PS formatter v6716.
Originally published on 2025-07-29.