SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9354)
AMD EPYC 9354

SPECrate®2017_fp_base = 880

SPECrate®2017_fp_peak = 847

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: FusionStor system

Test Date: Jul-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

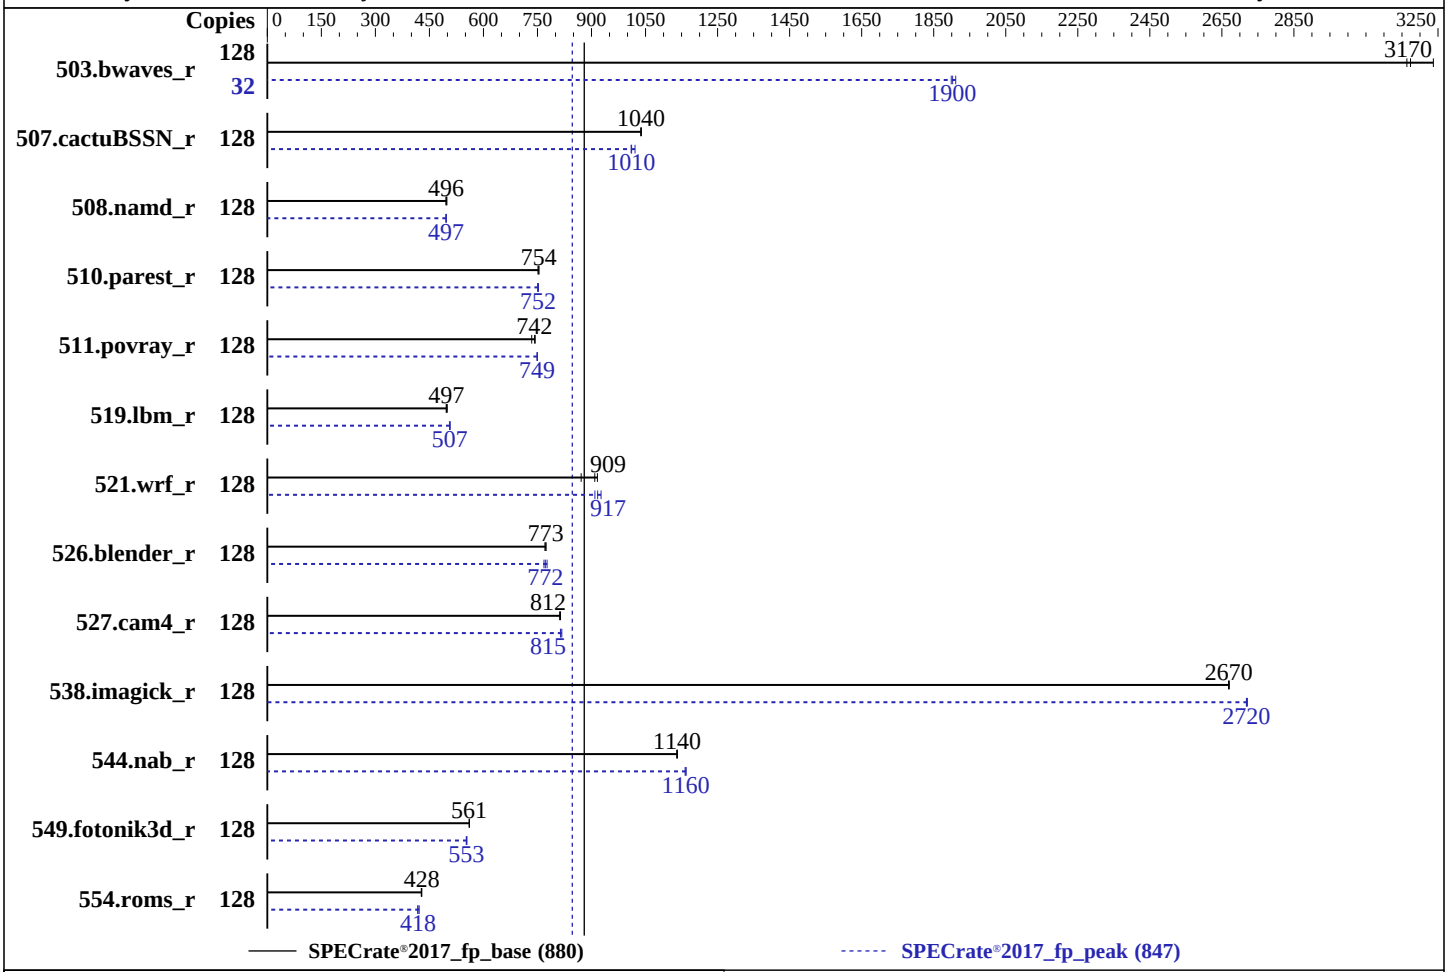

Hardware

CPU Name:	AMD EPYC 9354
Max MHz:	3800
Nominal:	3250
Enabled:	64 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 4 cores
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC5-5600B-R, running at 4800)
Storage:	960 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 22.04.5 LTS kernel version 6.8.0-57-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	Version 5.27 released Nov-2024
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	OS set to prefer performance at the expense of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	406	3160	**404**	**3170**	397	3240	32	**169**	**1900**	168	1910	169	1900
507.cactuBSSN_r	128	156	1040	**156**	**1040**	156	1040	128	**160**	**1010**	159	1020	160	1010
508.namd_r	128	244	499	245	496	**245**	**496**	128	245	496	245	497	**245**	**497**
510.parest_r	128	444	754	446	751	**444**	**754**	128	445	753	**445**	**752**	446	750
511.povray_r	128	**403**	**742**	407	734	402	744	128	399	749	**399**	**749**	399	750
519.lbm_r	128	272	497	**271**	**497**	270	500	128	**266**	**507**	266	507	266	506
521.wrf_r	128	**315**	**909**	313	916	329	871	128	**313**	**917**	315	909	309	926
526.blender_r	128	252	773	**252**	**773**	253	771	128	251	777	**253**	**772**	254	768
527.cam4_r	128	**276**	**812**	275	814	276	812	128	**275**	**815**	275	814	274	818
538.imagick_r	128	**119**	**2670**	119	2670	119	2670	128	**117**	**2720**	117	2720	117	2720
544.nab_r	128	189	1140	**189**	**1140**	190	1140	128	**185**	**1160**	186	1160	185	1160
549.fotonik3d_r	128	889	561	**890**	**561**	890	560	128	900	554	903	552	**903**	**553**
554.roms_r	128	475	429	**475**	**428**	476	427	128	487	418	**486**	**418**	482	422

SPECrate®2017_fp_base = 880

SPECrate®2017_fp_peak = 847

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
      "/home/speccpu/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/speccpu/cpu2017/amd_rate_aocc500_znver5
      _A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6
```

Platform Notes

```
 Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on AMD Wed Jul 23 17:07:36 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
```

(Continued on next page)

Platform Notes (Continued)

```
  Linux AMD 6.8.0-57-generic #59~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Wed Mar 19 17:07:41 UTC 2 x86_64 x86_64
  x86_64 GNU/Linux

------------------------------------------------------------
2. w
   17:07:36 up 2 days,  6:03,  2 users,  load average: 64.79, 110.74, 120.96
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  test     :1       :1               21Apr25 ?xdm?  35:56   0.00s /usr/libexec/gdm-x-session --run-script env
  GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
  test     pts/1    -                21Apr25  4:58m  2.50s  0.46s sudo su

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       test

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              3094507
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init splash
 /lib/systemd/systemd --user
 /usr/libexec/gnome-terminal-server
 bash
 sudo su
 sudo su
 su
 bash
 python3 ./run_amd_rate_aocc500_znver5_A1.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9354 32-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 1
    microcode       : 0xa101148
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 3584 4K pages
```

(Continued on next page)

Platform Notes (Continued)

```
     cpu cores       : 32
     siblings        : 64
     2 physical ids (chips)
     128 processors (hardware threads)
     physical id 0: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
     physical id 1: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
     physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
     physical id 1: apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               128
   On-line CPU(s) list:                  0-127
   Vendor ID:                            AuthenticAMD
   Model name:                           AMD EPYC 9354 32-Core Processor
   CPU family:                           25
   Model:                                17
   Thread(s) per core:                   2
   Core(s) per socket:                   32
   Socket(s):                            2
   Stepping:                             1
   Frequency boost:                      enabled
   CPU max MHz:                          3799.0720
   CPU min MHz:                          1500.0000
   BogoMIPS:                             6499.86
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                         extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                         sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                         cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                         osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                         perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                         ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                                         erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                         clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                         xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                         user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                                         amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale
                                         vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                                         v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                                         ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                         avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                                         debug_swap
   Virtualization:                       AMD-V
   L1d cache:                            2 MiB (64 instances)
   L1i cache:                            2 MiB (64 instances)
   L2 cache:                             64 MiB (64 instances)
   L3 cache:                             512 MiB (16 instances)
   NUMA node(s):                         2
   NUMA node0 CPU(s):                    0-31,64-95
   NUMA node1 CPU(s):                    32-63,96-127
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Mitigation; Safe RET
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       2M    8 Data            1    64        1             64
     L1i       32K       2M    8 Instruction     1    64        1             64
     L2         1M      64M    8 Unified         2  2048        1             64
     L3        32M     512M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-31,64-95
  node 0 size: 386704 MB
  node 0 free: 383663 MB
  node 1 cpus: 32-63,96-127
  node 1 size: 386999 MB
  node 1 free: 384271 MB
  node distances:
  node   0   1
    0:  10  32
    1:  32  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792273252 kB

------------------------------------------------------------
10. who -r
  run-level 5 Apr 21 18:51

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                  LOAD   ACTIVE SUB    DESCRIPTION
  * fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
```

(Continued on next page)

Platform Notes (Continued)

```
                  accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups
                  cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
                  irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon
                  rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oomd systemd-pstore
                  systemd-resolved thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades
                  wpa_supplicant
  enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled        acpid brltty console-getty debug-shell ipmievd nftables openvpn-client@ openvpn-server@
                  openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd
                  systemd-boot-check-no-failures systemd-network-generator systemd-networkd
                  systemd-networkd-wait-online systemd-sysext systemd-time-wait-sync systemd-timesyncd
                  upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
  generated       apport openipmi speech-dispatcher
  indirect        saned@ spice-vdagentd uuidd
  masked          alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
                  screen-cleanup sudo x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-57-generic
  root=UUID=e953dd87-e49e-4230-a412-5a6320fe39a0
  ro
  quiet
  splash
  vt.handoff=7

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 37:
    current policy: frequency should be within 1.50 GHz and 3.25 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  3250MHz

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.5 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/speccpu/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      ext4  879G   38G  797G   5% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:          FusionStor
    Product:         Fusionstor_Invento_i6000_EPYC_Series
    Product Family: Server
    Serial:          GNG6PB312A0006

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    3x Samsung M321R4GA3PB0-CWMCJ 32 GB 2 rank 5600, configured at 4800
    21x Samsung M321R4GA3PB0-CWMXJ 32 GB 2 rank 5600, configured at 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       FUSIONSTOR
   BIOS Version:      F18
   BIOS Date:         10/11/2024
   BIOS Revision:     5.27
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64`
526.blender_r: `-funsigned-char -DSPEC_LP64`
527.cam4_r: `-DSPEC_CASE_FLAG -DSPEC_LP64`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:
```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:
```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc -ldl`

538.imagick_r: `Same as 519.lbm_r`

544.nab_r: `-m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000`

(Continued on next page)

Peak Optimization Flags (Continued)

544.nab_r (continued):
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

C++ benchmarks:

508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

Fortran benchmarks:

503.bwaves_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)

Peak Optimization Flags (Continued)

521.wrf_r (continued):
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl

526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-faggressive-loop-transform -fvector-transform -fscalar-transform
-Mrecursive -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html
http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml
http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-23 07:37:35-0400.
Report generated on 2025-12-12 09:58:42 by CPU2017 PS formatter v6716.
Originally published on 2025-12-12.