



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

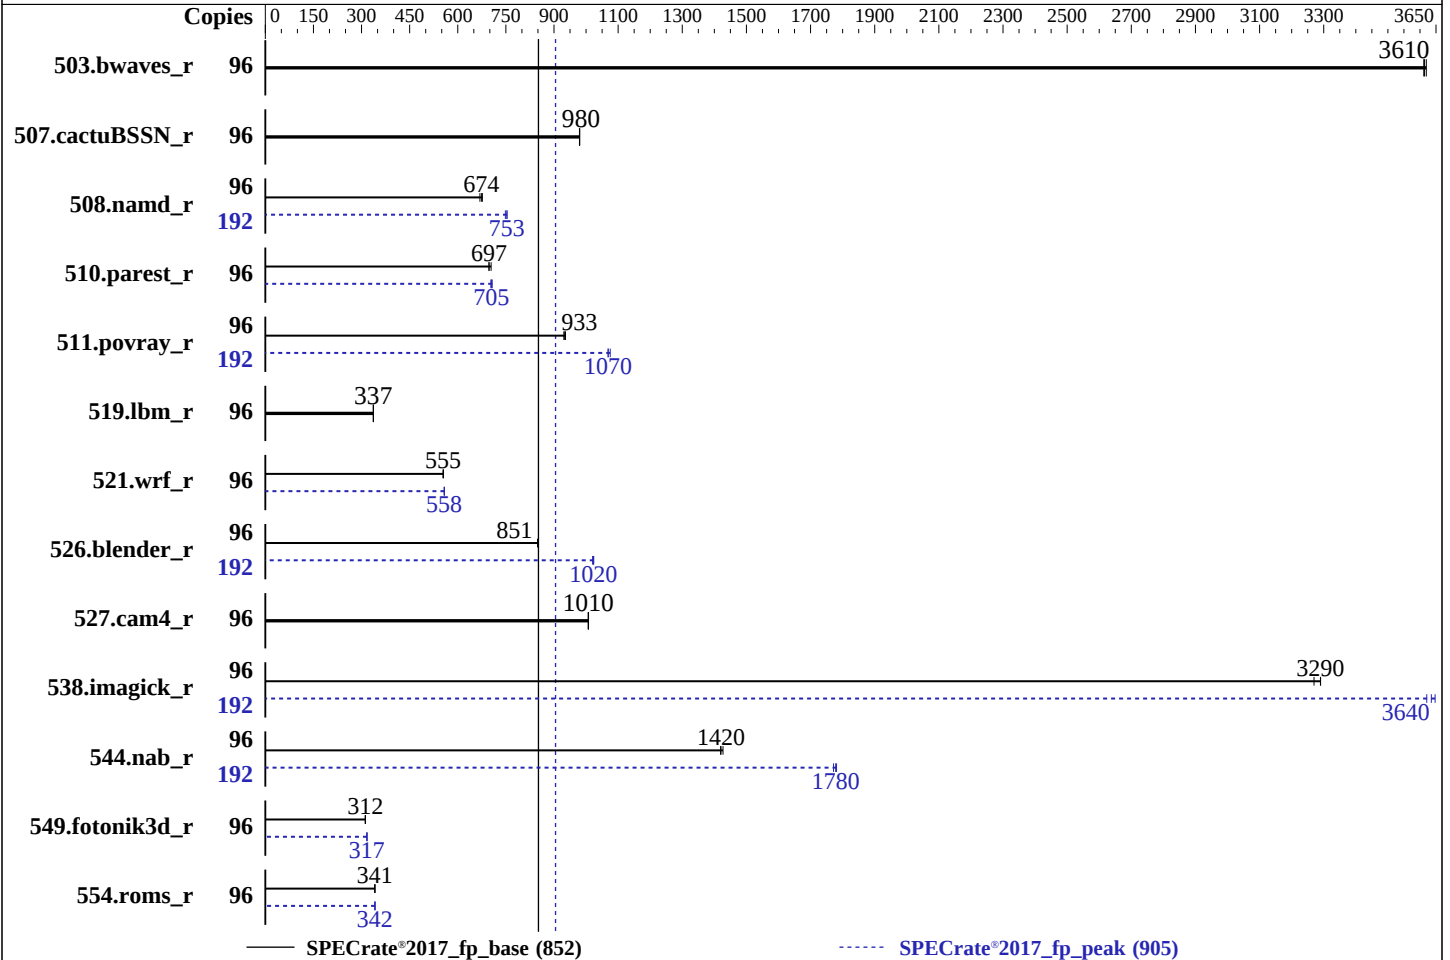

Hardware

CPU Name: AMD EPYC 9645
Max MHz: 3700
Nominal: 2300
Enabled: 96 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 12 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 3 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: HPE BIOS Version v1.20 07/11/2025 released Jul-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	266	3610	266	3620	267	3610	96	266	3610	266	3620	267	3610
507.cactuBSSN_r	96	124	980	124	979	124	980	96	124	980	124	979	124	980
508.namd_r	96	135	674	136	669	135	677	192	242	753	244	748	242	754
510.parest_r	96	357	704	360	697	360	697	96	355	707	357	703	356	705
511.povray_r	96	240	936	240	933	241	931	192	417	1080	419	1070	420	1070
519.lbm_r	96	300	337	300	337	300	337	96	300	337	300	337	300	337
521.wrf_r	96	388	555	388	555	387	555	96	385	558	385	558	386	558
526.blender_r	96	172	851	172	849	172	851	192	286	1020	286	1020	287	1020
527.cam4_r	96	167	1010	167	1010	167	1010	96	167	1010	167	1010	167	1010
538.imagick_r	96	72.6	3290	72.6	3290	73.0	3270	192	131	3650	132	3620	131	3640
544.nab_r	96	114	1420	113	1430	114	1420	192	181	1780	182	1770	182	1780
549.fotonik3d_r	96	1200	312	1199	312	1200	312	96	1181	317	1181	317	1181	317
554.roms_r	96	447	341	447	341	446	342	96	447	341	446	342	446	342

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to High Performance Compute (HPC)

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Enhanced CPU Cooling

AMD Periodic Directory Rinse set to Periodic

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Sep 10 00:44:36 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/1p)
x86_64 x86_64 x86_64 GNU/Linux
-----

2. w
00:44:36 up 5:47, 2 users, load average: 96.73, 163.57, 176.75
USER      TTY      FROM      LOGIN@   IDLE   JCPU   PCPU WHAT
-----

3. Username
From environment variable $USER: root
-----

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3094433
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3094433
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
SCREEN -S cpu
/bin/bash
python3 ./run_intrate.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.041/temlogs/preenv.fprate.041.0.log --lognum 041.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

\$SPEC = /home/cpu2017

6. /proc/cpuinfo

```
model name      : AMD EPYC 9645 96-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 17
stepping        : 0
microcode       : 0xb10104e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 96
siblings        : 192
1 physical ids (chips)
192 processors (hardware threads)
physical id 0:  core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
physical id 0:  apicids 0-23,32-55,64-87,96-119,128-151,160-183,192-215,224-247
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             192
On-line CPU(s) list: 0-191
Vendor ID:          AuthenticAMD
Model name:         AMD EPYC 9645 96-Core Processor
CPU family:         26
Model:              17
Thread(s) per core: 2
Core(s) per socket: 96
Socket(s):          1
Stepping:           0
Frequency boost:    enabled
CPU(s) scaling MHz: 103%
CPU max MHz:        2300.0000
CPU min MHz:        1500.0000
BogoMIPS:           4599.86
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                    extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                    sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
                    cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                    osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                    smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                    xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                    nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                    pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap
L1d cache: 4.5 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 96 MiB (96 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-11,96-107
NUMA node1 CPU(s): 12-23,108-119
NUMA node2 CPU(s): 24-35,120-131
NUMA node3 CPU(s): 36-47,132-143
NUMA node4 CPU(s): 48-59,144-155
NUMA node5 CPU(s): 60-71,156-167
NUMA node6 CPU(s): 72-83,168-179
NUMA node7 CPU(s): 84-95,180-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-11,96-107
node 0 size: 96446 MB
node 0 free: 89075 MB
node 1 cpus: 12-23,108-119
node 1 size: 96761 MB
node 1 free: 95877 MB
node 2 cpus: 24-35,120-131
node 2 size: 96761 MB
node 2 free: 95817 MB
node 3 cpus: 36-47,132-143
node 3 size: 96761 MB
node 3 free: 95809 MB
node 4 cpus: 48-59,144-155
node 4 size: 96761 MB
node 4 free: 95861 MB
node 5 cpus: 60-71,156-167

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 5 size: 96761 MB
node 5 free: 92771 MB
node 6 cpus: 72-83,168-179
node 6 size: 96723 MB
node 6 free: 95631 MB
node 7 cpus: 84-95,180-191
node 7 size: 96662 MB
node 7 free: 95691 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  11  12  12  12  12  12  12
1:  11  10  12  12  12  12  12  12
2:  12  12  10  11  12  12  12  12
3:  12  12  11  10  12  12  12  12
4:  12  12  12  12  10  11  12  12
5:  12  12  12  12  11  10  12  12
6:  12  12  12  12  12  12  10  11
7:  12  12  12  12  12  12  11  10
```

```
-----
9. /proc/meminfo
MemTotal:      792206500 kB
```

```
-----
10. who -r
run-level 5 Sep 9 18:57
```

```
-----
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
Default Target   Status
graphical        running
```

```
-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
           bluetooth cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings klog
           lvm2-monitor nscd nvme-fc-boot-connections nvme-fc-autoconnect oracle postfix purge-kernels
           rollback rsyslog sapconf smartd sshd systemctl-logger systemd-pstore virtqemu virtxend
           wickd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant xencommons
enabled-runtime systemd-fsck-root systemd-remount-fs
disabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
           apache2@ autofs autovast-initscripts bgpd blk-availability bluetooth-mesh
           boot-systemd booth-arbitrator booth@ ca-certificates certmonger chrony-wait chronyd
           clamav-milter clamd clamonacc console-getty corosync corosync-notifyd crm_mon ctdb cups
           cups-browsed ddclient debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dirsrv@ dlm dnsmasq drbd
           drbd-lvchange@ drbd-wait-promotable@ ebttables exchange-bmc-os-info fetchmail firewall
           fsidd gpm grub2-once haveged hawk hwloc-dump-hwdata ipmi ipmievd ipvsadm iscsi-init iscsid
           isisd issue-add-ssh-keys kexec-load ksm kvm_stat ldirectord libvirt-guests logd lunmask
           lvmlckd lvmlckd man-db-create mariadb mariadb@ multipathd named nfs nfs-blkmap
           nfs-server nfs-server nmb openvpn@ ospf6d ospfd ostree-remount pacemaker racoon
           racoon-setkey radvd rarpd@ ripd ripngd rpcbind rpmconfigcheck rsyncd rtkit-daemon sanlock
           sbd sbd_remote serial-getty@ smartd_generate_opts smb snmpd snmptrapd spamd spampd
           speech-dispatcher squid srp_daemon srp_daemon_port@ strongswan strongswan-starter sysstat
           systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-nspawn@
           systemd-sysextd systemd-time-wait-sync systemd-timesyncd tcsd udisks2
           update-system-flatpaks upower virtinterfaced virtlockd virtlogd virtnetworkd virtnodedevd
           virtnwfilterd virtsecret virtstoraged vncserver@ vsftpd wdm winbind wpa_supplicant@
           xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend xen-watchdog xenconsoled
           xendomains xenstored zebra
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

indirect pcsd saned@ systemd-userdbd tftp uidd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=31eb4e3c-f432-4a30-b618-dd595ca988cb
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 128:
  current policy: frequency should be within 1.50 GHz and 2.30 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

15. sysctl

```
kernel.numa_balancing          0
kernel.randomize_va_space      0
vm.compaction_proactiveness     20
vm.dirty_background_bytes       314572800
vm.dirty_background_ratio      0
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                    1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

18. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme3n1p3	ext4	2.9T	20G	2.7T	1%	/

20. /sys/devices/virtual/dmi/id

Vendor: HPE
Product: HPE ProLiant Compute DL325 Gen12
Product Family: ProLiant
Serial: SANJACSCM

21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

6x Micron MTC40F2046S1RC64BD2 MWWF 64 GB 2 rank 6400, configured at 5200
6x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 07/11/2025
BIOS Revision: 1.20
Firmware Revision: 1.16

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

544.nab_r: -m64 -flto -Wl, -mllvm -Wl, -ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

C++ benchmarks:

508.namd_r: -m64 -std=c++14
-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

508.namd_r (continued):

```
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

510.parest_r: -m64 -std=c++14 -flto -Wl, -mllvm -Wl, -suppress-fmas

```
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

```
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

554.roms_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

```
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang
```

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

```
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl
```

```
526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 905

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Other Flags (Continued)

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-10 01:44:35-0400.

Report generated on 2025-11-05 12:08:15 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-04.