



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573


Test Date: Nov-2025

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2025

Tested by: Dell Inc.

Software Availability: Oct-2025

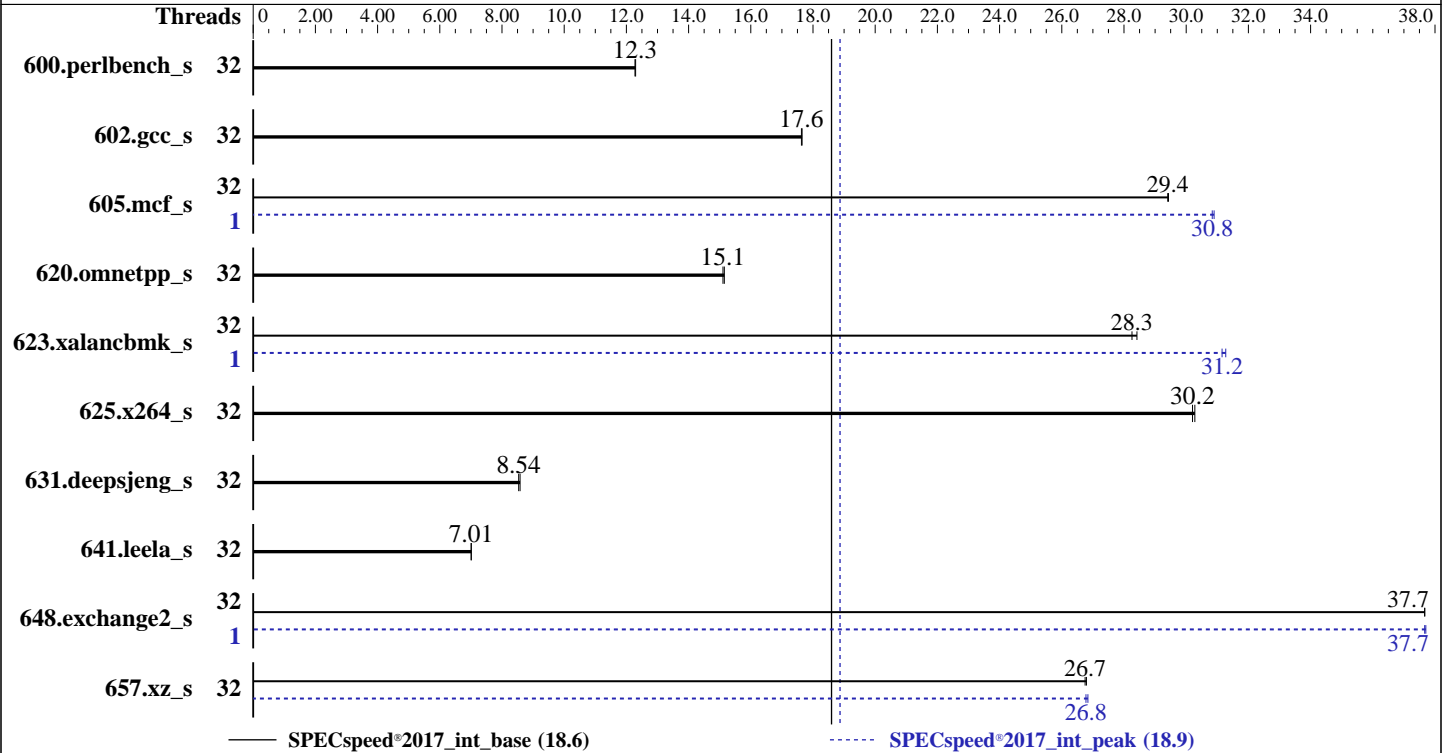

Hardware

CPU Name: AMD EPYC 9335
 Max MHz: 4400
 Nominal: 3000
 Enabled: 32 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
 Storage: 40 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.3 LTS
 6.8.0-86-generic
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.3.3 released Jun-2025
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Nov-2025

Software Availability: Oct-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	144	12.3	145	12.3			32	144	12.3	145	12.3		
602.gcc_s	32	226	17.6	226	17.6			32	226	17.6	226	17.6		
605.mcf_s	32	161	29.4	160	29.4			1	153	30.8	153	30.9		
620.omnetpp_s	32	108	15.1	108	15.1			32	108	15.1	108	15.1		
623.xalancbmk_s	32	49.9	28.4	50.1	28.3			1	45.3	31.3	45.5	31.2		
625.x264_s	32	58.4	30.2	58.3	30.3			32	58.4	30.2	58.3	30.3		
631.deepsjeng_s	32	167	8.58	168	8.54			32	167	8.58	168	8.54		
641.leela_s	32	243	7.01	243	7.01			32	243	7.01	243	7.01		
648.exchange2_s	32	78.1	37.7	78.0	37.7			1	78.0	37.7	78.1	37.7		
657.xz_s	32	231	26.7	231	26.8			32	230	26.8	231	26.8		

SPECspeed®2017_int_base = 18.6

SPECspeed®2017_int_peak = 18.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Nov-2025

Software Availability: Oct-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-31"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_speed_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "32"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-31"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Logical Processor : Disabled

Virtualization Technology : Disabled

NUMA Nodes Per Socket : 4

System Profile : Custom

C-States : Disabled

Memory Patrol Scrub : Disabled

PCI ASPM L1 Link Power Management : Disabled

Periodic Directory Rinse Tuning : Blended

Determinism Control : Manual

Determinism Slider : Power Determinism

Optimizer Mode : Enabled

Algorithm Performance Boost Disable : Enabled

Adaptive Allocation : Enabled

Dram Refresh Delay : Performance

DIMM Self Healing -

on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on SLR7751-R7715 Mon Nov 10 18:03:42 2025

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Nov-2025

Software Availability: Oct-2025

Platform Notes (Continued)

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.10)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux SLR7751-R7715 6.8.0-86-generic #87-Ubuntu SMP PREEMPT_DYNAMIC Mon Sep 22 18:03:36 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
18:03:42 up 3 min, 1 user, load average: 0.28, 0.08, 0.02
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1     -             18:02   46.00s  1.35s  0.35s  /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3093025
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2025
Hardware Availability: Nov-2025
Software Availability: Oct-2025

Platform Notes (Continued)

```

5. sysinfo process ancestry
/bin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=6.3b --output_format
html, pdf, txt
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define DL-VERS=6.3b
--output_format html, pdf, txt intspeak
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-VERS=6.3b --output_format html, pdf, txt --nopower --runmode speed --tune base:peak --size
test:train:refspeak intspeak --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeak.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9335 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002151
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 32
siblings       : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55
physical id 0: apicids 0-7,16-23,32-39,48-55
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       AMD
Model name:            AMD EPYC 9335 32-Core Processor
BIOS Model name:      AMD EPYC 9335 32-Core Processor
BIOS CPU family:      107
CPU family:            26
Model:                 2
Thread(s) per core:   1
Core(s) per socket:   32
Socket(s):             1
Stepping:              1

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2025
Hardware Availability: Nov-2025
Software Availability: Oct-2025

Platform Notes (Continued)

```

Frequency boost:          enabled
CPU(s) scaling MHz:      63%
CPU max MHz:             3000.0000
CPU min MHz:             1500.0000
BogoMIPS:                5991.26
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                          pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                          rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                          extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                          sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                          cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                          osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
                          perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                          ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bml avx2
                          smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                          avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                          xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                          cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                          xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                          svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                          pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                          vnni avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                          avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                          movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
                          flush_lld debug_swap
Lld cache:               1.5 MiB (32 instances)
L1i cache:               1 MiB (32 instances)
L2 cache:                32 MiB (32 instances)
L3 cache:                128 MiB (4 instances)
NUMA node(s):            4
NUMA node0 CPU(s):      0-7
NUMA node1 CPU(s):      8-15
NUMA node2 CPU(s):      16-23
NUMA node3 CPU(s):      24-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:            Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:            Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                  disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:               Not affected
Vulnerability Tsx async abort:     Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL  SETS  PHY-LINE  COHERENCY-SIZE
L1d   48K    1.5M   12 Data             1     64     1         64
L1i   32K    1M     8 Instruction       1     64     1         64
L2    1M     32M   16 Unified          2   1024     1         64
L3    32M   128M   16 Unified          3  32768     1         64

```

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2025
Hardware Availability: Nov-2025
Software Availability: Oct-2025

Platform Notes (Continued)

```

available: 4 nodes (0-3)
node 0 cpus: 0-7
node 0 size: 192825 MB
node 0 free: 192386 MB
node 1 cpus: 8-15
node 1 size: 193488 MB
node 1 free: 193060 MB
node 2 cpus: 16-23
node 2 size: 193532 MB
node 2 free: 187516 MB
node 3 cpus: 24-31
node 3 size: 193487 MB
node 3 free: 193146 MB
node distances:
node  0  1  2  3
  0:  10  12  12  12
  1:  12  10  12  12
  2:  12  12  10  12
  3:  12  12  12  10

```

```

-----
9. /proc/meminfo
   MemTotal:      791894092 kB

```

```

-----
10. who -r
    run-level 5 Nov 10 18:02

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.10)
    Default Target   Status
    graphical        degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD  ACTIVE SUB    DESCRIPTION
* openafs-client.service            loaded failed failed OpenAFS client
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured
Legend: LOAD -> Reflects whether the unit definition was properly loaded.
         ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
         SUB -> The low-level unit activation state, values depend on unit type.
2 loaded units listed.

```

```

-----
13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd
networkd-dispatcher open-iscsi open-vm-tools openafs-client pollinate rsyslog
secureboot-db setvtrgb sysstat systemd-networkd systemd-networkd-wait-online
systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage
udisks2 ufw vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
systemd-time-wait-sync upower

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Nov-2025

Software Availability: Oct-2025

Platform Notes (Continued)

```

generated          netperf
indirect           systemd-sysupdate systemd-sysupdate-reboot uidd
masked             cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-86-generic
root=UUID=blff2144-e7e5-49f5-9136-cc043a5838f9
ro

```

```

-----
15. cpupower frequency-info
analyzing CPU 13:
  current policy: frequency should be within 1.50 GHz and 3.00 GHz.
                  The governor "schedutil" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 3000MHz

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2025
Hardware Availability: Nov-2025
Software Availability: Oct-2025

Platform Notes (Continued)

scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 40G 3.3G 37G 9% /mnt/ramdisk

21. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R7715
Product Family: PowerEdge
Serial: SLR7751

22. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
12x 802C0000802C MTC40F2046S1RC64BD1 64 GB 2 rank 6400, configured at 5200

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.3.3
BIOS Date: 06/26/2025
BIOS Revision: 1.3

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

C++ | 620.omnetpp_s(base, peak) 623.xalancbnk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Nov-2025

Software Availability: Oct-2025

Compiler Version Notes (Continued)

=====
Fortran | 648.exchange2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Nov-2025

Software Availability: Oct-2025

Base Optimization Flags (Continued)

C benchmarks (continued):

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Nov-2025

Software Availability: Oct-2025

Peak Compiler Invocation (Continued)

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: basepeak = yes

657.xz_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

C++ benchmarks:

620.omnetpp_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Nov-2025

Software Availability: Oct-2025

Peak Optimization Flags (Continued)

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Nov-2025

Software Availability: Oct-2025

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-11-10 13:03:42-0500.
Report generated on 2025-12-03 14:24:36 by CPU2017 PDF formatter v6716.
Originally published on 2025-12-02.