SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6715 (AMD EPYC 9135 16-Core Processor)

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 17.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2025
Hardware Availability: Nov-2025
Software Availability: Oct-2025

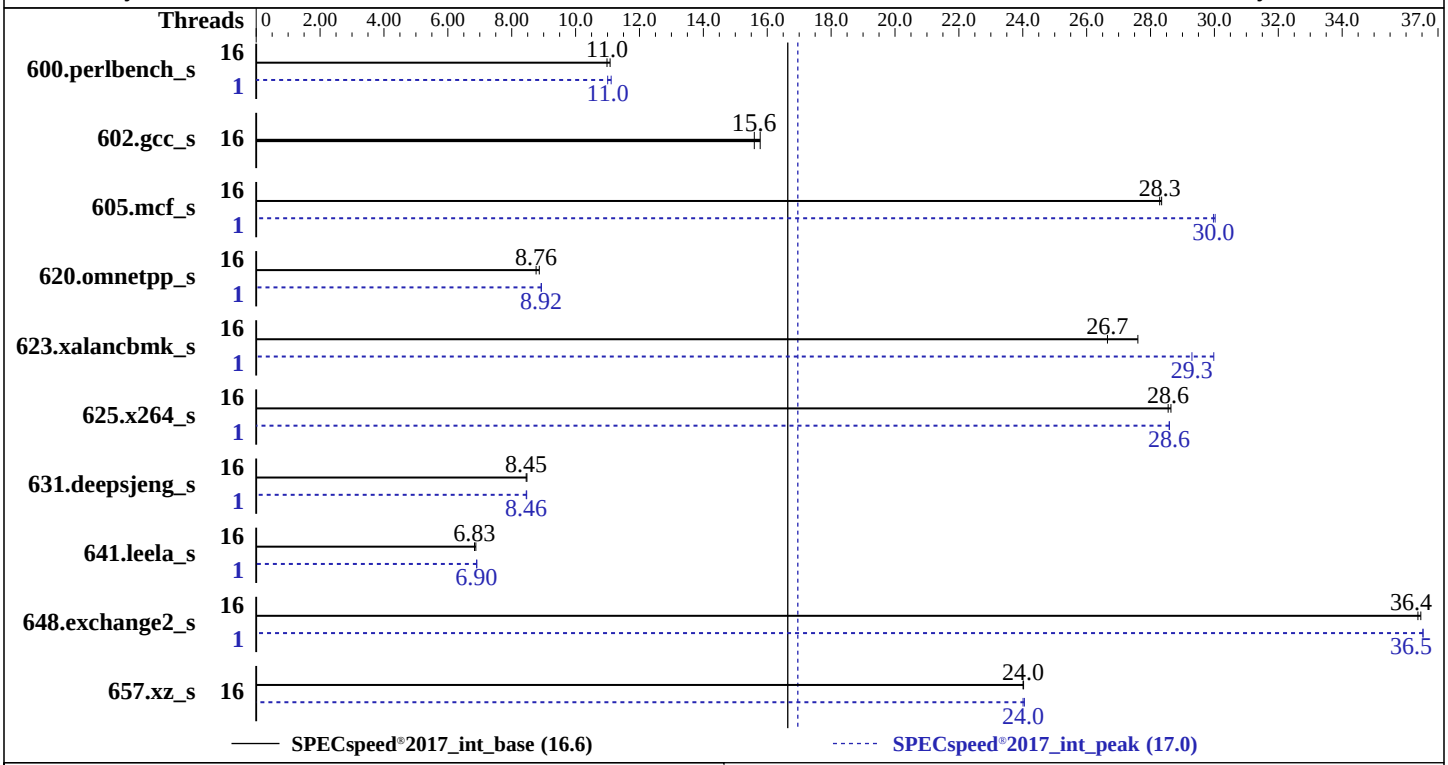

Hardware

CPU Name:	AMD EPYC 9135
Max MHz:	4300
Nominal:	3650
Enabled:	16 cores, 1 chip
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	64 MB I+D on chip per chip, 16 MB shared / 4 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage:	40 GB on tmpfs
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 24.04.2 LTS 6.8.0-86-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 1.3.3 released Jun-2025
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6715 (AMD EPYC 9135 16-Core Processor)

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 17.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2025
Hardware Availability: Nov-2025
Software Availability: Oct-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	160	11.1	**162**	**11.0**			1	**161**	**11.0**	160	11.1		
602.gcc_s	16	252	15.8	**255**	**15.6**			16	252	15.8	**255**	**15.6**		
605.mcf_s	16	**167**	**28.3**	167	28.3			1	**158**	**30.0**	157	30.0		
620.omnetpp_s	16	184	8.86	**186**	**8.76**			1	183	8.93	**183**	**8.92**		
623.xalancbmk_s	16	**53.2**	**26.7**	51.3	27.6			1	**48.4**	**29.3**	47.3	30.0		
625.x264_s	16	61.6	28.6	**61.8**	**28.6**			1	61.7	28.6	**61.7**	**28.6**		
631.deepsjeng_s	16	169	8.48	**170**	**8.45**			1	**169**	**8.46**	169	8.47		
641.leela_s	16	**250**	**6.83**	248	6.88			1	247	6.91	**247**	**6.90**		
648.exchange2_s	16	**80.8**	**36.4**	80.6	36.5			1	**80.5**	**36.5**	80.5	36.5		
657.xz_s	16	257	24.0	**257**	**24.0**			16	257	24.1	**257**	**24.0**		

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 17.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-15"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_speed_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu201
     7-1.1.9-aocc500-znerv5_A1.4/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "16"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-15"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

 Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"
```

Platform Notes

```
 BIOS Settings:
                    Logical Processor : Disabled
             Virtualization Technology : Disabled
                 NUMA Nodes Per Socket : 4

                        System Profile : Custom
                               C-States : Disabled
                  Memory Patrol Scrub : Disabled
    PCI ASPM L1 Link Power Management : Disabled
```

(Continued on next page)

Platform Notes (Continued)

```
     Periodic Directory Rinse Tuning : Blended
                Determinism Control : Manual
                 Determinism Slider : Power Determinism
                     Optimizer Mode : Enabled
 Algorithm Performance Boost Disable : Enabled
                                CPPC : Auto
                Adaptive Allocation : Enabled
                 Dram Refresh Delay : Performance
                DIMM Self Healing -
       on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on SLR6711-R6715 Tue Oct 28 09:27:55 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux SLR6711-R6715 6.8.0-86-generic #87-Ubuntu SMP PREEMPT_DYNAMIC Mon Sep 22 18:03:36 UTC 2025 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   09:27:55 up 2 min,  1 user,  load average: 0.31, 0.08, 0.02
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  root     tty1     -                09:25   51.00s  1.24s  0.32s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              3093041
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 /bin/bash /home/DellFiles/bin/DELL_speed.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=6.3b --output_format
   html,pdf,txt
 python3 ./run_amd_speed_aocc500_znver5_A1.py
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define DL-VERS=6.3b
   --output_format html,pdf,txt intspeed
 runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
   DL-VERS=6.3b --output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size
   test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9135 16-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb002151
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 16
    siblings        : 16
    1 physical ids (chips)
    16 processors (hardware threads)
    physical id 0: core ids 0-3,16-19,32-35,48-51
    physical id 0: apicids 0-3,16-19,32-35,48-51
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
```

(Continued on next page)

Platform Notes (Continued)

```
Address sizes:                       52 bits physical, 57 bits virtual
Byte Order:                          Little Endian
CPU(s):                              16
On-line CPU(s) list:                 0-15
Vendor ID:                           AuthenticAMD
BIOS Vendor ID:                      AMD
Model name:                          AMD EPYC 9135 16-Core Processor
BIOS Model name:                     AMD EPYC 9135 16-Core Processor                 CPU @ 3.6GHz
BIOS CPU family:                     107
CPU family:                          26
Model:                               2
Thread(s) per core:                  1
Core(s) per socket:                  16
Socket(s):                           1
Stepping:                            1
Frequency boost:                     enabled
CPU(s) scaling MHz:                  46%
CPU max MHz:                         3650.0000
CPU min MHz:                         1500.0000
BogoMIPS:                            7290.25
Flags:                               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                     pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                     rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                     extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                     sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                     cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                     osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                     perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                     ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                     smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                     avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                     xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                     cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                     xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                                     svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                     pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                     vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                     avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                     movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
                                     flush_l1d debug_swap
L1d cache:                           768 KiB (16 instances)
L1i cache:                           512 KiB (16 instances)
L2 cache:                            16 MiB (16 instances)
L3 cache:                            64 MiB (4 instances)
NUMA node(s):                        4
NUMA node0 CPU(s):                   0-3
NUMA node1 CPU(s):                   4-7
NUMA node2 CPU(s):                   8-11
NUMA node3 CPU(s):                   12-15
Vulnerability Gather data sampling:  Not affected
Vulnerability Itlb multihit:         Not affected
Vulnerability L1tf:                  Not affected
Vulnerability Mds:                   Not affected
Vulnerability Meltdown:              Not affected
Vulnerability Mmio stale data:       Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:              Not affected
Vulnerability Spec rstack overflow:  Not affected
Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        disabled; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     768K   12 Data            1    64        1             64
     L1i       32K     512K    8 Instruction     1    64        1             64
     L2         1M      16M   16 Unified         2  1024        1             64
     L3        16M      64M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-3
  node 0 size: 192824 MB
  node 0 free: 192382 MB
  node 1 cpus: 4-7
  node 1 size: 193533 MB
  node 1 free: 188158 MB
  node 2 cpus: 8-11
  node 2 size: 193490 MB
  node 2 free: 193136 MB
  node 3 cpus: 12-15
  node 3 size: 193489 MB
  node 3 free: 193225 MB
  node distances:
  node   0   1   2   3
    0:  10  12  12  12
    1:  12  10  12  12
    2:  12  12  10  12
    3:  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       791897712 kB

------------------------------------------------------------
10. who -r
  run-level 5 Oct 28 09:25

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local
                   console-setup e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback
                   keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi pollinate
                   secureboot-db setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online
                   systemd-pstore systemd-resolved systemd-timesyncd thermald ufw unattended-upgrades
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell firewalld iscsid nftables serial-getty@
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
```

(Continued on next page)

Platform Notes (Continued)

```
                  systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                  systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                  systemd-time-wait-sync upower
  indirect        systemd-sysupdate systemd-sysupdate-reboot
  masked          cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-86-generic
  root=UUID=fa3d59b1-ab45-4b01-b377-210cfb333189
  ro

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 14:
    current policy: frequency should be within 1.50 GHz and 3.65 GHz.
                    The governor "schedutil" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  3650MHz

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
```

(Continued on next page)

Platform Notes (Continued)

```
  max_ptes_swap             64
  pages_to_scan           4096
  scan_sleep_millisecs   10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.2 LTS

------------------------------------------------------------
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs   40G  3.3G   37G   9% /mnt/ramdisk

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R6715
    Product Family: PowerEdge
    Serial:         SLR6711

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    6x 802C0000802C MTC40F2046S1RC64BD2 64 GB 2 rank 6400, configured at 5200
    5x 80AD000080AD HMCG94AHBRA277N 64 GB 2 rank 6400, configured at 5200
    1x 80AD000080AD HMCG94AHBRA480N 64 GB 2 rank 6400, configured at 5200


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.3.3
   BIOS Date:         06/26/2025
   BIOS Revision:     1.3
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 600.perlbench_s

(Continued on next page)

Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: `-m64 -std=c++14`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp`
`-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3`
`-mllvm -unroll-threshold=100 -zopt`
`-fvirtual-function-elimination -fvisibility=hidden`
`-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang`

623.xalancbmk_s: `-m64 -std=c++14`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast`
`-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp`
`-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3`
`-mllvm -unroll-threshold=100 -zopt`
`-fvirtual-function-elimination -fvisibility=hidden`
`-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp`
`-lamdlibm -lamdalloc-ext -lflang`

631.deepsjeng_s: `-m64 -std=c++14`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp`
`-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3`
`-mllvm -unroll-threshold=100 -zopt`
`-fvirtual-function-elimination -fvisibility=hidden`
`-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

641.leela_s: `Same as 631.deepsjeng_s`

Fortran benchmarks:
`-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4`
`-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM`
`-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost`
`-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp`
`-lomp -lamdlibm -lamdalloc -lflang`

Peak Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-28 05:27:54-0400.
Report generated on 2025-12-03 14:24:36 by CPU2017 PS formatter v6716.
Originally published on 2025-12-02.