SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2025
Hardware Availability: Aug-2025
Software Availability: Sep-2025

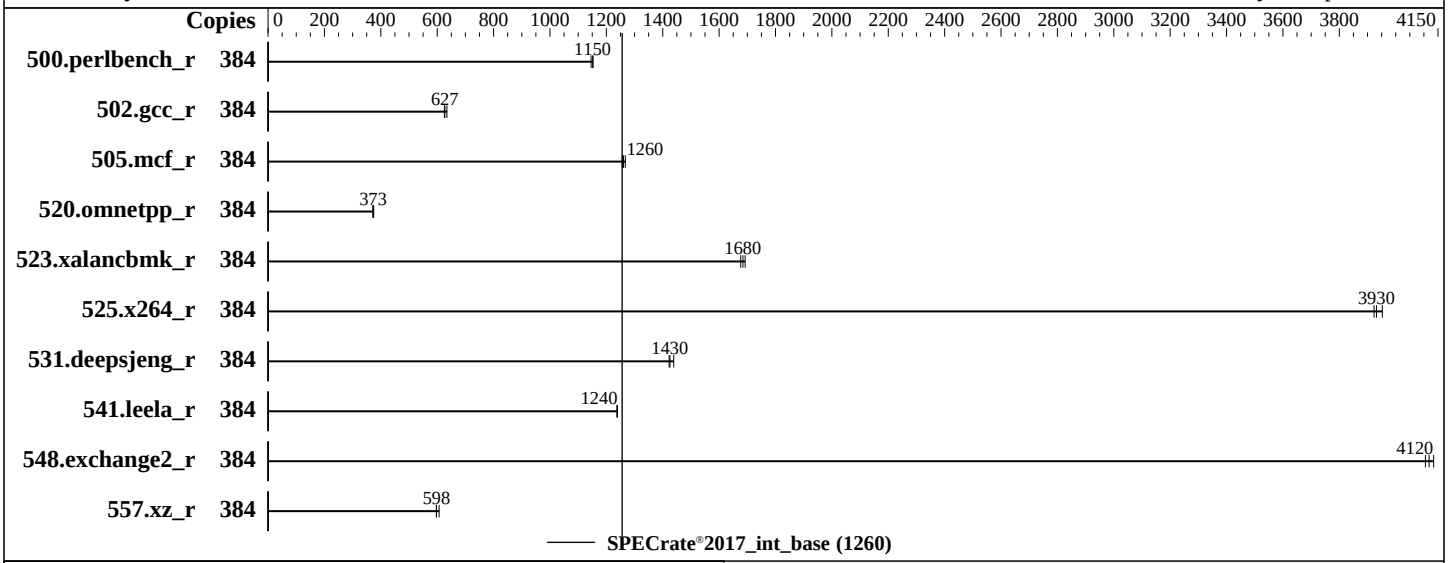

Hardware

CPU Name:	AMD EPYC 9965
Max MHz:	3700
Nominal:	2250
Enabled:	192 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 16 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 4000)
Storage:	1 x 3.2 TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 24.04.2 LTS Kernel 6.8.0-86-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	HPE BIOS Version 1.30 09/05/2025 released Sep-2025
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS was set to prefer performance at the cost of additional power

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant Compute DL345 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2025
Hardware Availability: Aug-2025
Software Availability: Sep-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	530	1150	533	1150	**531**	**1150**							
502.gcc_r	384	857	635	**867**	**627**	869	626							
505.mcf_r	384	490	1270	**492**	**1260**	494	1260							
520.omnetpp_r	384	1344	375	1355	372	**1351**	**373**							
523.xalancbmk_r	384	240	1690	**241**	**1680**	242	1680							
525.x264_r	384	170	3950	**171**	**3930**	171	3920							
531.deepsjeng_r	384	306	1440	309	1420	**309**	**1430**							
541.leela_r	384	513	1240	514	1240	**513**	**1240**							
548.exchange2_r	384	**244**	**4120**	243	4130	245	4110							
557.xz_r	384	684	607	**694**	**598**	695	597							

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration on the SUT hosting this virtual machine instance:
Workload Profile set to General Throughput Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
NUMA memory domains per socket set to Four memory domains per socket
Thermal Configuration set to Maximum Cooling

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on ubuntubm Tue Oct 28 18:58:28 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
1. uname -a
  Linux ubuntubm 6.8.0-86-generic #87-Ubuntu SMP PREEMPT_DYNAMIC Mon Sep 22 18:03:36 UTC 2025 x86_64 x86_64
  x86_64 GNU/Linux

------------------------------------------------------------
2. w
   18:58:28 up 2 min,  3 users,  load average: 0.46, 0.28, 0.11
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  bmtest            172.17.1.80      18:57    2:19   0.00s  0.01s sshd: bmtest [priv]
  bmtest            172.17.1.80      18:57    2:19   0.00s   ?    sshd: bmtest [priv]
  bmtest   tty1     -                18:57    1:23   0.03s   ?    -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       bmtest

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              6190304
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: bmtest [priv]
 sshd: bmtest@pts/0
 -bash
 sudo bash
 sudo bash
 bash
 python3 ./run_intrate.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 intrate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
   --runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.011/templogs/preenv.intrate.011.0.log --lognum 011.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9965 192-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
```

(Continued on next page)

Platform Notes (Continued)

```
     microcode       : 0xb10104f
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
     TLB size        : 192 4K pages
     cpu cores       : 192
     siblings        : 384
     1 physical ids (chips)
     384 processors (hardware threads)
     physical id 0: core ids 0-191
     physical id 0: apicids 0-383
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               384
   On-line CPU(s) list:                  0-383
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       Advanced Micro Devices, Inc.
   Model name:                           AMD EPYC 9965 192-Core Processor
   BIOS Model name:                      AMD EPYC 9965 192-Core Processor                CPU @ 2.2GHz
   BIOS CPU family:                      107
   CPU family:                           26
   Model:                                17
   Thread(s) per core:                   2
   Core(s) per socket:                   192
   Socket(s):                            1
   Stepping:                             0
   BogoMIPS:                             4492.79
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                         extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                         sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                         cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                         osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                         perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                         ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                         smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                         avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                         xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                         xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                                         svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                         pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                         vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                         avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                         movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                         flush_l1d debug_swap
   Virtualization:                       AMD-V
   L1d cache:                            9 MiB (192 instances)
   L1i cache:                            6 MiB (192 instances)
   L2 cache:                             192 MiB (192 instances)
   L3 cache:                             384 MiB (12 instances)
   NUMA node(s):                         4
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node0 CPU(s):                    0-47,192-239
  NUMA node1 CPU(s):                    48-95,240-287
  NUMA node2 CPU(s):                    96-143,288-335
  NUMA node3 CPU(s):                    144-191,336-383
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1    64        1             64
     L1i       32K       6M    8 Instruction     1    64        1             64
     L2         1M     192M   16 Unified         2  1024        1             64
     L3        32M     384M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-47,192-239
  node 0 size: 386660 MB
  node 0 free: 385265 MB
  node 1 cpus: 48-95,240-287
  node 1 size: 387039 MB
  node 1 free: 386126 MB
  node 2 cpus: 96-143,288-335
  node 2 size: 386996 MB
  node 2 free: 386044 MB
  node 3 cpus: 144-191,336-383
  node 3 size: 386957 MB
  node 3 free: 384804 MB
  node distances:
  node   0   1   2   3
    0:  10  12  12  12
    1:  12  10  12  12
    2:  12  12  10  12
    3:  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584797520 kB

------------------------------------------------------------
10. who -r
  run-level 5 Oct 28 18:56

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
```

(Continued on next page)

Platform Notes (Continued)

```
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                   networkd-dispatcher nvmefc-boot-connections nvmf-autoconnect open-iscsi open-vm-tools
                   pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd
                   systemd-networkd-wait-online systemd-pstore systemd-resolved thermald ua-reboot-cmds
                   ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                   systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                   systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd upower
  indirect         systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-6.8.0-86-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 189:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2250MHz

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.zone_reclaim_mode               1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.2 LTS

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem                     Type  Size  Used Avail Use% Mounted on
  /dev/mapper/ubuntu--vg-ubuntu--lv ext4  2.9T   21G  2.8T   1% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        HPE ProLiant Compute DL345 Gen12
    Product Family: ProLiant
    Serial:         SANJACSCM

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    1x Hynix HMCG94AHBRA480N 64 GB 2 rank 6400, configured at 4000
    8x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400, configured at 4000
    15x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 4000


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      1.30
   BIOS Date:         09/05/2025
   BIOS Revision:     1.30
   Firmware Revision: 1.18
```

Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.6.html`
`http://www.spec.org/cpu2017/flags/aocc500-flags.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.6.xml`
`http://www.spec.org/cpu2017/flags/aocc500-flags.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-28 14:58:27-0400.
Report generated on 2025-12-16 21:31:50 by CPU2017 PS formatter v6716.
Originally published on 2025-12-16.