# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

## FusionServer 2288 V8 (Intel Xeon 6766E)

**SPECrate®2017_fp_base = 1120**

**SPECrate®2017_fp_peak = 1150**

**CPU2017 License:** 6488
**Test Sponsor:** xFusion
**Tested by:** xFusion

**Test Date:** Nov-2025
**Hardware Availability:** May-2025
**Software Availability:** Apr-2024

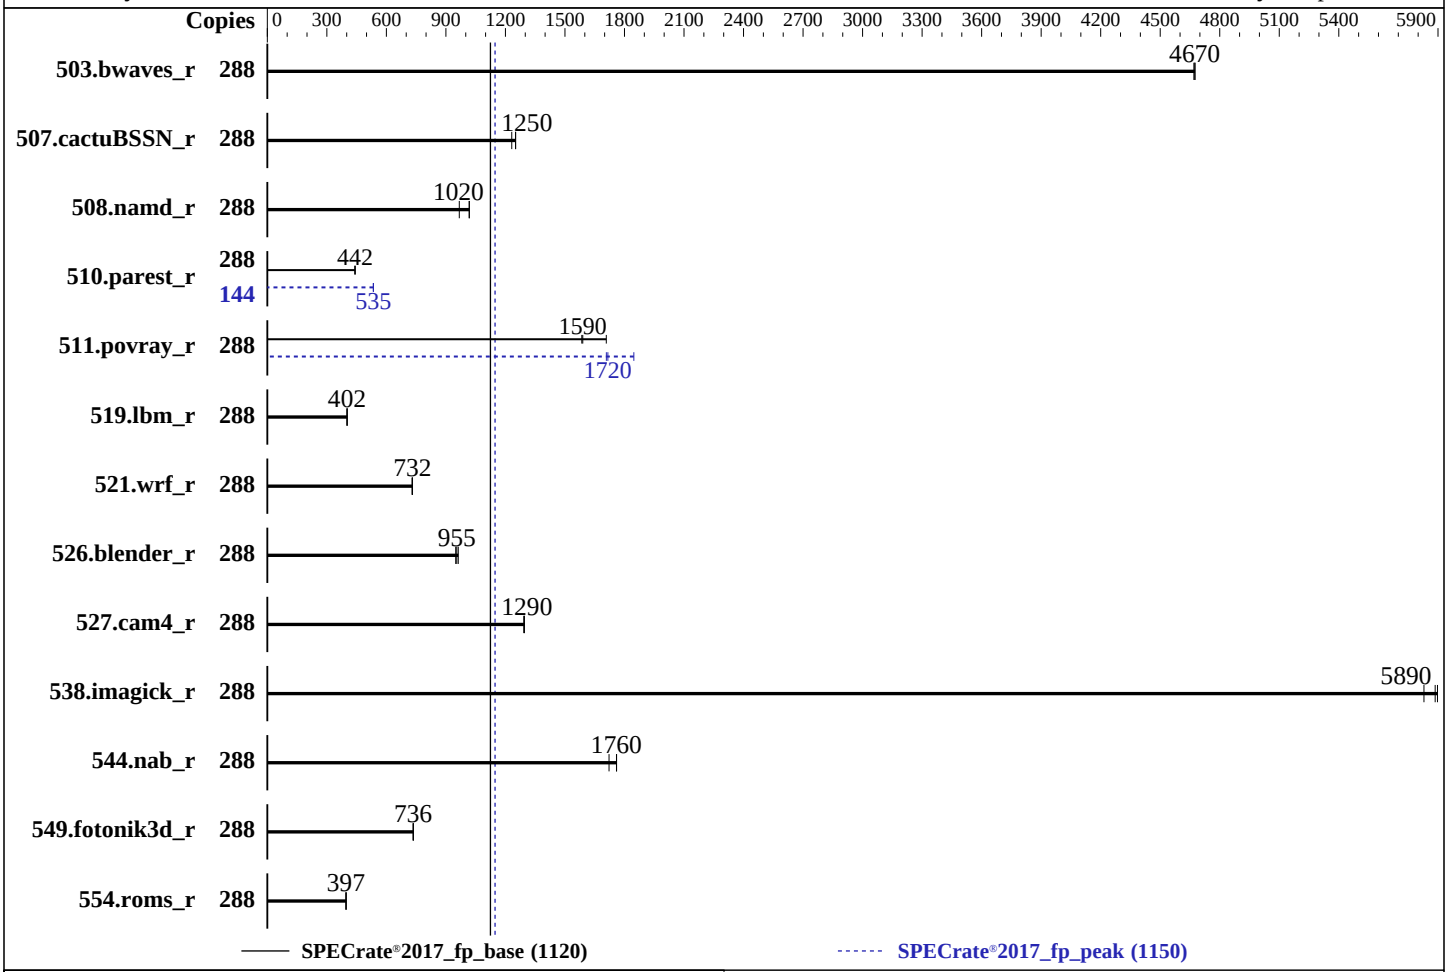


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon 6766E |
| Max MHz: | 2700 |
| Nominal: | 1900 |
| Enabled: | 288 cores, 2 chips |
| Orderable: | 1,2 chips |
| Cache L1: | 64 KB I + 32 KB D on chip per core |
| L2: | 4 MB I+D on chip per core |
| L3: | 108 MB I+D on chip per chip |
| Other: | None |
| Memory: | 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R) |
| Storage: | 1 x 960 GB SATA SSD |
| Other: | CPU Cooling: Air |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 9.4 (Plow)<br>5.14.0-427.13.1.el9_4.x86_64 |
| Compiler: | C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;<br>Fortran: Version 2024.1 of Intel Fortran Compiler for Linux; |
| Parallel: | No |
| Firmware: | Version 01.31.01.16 released Nov-2025 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

## FusionServer 2288 V8 (Intel Xeon 6766E)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1150

**CPU2017 License:** 6488
**Test Sponsor:** xFusion
**Tested by:** xFusion

**Test Date:** Nov-2025
**Hardware Availability:** May-2025
**Software Availability:** Apr-2024

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 288 | 618 | 4670 | 618 | 4680 | **618** | **4670** | 288 | 618 | 4670 | 618 | 4680 | **618** | **4670** |
| 507.cactuBSSN_r | 288 | 296 | 1230 | 291 | 1250 | **291** | **1250** | 288 | 296 | 1230 | 291 | 1250 | **291** | **1250** |
| 508.namd_r | 288 | 269 | 1020 | **269** | **1020** | 283 | 967 | 288 | 269 | 1020 | **269** | **1020** | 283 | 967 |
| 510.parest_r | 288 | **1704** | **442** | 1704 | 442 | 1705 | 442 | 144 | 704 | 535 | 705 | 534 | **704** | **535** |
| 511.povray_r | 288 | 424 | 1580 | **423** | **1590** | 394 | 1710 | 288 | 394 | 1710 | 364 | 1850 | **392** | **1720** |
| 519.lbm_r | 288 | 755 | 402 | **755** | **402** | 755 | 402 | 288 | 755 | 402 | **755** | **402** | 755 | 402 |
| 521.wrf_r | 288 | **882** | **732** | 885 | 729 | 882 | 732 | 288 | **882** | **732** | 885 | 729 | 882 | 732 |
| 526.blender_r | 288 | 456 | 962 | 462 | 949 | **459** | **955** | 288 | 456 | 962 | 462 | 949 | **459** | **955** |
| 527.cam4_r | 288 | 389 | 1290 | **389** | **1290** | 389 | 1300 | 288 | 389 | 1290 | **389** | **1290** | 389 | 1300 |
| 538.imagick_r | 288 | 121 | 5900 | **122** | **5890** | 123 | 5830 | 288 | 121 | 5900 | **122** | **5890** | 123 | 5830 |
| 544.nab_r | 288 | **275** | **1760** | 281 | 1720 | 275 | 1760 | 288 | **275** | **1760** | 281 | 1720 | 275 | 1760 |
| 549.fotonik3d_r | 288 | 1527 | 735 | **1526** | **736** | 1526 | 736 | 288 | 1527 | 735 | **1526** | **736** | 1526 | 736 |
| 554.roms_r | 288 | 1151 | 397 | **1154** | **397** | 1155 | 396 | 288 | 1151 | 397 | **1154** | **397** | 1155 | 396 |

**SPECrate®2017_fp_base = 1120**

**SPECrate®2017_fp_peak = 1150**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/QYL/cpu2017/lib/intel64:/home/QYL/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

**(Continued on next page)**

## General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
 BIOS configuration:
 Performance Profile Set to Performance
 Latency Optimized Mode Set to Enabled

 Sysinfo program /home/QYL/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Wed Nov 26 01:54:25 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-32.el9_4)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
   2024 x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    01:54:25 up  6:12,  1 user,  load average: 140.22, 248.05, 271.83
   USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1      19:41    6:11m  1.76s  0.11s sh run_rate.sh
```

**(Continued on next page)**

## Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 2059605
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 2059605
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 31
 login -- root
 -bash
 sh run_rate.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 -c
   ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=144 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all
   fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 --configfile
   ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=144 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
   --output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/QYL/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6766E
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 175
    stepping        : 3
    microcode       : 0x3000362
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 144
    siblings        : 144
    2 physical ids (chips)
    288 processors (hardware threads)
    physical id 0: core ids 0-143
    physical id 1: core ids 0-143
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
```

(Continued on next page)

## Platform Notes (Continued)

```
    ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
    32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
    4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
    ,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
    physical id 1: apicids
    512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
    64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
    6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668
    ,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,
    722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758,760,762,764,766,768,770,772,7
    74,776,778,780,782,784,786,788,790,792,794,796,798
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 48 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               288
  On-line CPU(s) list:                  0-287
  Vendor ID:                            GenuineIntel
  BIOS Vendor ID:                       Intel(R) Corporation
  Model name:                           Intel(R) Xeon(R) 6766E
  BIOS Model name:                      Intel(R) Xeon(R) 6766E
  CPU family:                           6
  Model:                                175
  Thread(s) per core:                   1
  Core(s) per socket:                   144
  Socket(s):                            2
  Stepping:                             3
  BogoMIPS:                             3800.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                                        xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                                        dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                                        sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                                        rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority
                                        ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
                                        cqm rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt
                                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                        split_lock_detect avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi
                                        umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
                                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
                                        arch_lbr ibt flush_l1d arch_capabilities
  Virtualization:                       VT-x
  L1d cache:                            9 MiB (288 instances)
  L1i cache:                            18 MiB (288 instances)
  L2 cache:                             288 MiB (72 instances)
  L3 cache:                             216 MiB (2 instances)
  NUMA node(s):                         2
  NUMA node0 CPU(s):                    0-143
  NUMA node1 CPU(s):                    144-287
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  Vulnerability L1tf:                 Not affected
  Vulnerability Mds:                  Not affected
  Vulnerability Meltdown:             Not affected
  Vulnerability Mmio stale data:      Not affected
  Vulnerability Retbleed:             Not affected
  Vulnerability Spec rstack overflow: Not affected
  Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                                      PBRSB-eIBRS Not affected
  Vulnerability Srbds:                Not affected
  Vulnerability Tsx async abort:      Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       9M    8 Data            1     64        1             64
     L1i       64K      18M    8 Instruction     1    128        1             64
     L2         4M     288M   16 Unified         2   4096        1             64
     L3       108M     216M   12 Unified         3 147456        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-143
  node 0 size: 256996 MB
  node 0 free: 255451 MB
  node 1 cpus: 144-287
  node 1 size: 257946 MB
  node 1 free: 256288 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       527302360 kB

------------------------------------------------------------
10. who -r
  run-level 3 Nov 25 19:41

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-32.el9_4)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
                  dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
                  lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon
                  selinux-autorelabel-mark sep5 sshd sssd systemd-boot-update systemd-network-generator
```

**(Continued on next page)**

## Platform Notes (Continued)

```
                  udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot console-getty cpupower debug-shell dnf-system-upgrade
                   kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts
                   rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
                   systemd-boot-check-no-failures systemd-pstore systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                   systemd-sysupdate-reboot

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
  root=/dev/mapper/rhel-root
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 19:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.4 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
  system-release Red Hat Enterprise Linux release 9.4 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/QYL/cpu2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   819G   25G  794G   4% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Product:        2288 V8
    Product Family: Birch Stream

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M321R4GA3EB2-CCPWF 32 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       INSYDE Corp.
   BIOS Version:      01.31.01.16
   BIOS Date:         11/13/2025
   BIOS Revision:     1.16
```

## Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:
`-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

## Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

## Peak Portability Flags

`Same as Base Portability Flags`

## Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `basepeak = yes`

Benchmarks using both Fortran and C:

521.wrf_r: `basepeak = yes`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2 -flto -Ofast -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.5.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.5.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.9 on 2025-11-25 12:54:24-0500.
Report generated on 2025-12-16 21:33:16 by CPU2017 PS formatter v6716.
Originally published on 2025-12-16.